




Easy 3 Colors
SELECCTOR
3000K • 3500K • 4000K

IP40 ETL US 5 FLICKER FREE

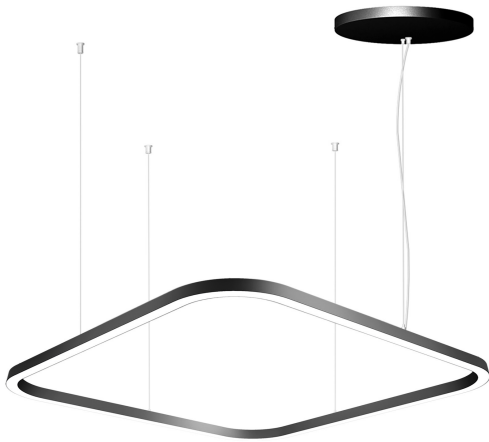

FEATURES

The LOOP MINI SQUARE LED Suspended Direct light is an advanced, high-performance luminaire designed to visually elevate a space through its style and uninterrupted, even, glow.

Built from a single, continuous extruded aluminum profile, the luminaire is available in a compact size of 1.38" W x 1.38" H. A flexible polycarbonate diffuser allows for simplified installation while maintaining a clean, minimalist appearance.

Available in three different sizes and three lumen outputs, for a variety of design options. An internal driver and adjustable CCT switch inside the canopy allow for versatile color temperature transitions during or after installation, to suit different atmospheres.

Two suspended mounting options (central canopy and side canopy) with an adjustable cord allow for playful positioning at various angles, alone, or in group or "cluster" mountings.

Available in classic black or white finishes or custom RAL colors to seamlessly complement any interior style. Ideal for transforming office, commercial, lobby, and hospitality lighting into an artful experience.

Two Suspended Mounting Options Included		SIZE	LUMENS	WATTS
Central Canopy	Side Canopy	23" X 23"	4000L	40W
		35" X 35"	6000L	60W
		47" X 47"	8000L	80W




Side canopy mounting shown.

TECHNICAL DETAILS

Lumens	4000L, 6000L, 8000L
CCT	3000K/3500K/4000K
CRI	90+
Power	40W, 60W, 80W
Square Size	23" x 23", 35" x 35", 47" x 47"
Mounting	Suspended Mount (Adjustable 11-ft length cords)
IP Rating	IP40
Color	● White ● Black ● Custom RAL

Input Voltage	120-277 VAC
Efficiency	100L/W
Dimming	0-10V Dimming
Life Time	L80B20 at 50,000 hours
Material	Aluminum Body / PC Diffuser
Accessories: (Included)	1 Central Canopy
	1 Side Canopy
"Side canopy or central canopy mounting options".	1 Wire Holder
	4 Suspension Cables

IP40 ETL US 5 FLICKER FREE

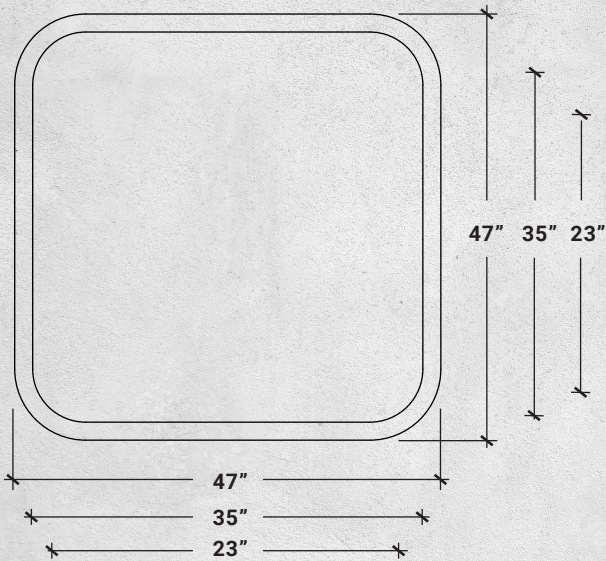

SIZES

23" x 23"	Width 1.38" / Height 1.38"
35" x 35"	Width 1.38" / Height 1.38"
47" x 47"	Width 1.38" / Height 1.38"



FLICKER FREE

Example: LOOP-MINI-SQ-LED-1.3-23X23-4000L-DIM10-MVOLT-30K/35K/40K-90-WH-SM

SERIES	PROFILE SIZE	LUMINAIRE SIZE	LUMENS	DIMMING/VOLTAGE	CCT
LOOP-MINI-SQ-LED	1.3 -1.38"	23X23 - 23.4"x23.4" 35X35 - 35.2"x35.2" 47X47 - 47.1"x47.1"	4000L - 4000L 6000L - 6000L 8000L - 8000L	DIM10-MVOLT ¹	30K/35K/40K - 3000K-3500K-4000K

CRI	COLOR	EMERGENCY	MOUNTING
90 -90+	WH - White BK - Black RAL - Consult factory	REM-EMG-LED-25W-HV-FLEX ² REM-EMG-LED-15W-HV-FLEX ²	SM - Suspended Mount ³

1. For more dimming options, please consult factory.

2. Remote emergency option.


3. The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is desired, it must be modified in the field.

Note: The lead time for all options listed above is approximately 4-5 weeks due to their mini profile and specialized technology.


Mounting Options

The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is desired, it must be modified in the field.

Side Canopy Mounting


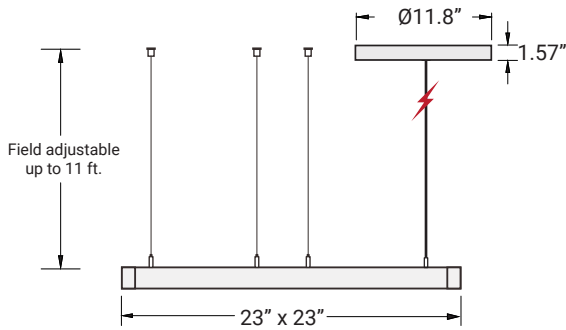


Central Canopy Mounting

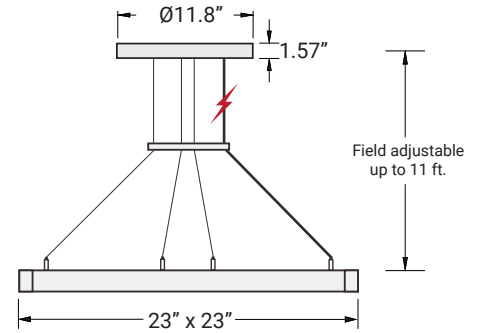



⚡ 1 Power cable

The driver and CCT switch are located inside the canopy. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

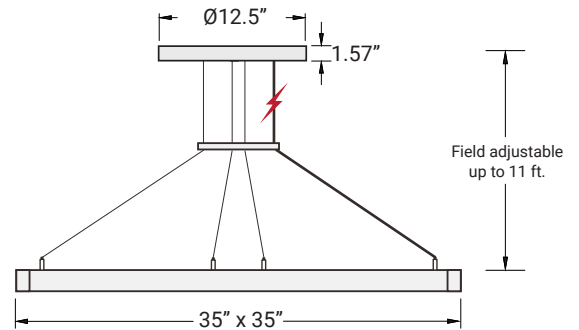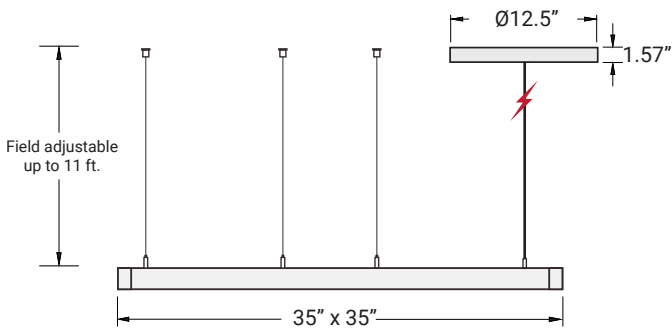

⚡ 1 Power cable

The driver and CCT switch are located inside the canopy. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

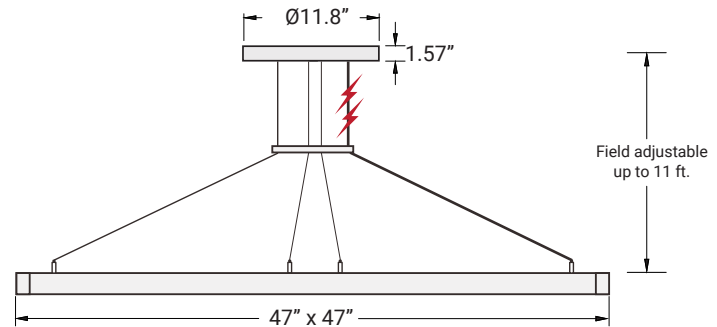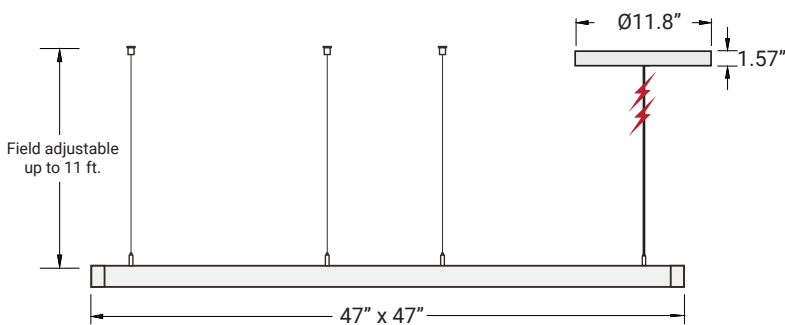

⚡ 2 Power cables

The driver and CCT switch are located inside the canopy. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.