




FEATURES

The LOOP Round Open Frame LED Suspended Direct luminaire is defined by its open-sided profile, enabling a flexible and modular approach to architectural lighting. The intentional opening allows multiple fixtures to interconnect, overlap, or nest within one another—creating dynamic compositions and continuous lighting forms.

Built as a single extruded aluminum profile, the luminaire is available in 2.3" W × 2.3" H. The open segment, ranging from 6" to 12" depending on fixture size, is paired with a flexible polycarbonate diffuser to maintain uniform, uninterrupted illumination while preserving the integrity of the form.

Available in three different sizes and three lumen outputs, for a variety of design options. An internal driver and adjustable CCT switch inside the profile allow for versatile color temperature transitions during or after installation, to suit different atmospheres.

Side canopy mounting option available with adjustable cords that allow for playful positioning at various angles, either individually or in group or "cluster" configurations. Available in classic black or white finishes, as well as custom RAL colors, to seamlessly complement any interior style. Ideal for transforming office, commercial, lobby, and hospitality spaces into an artful lighting experience.

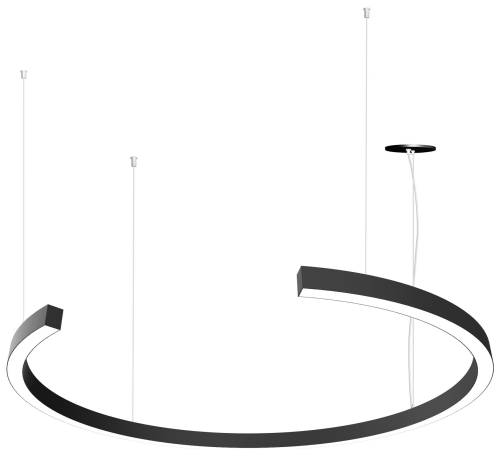





TECHNICAL DETAILS

Side Canopy Mounting	SIZE	LUMENS	WATTS
	26" x 24"	3500L	35W
	37" x 34"	5500L	55W
	47" x 44"	7500L	75W


Lumens	3500L, 5500L, 7500L
CCT	3000K/3500K/4000K
CRI	90+
Power	35W, 55W, 75W
Dimensions	26" x 24", 37" x 34", 47" x 44"
Mounting	Suspended Mount (Adjustable 11ft length cords)
IP Rating	IP40

Color	● White ● Black ● Custom RAL
Input Voltage	120-277 VAC
Efficiency	100L/W
Dimming	0-10V Dimming
Life Time	L80B20 at 50,000 hours
Material	Aluminum Body / PC Diffuser

DIMENSIONS

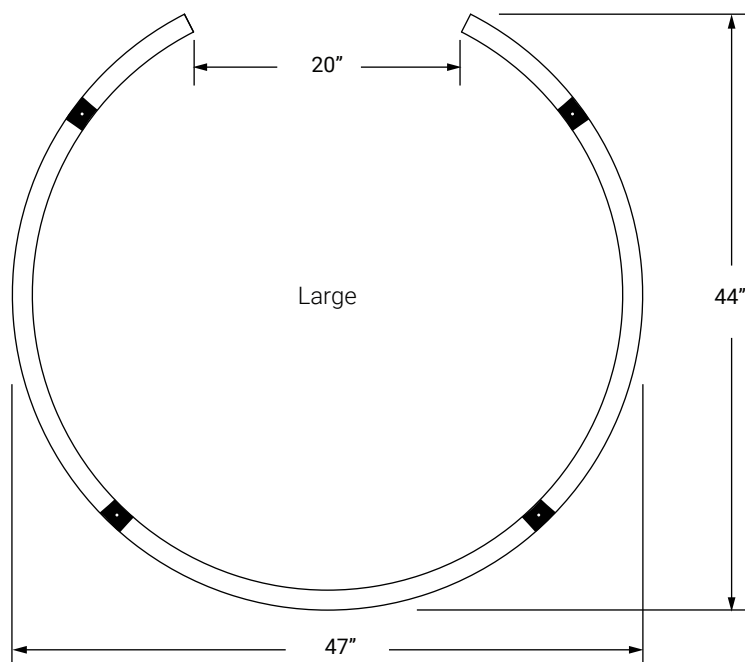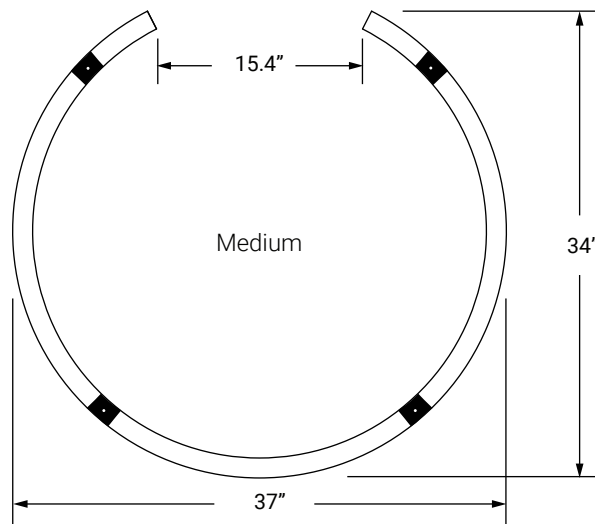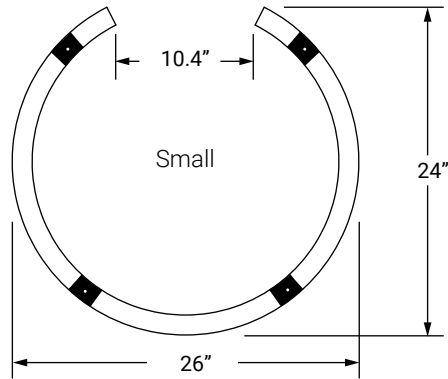


Side Canopy Mounting

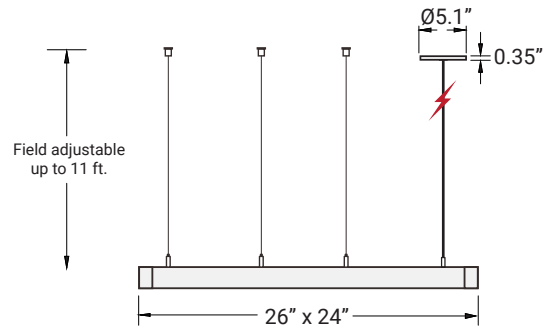


⚡ 1 Power cable

The driver and CCT switch are located inside the fixture. The luminaire comes with 4 suspension cables, each 11ft in length, and 1 side canopy. Please note that the lead time for this fixture is approximately 4–5 weeks due to its open frame profile and specialized technology.

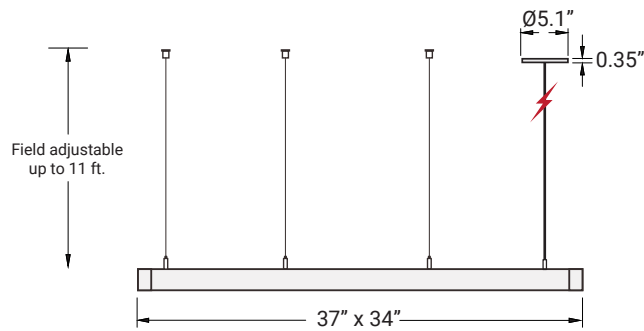

⚡ 1 Power cable

The driver and CCT switch are located inside the fixture. The luminaire comes with 4 suspension cables, each 11ft in length, and 1 side canopy. Please note that the lead time for this fixture is approximately 4–5 weeks due to its open frame profile and specialized technology.

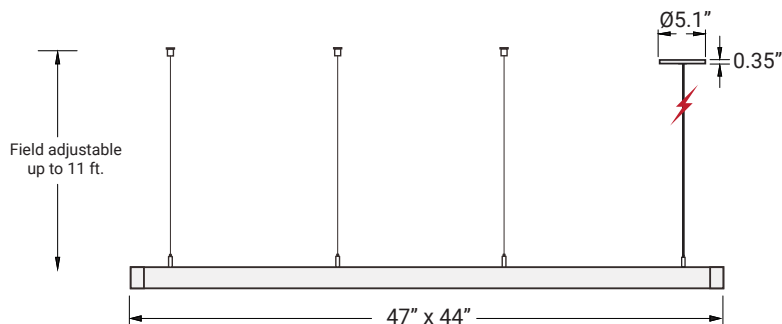

⚡ 1 Power cable

The driver and CCT switch are located inside the fixture. The luminaire comes with 4 suspension cables, each 11ft in length, and 1 side canopy. Please note that the lead time for this fixture is approximately 4–5 weeks due to its open frame profile and specialized technology.



Easy 3 Colors
SELECTOR
3000K - 3500K - 4000K



FLICKER FREE

Example: LOOP-OPF-RD-LED-2-26X24-3500L-DIM10-MVOLT-30K/35K/40K-90-WH-SM

SERIES	PROFILE SIZE	LUMINAIRE SIZE	LUMENS	DIMMING/VOLTAGE			CRI	COLOR
LOOP-OPF-RD-LED	2 - 2.3"X2.3"	26X24 - 26.0"X24.5" 37X34 - 37.0"X34.9" 47X44 - 47.2"X44.6"	3500L - 3500L 5500L - 5500L 7500L - 7500L	DIM10-MVOLT ¹		CCT	90 -90+	WH - White BK - Black RAL- Consult factory
							30K/35K/40K - 3000K-3500K-4000K	
EMERGENCY	MOUNTING							
REM-EMG-LED-25W-HV-FLEX ² REM-EMG-LED-15W-HV-FLEX ²	SM -Suspended Mount							

1. For more dimming options, please consult factory.
2. Remote emergency option.

Note: The lead time for all options listed above is approximately 4-5 weeks due to their open frame profile and specialized technology.