



**FEATURES**

Transform light into an artful experience with this Suspended Double Ringed Downlight, defined by a combination of modern aesthetics, high performance, and seamless light distribution.

An elegant, tiered ring design reinterprets the decadence of a traditional chandelier for modern design, while an integrated driver and selectable lumen and CCT switches enable easy installation and versatile lighting at the flick of a switch. Adjustable 11 ft suspension cables provide flexibility to customize ring angles and orientation, and to arrange the sizes from large to small or small to large.


Built with a one-piece flexible PC diffuser and a durable and lightweight aluminum body. Central canopy mounting only. Driver integrated into canopy profile, alongside lumen and CCT switches.

Available in classic Black or White color options or a range of RAL colors to seamlessly complement any interior style.



| RING SIZE | LUMENS             | WATTS       | CCT               |
|-----------|--------------------|-------------|-------------------|
| Ø26"      | 2500L/4000L/5000L  | 20W/30W/40W | 3000K/3500K/4000K |
| Ø47"      | 8000L/9000L/10500L | 60W/70W/80W | 3000K/3500K/4000K |

- Double-ring downlight, Ø26" and Ø47"
- Lumen adjustable by DIP switch
- Multi-CCT adjustable by DIP switch
- Integrated driver located in the canopy

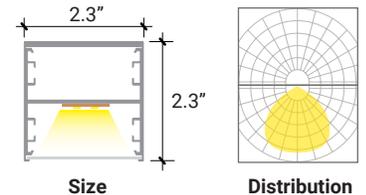


**TECHNICAL DETAILS**

|                      |   |
|----------------------|---|
| <b>Input Voltage</b> | 120-277 VAC                                     |
| <b>CRI</b>           | 90+   |
| <b>Efficiency</b>    | 130 lm/W  |
| <b>Dimming</b>       | 0-10V Dimming                                   |
| <b>Mounting</b>      | Suspended Mount (Adjustable 11-ft length cords) |

|                  |                              |
|------------------|------------------------------|
| <b>IP Rating</b> | IP40                         |
| <b>Material</b>  | Aluminum Body / PC Diffuser  |
| <b>Life Time</b> | L80B20 at 50,000 hours       |
| <b>Color</b>     | ● White ● Black ● Custom RAL |



SIZE

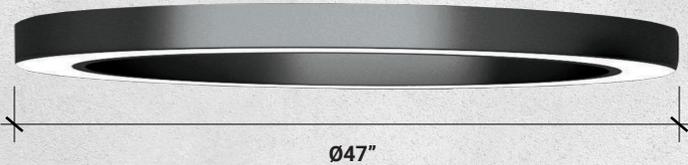

LOOP  
LED GEOMETRIC PENDANTS




Adjustable 11 ft suspension cables provide flexibility to customize ring angles and orientation, and to arrange the sizes from large to small or small to large.

Example: LOOP-RD-2RM-LED-2-47-39000-DIM10-MVOLT-30K/35K/40K-90-WH-SM

| SERIES            | LUMINAIRE SIZE | LUMENS                     | DIMMING/VOLTAGE          | CCT                             | CRI     | COLOR   | EMERGENCY  | MOUNTING             |
|-------------------|----------------|----------------------------|--------------------------|---------------------------------|---------|---|--|----------------------|
| LOOP-RD-2RM-LED-2 | 47 - Ø26"/Ø47" | <sup>1</sup> 39000 - 39000 | <sup>2</sup> DIM10-MVOLT | 30K/35K/40K - 3000K-3500K-4000K | 90 -90+ | WH - White<br>BK - Black<br>RAL - Consult factory | <sup>3</sup> REM-EMG-LED-25W-HV-FLEX<br><sup>3</sup> REM-EMG-LED-15W-HV-FLEX | SM - Suspended Mount |

1. 39,000 lumens refers to the total combined output of both rings. For the specific lumen output of each individual ring, please refer to the first page.  
 2. For more dimming options, please consult factory.  
 3. Remote emergency option, please consult factory.

Central Canopy Mounting

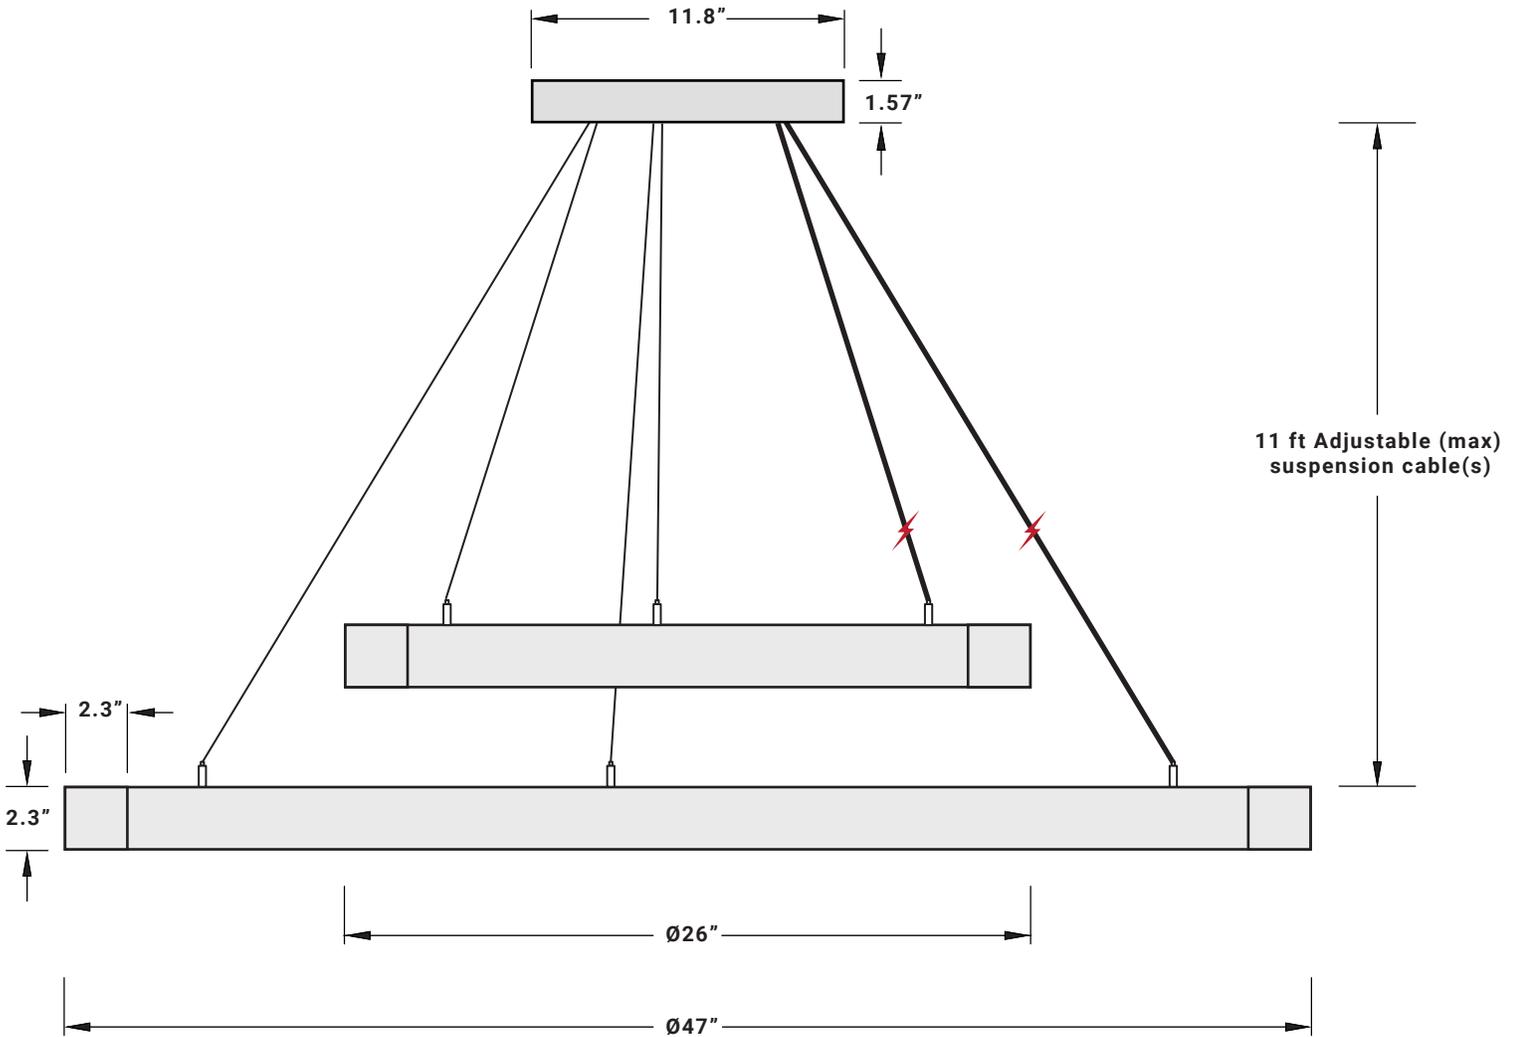

 2 Power cables

The drivers, power-adjustable switch, and CCT switch are located inside the canopy. The luminaire comes with 6 suspension cables (11 ft each), 2 power cables, and 1 central canopy.