



FEATURES

Transform light into an artful experience with this Suspended Double Ringed luminaire, defined by a combination of modern aesthetics, high performance, and seamless light distribution.

An elegant, tiered ring design reinterprets the decadence of a traditional chandelier for modern design, while an integrated driver and selectable lumen and CCT switches enable easy installation and versatile lighting at the flick of a switch.

Direct and indirect distributions elevate ambiance with an atmospheric glow. Adjustable 11 ft suspension cables provide flexibility to customize ring angles and orientation, and to arrange the sizes from large to small or small to large.


Built with a one-piece flexible PC diffuser and a durable and lightweight aluminum body. Central canopy mounting only. Driver integrated into canopy profile, alongside lumen and CCT switches.

Available in classic Black or White color options or a range of RAL colors to seamlessly complement any interior style.



RING SIZE	LUMENS	WATTS	CCT
Ø35"	Up 5000L/6500L/8000L	Up 40W/50W/60W	3000K/3500K/4000K
	Down 5000L/6500L/8000L	Down 40W/50W/60W	
Ø47"	Up 8000L/9000L/10500L	Up 60W/70W/80W	3000K/3500K/4000K
	Down 8000L/9000L/10500L	Down 60W/70W/80W	

- Double-ring Up & downlight, Ø35" and Ø47"
- Lumen adjustable by DIP switch
- Multi-CCT adjustable by DIP switch
- Integrated driver located in the canopy

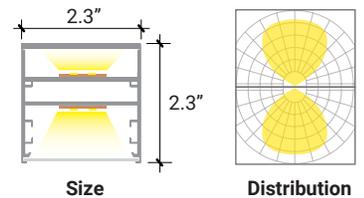


TECHNICAL DETAILS

Input Voltage	120-277 VAC
CRI	90+
Efficiency	130 lm/W
Dimming	0-10V Dimming
Mounting	Suspended Mount (Adjustable 11-ft length cords)

IP Rating	IP40
Material	Aluminum Body / PC Diffuser
Life Time	L80B20 at 50,000 hours
Color	● White ● Black ● Custom RAL



SIZE

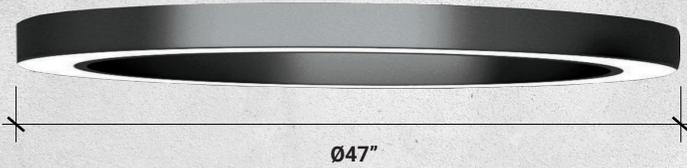

LOOP

LED GEOMETRIC PENDANTS




Adjustable 11 ft suspension cables provide flexibility to customize ring angles and orientation, and to arrange the sizes from large to small or small to large.

Example: LOOP-RD-DI-2RL-LED-2-35-94000-DIM10-MVOLT-30K/35K/40K-90-WH-SM

SERIES	LUMINAIRE SIZE	LUMENS	DIMMING/VOLTAGE	CCT	CRI	COLOR	EMERGENCY	MOUNTING
LOOP-RD-DI-2RL-LED-2	35 - Ø35"/Ø47"	¹ 94000 - 94000	² DIM10-MVOLT	30K/35K/40K - 3000K-3500K-4000K	90 -90+	WH -White BK -Black RAL-Consult factory	³ REM-EMG-LED-25W-HV-FLEX ³ REM-EMG-LED-15W-HV-FLEX	SM - Suspended Mount

1. 94,000 lumens refers to the total combined output (upward and downward) of both rings. For the specific lumen output of each individual ring, please refer to the first page.
 2. For more dimming options, please consult factory.
 3. Remote emergency option, please consult factory.

Central Canopy Mounting

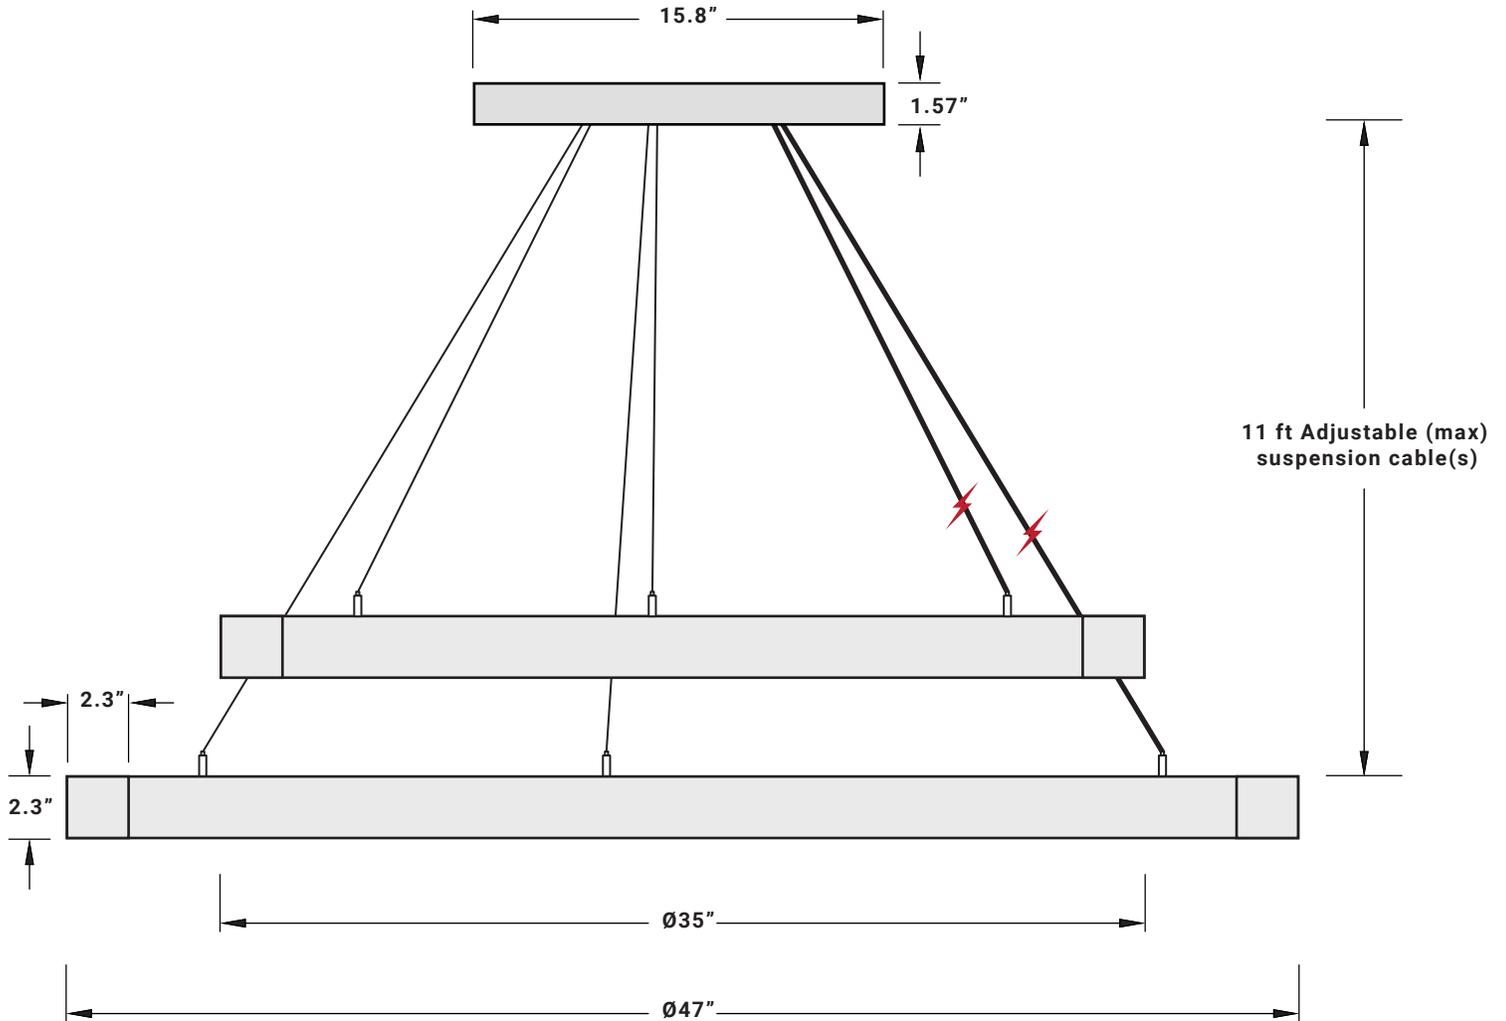

 2 Power cables

The drivers, power-adjustable switch, and CCT switch are located inside the canopy. The luminaire comes with 6 suspension cables (11 ft each), 2 power cables, and 1 central canopy.