ORACLE LIGHTING

LOOP-RD-DI-3R-LED-2

Round LED Suspended Triple Ring Direct/Indirect Light with Multi-lumen/CCT

FEATURES

Transform light into an artful experience with this Suspended Triple Ringed luminaire, defined by a combination of modern aesthetics, high performance, and seamless light distribution.

An elegant, tiered ring design reinterprets the decadence of a traditional chandelier for modern design, while an integrated driver and selectable lumen and CCT switches enable easy installation and versatile lighting at the flick of a switch.

Direct and indirect distributions elevate ambiance with an atmospheric glow. Adjustable 11 ft suspension cables provide flexibility to customize ring angles and orientation, and to arrange the sizes from large to small or small to large.

Built with a one-piece flexible PC diffuser and a durable and lightweight aluminum body. Central canopy mounting only. Driver integrated into canopy profile, alongside lumen and CCT switches.

Available in classic Black or White color options or a range of RAL colors to seamlessly complement any interior style.

RING SIZE	LUMENS		WATTS		CCT
Ø26”	**Up**	2500L/4000L/5000L	**Up**	20W/30W/40W	3000K/3500K/4000K
	Down	2500L/4000L/5000L	**Down**	20W/30W/40W	
Ø35”	**Up**	5000L/6500L/8000L	**Up**	40W/50W/60W	3000K/3500K/4000K
	Down	5000L/6500L/8000L	**Down**	40W/50W/60W	
Ø47”	**Up**	8000L/9000L/10500L	**Up**	60W/70W/80W	3000K/3500K/4000K
	Down	8000L/9000L/10500L	**Down**	60W/70W/80W	

- Double-ring Up & downlight, Ø26” Ø35” & Ø47”
- Lumen adjustable by DIP switch
- Multi-CCT adjustable by DIP switch
- Integrated driver located in the canopy



Size



Ligth Distribution

TECHNICAL DETAILS

Input Voltage	120-277 VAC	**IP Rating**	IP40
CRI	90+	**Material**	Aluminum Body / PC Diffuser
Efficiency	130 lm/W	**Life Time**	L80B20 at 50,000 hours
Dimming	0-10V Dimming	**Color**	White Black Custom RAL
Mounting	Suspended Mount (Adjustable 11-ft length cords)		

5 YEAR WARRANTY

Due to the changes of constant improvement in LED technology, all details are subject to change **without notice**. Consult factory for **up to date information**.

03/03/26

LOOP-RD-DI-3R-LED-2

Round LED Suspended Triple Ring Direct/Indirect Light with Multi-lumen/CCT

SIZE

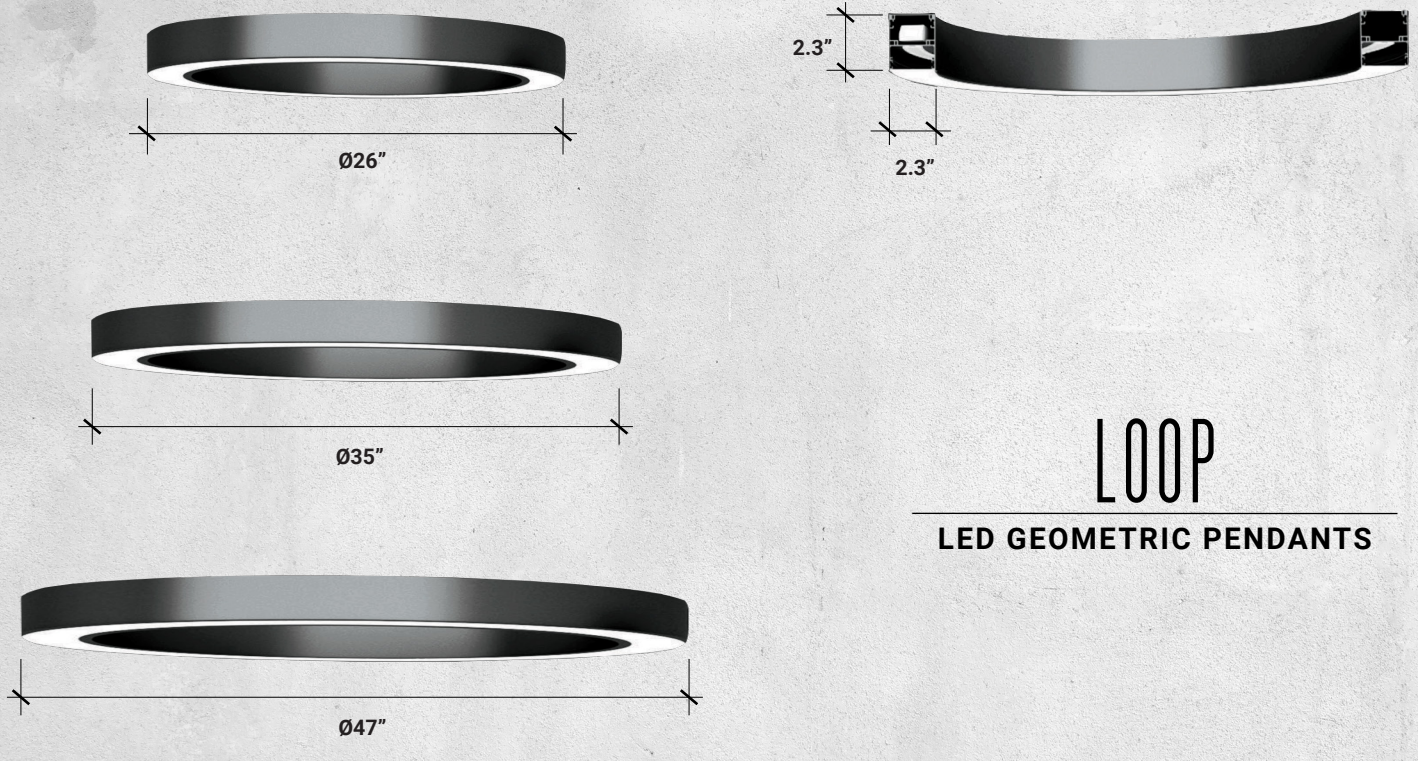

LOOP

LED GEOMETRIC PENDANTS

Easy 3 Colors SELECTOR 3000K • 3500K • 4000K

5 YEARS WARRANTY

Adjustable 11 ft suspension cables provide flexibility to customize ring angles and orientation, and to arrange the sizes from large to small or small to large.

Example: LOOP-RD-DI-3R-LED-2-47-117000-DIM10-MVOLT-30K/35K/40K-90-WH-SM

SERIES	SIZE	LUMENS	DIMMING/VOLTAGE	CCT	CRI	COLOR	EMERGENCY	MOUNTING
LOOP-RD-DI-3R-LED-2	**47** - Ø26”/Ø35”/Ø47”	[1] **117000** - 117000	[2] **DIM10-MVOLT**	**30K/35K/40K -** 3000K-3500K-4000K	**90 -**90+	**WH** -White **BK** -Black **RAL**-Consult factory	[3] REM-EMG-LED-25W-HV-FLEX [3] REM-EMG-LED-15W-HV-FLEX	**SM** - Suspended Mount

1. 117,000 lumens refers to the total combined output (upward and downward) of both rings. For the specific lumen output of each individual ring, please refer to the first page.
2. For more dimming options, please consult factory.
3. Remote emergency option.

Central Canopy Mounting

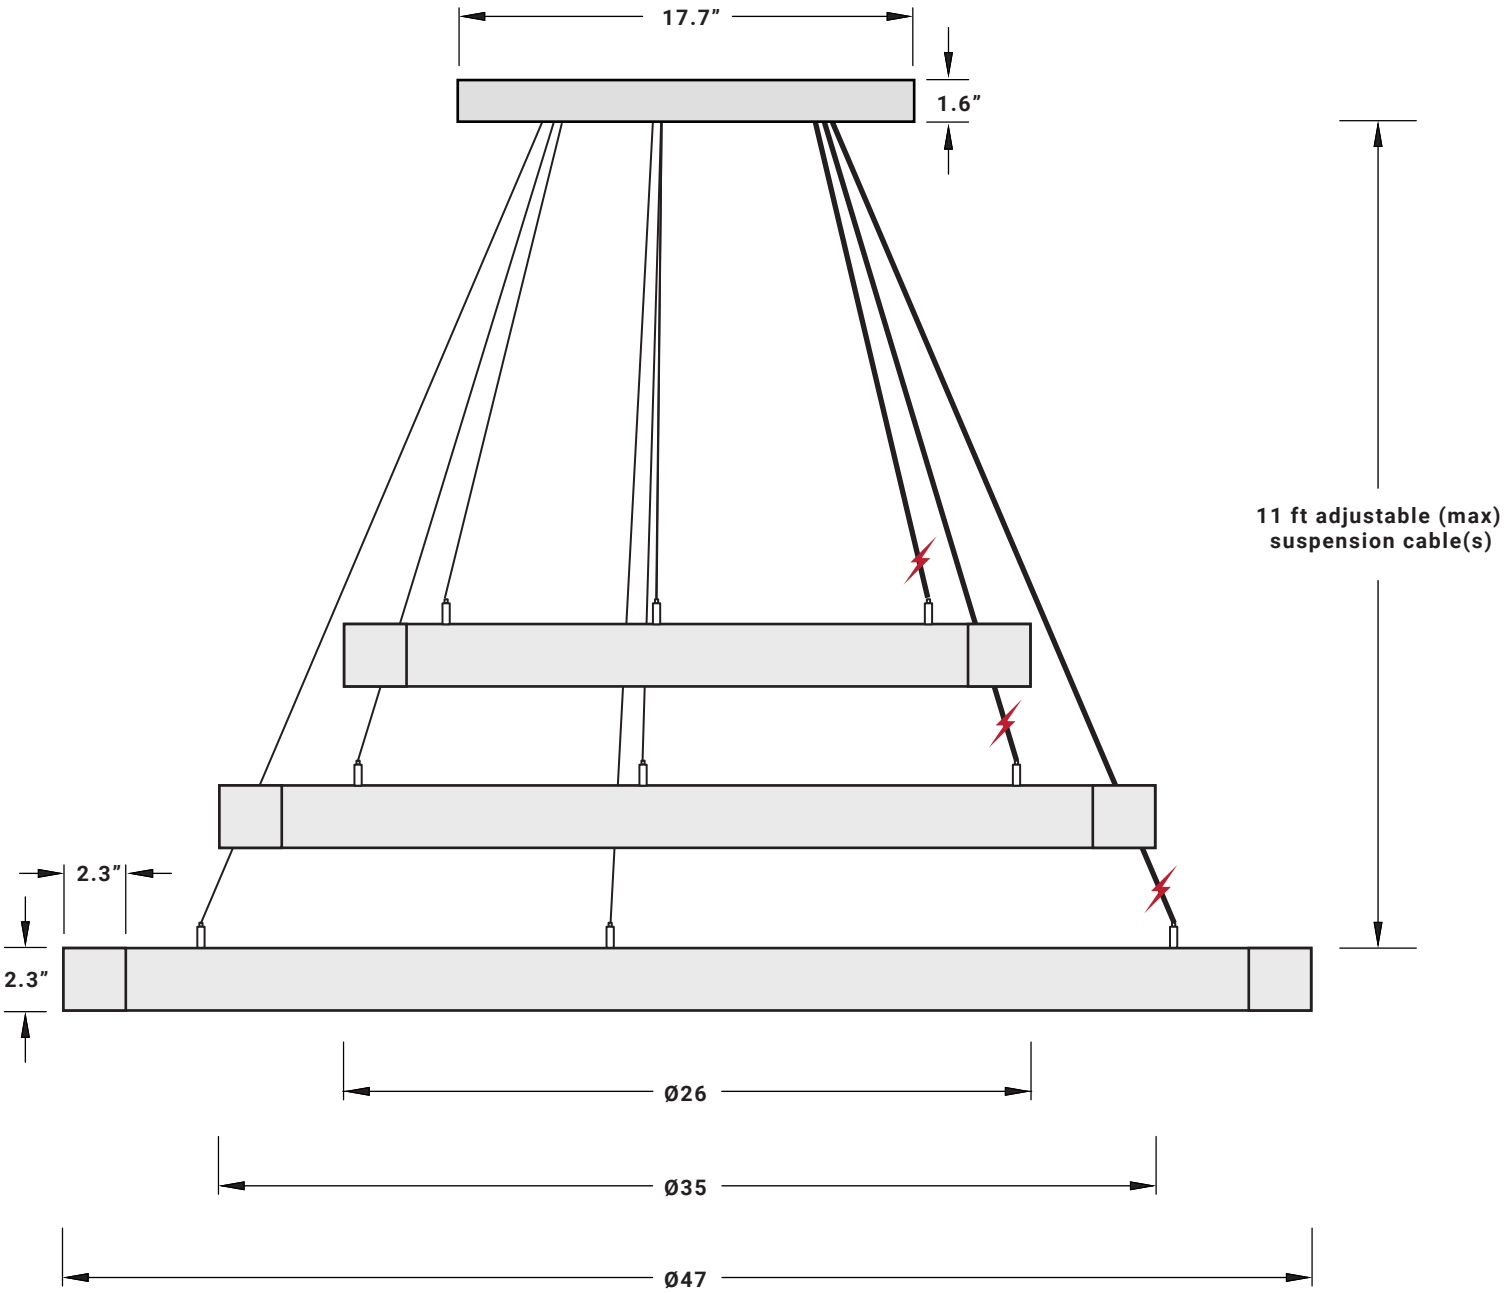

3 Power cables

The drivers, power-adjustable switch, and CCT switch are located inside the canopy. The luminaire comes with 9 suspension cables (11 ft each), 3 power cables, and 1 central canopy.