



The **Moonglow** Acoustic pendant turns open spaces into productive work zones. The pendant is specifically designed to add a decorative element that doubles as a highly effective means of sound management. Ideal for shared workspaces and open-office environments, **Moonglow** provides functional illumination with a high-performance LED light source to illuminate work surfaces.



ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.


ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels

Due to variations in production batches, slight color differences may occur in the acoustic material. While we strive for consistency, exact color matches cannot be guaranteed.

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

Noise Reduction Coefficient (NRC) - 0.75
Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

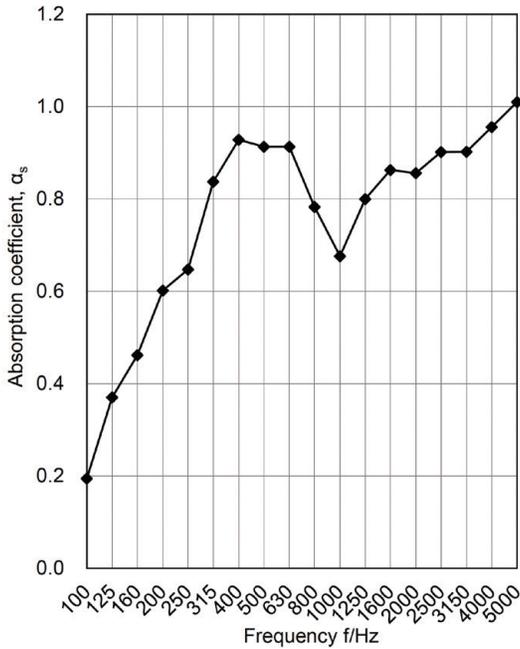

CONSTRUCTION

Built as one continuous, 2" extruded aluminum piece with a matching seamless, flexible PC diffuser lens, this luminaire ensures both ease of installation and a minimalist, elegant charm.

OPTICS & PERFORMANCE

The LOOP Round LED Suspended Direct/Indirect Luminaire is a high-performance lighting solution designed to enhance any space with its sleek design and seamless, uniform glow.

MOUNTING

The fixture includes a central canopy mounting as the standard configuration. For side canopy mounting, field modification is required. The luminaire is supplied with three 11' suspension cables, one central canopy, one wire holder, and one side canopy.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

IP40
L80B20 at 50,000 hours
All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.
cETLus Listed, Suitable for dry locations

MAINTENANCE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

QUALITY CONTROL


Every fixture is rigorously tested by our QC Department before shipping.

LUMEN DETAILS

Based on 4000K, 80+ CRI.
Actual wattage may vary +/- 5%


DIRECT		
LUMINAIRE SIZE	LUMENS	WATTS
Ø 23"	4000	38
Ø 35"	6000	57
Ø 47"	8000	76

Example: **LOOP-RD-DI-RHAPSODY-SOFT-MOONGLOW-MC32-4000L-DIM10-MVOLT-40K-90-WH-SM-GRN**

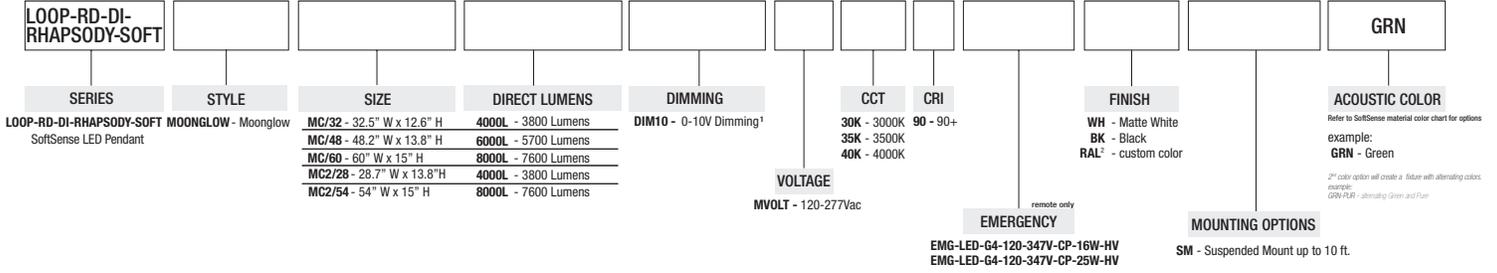

1 For more dimming options, please consult factory
2 Consult factory

DIMENSIONS*

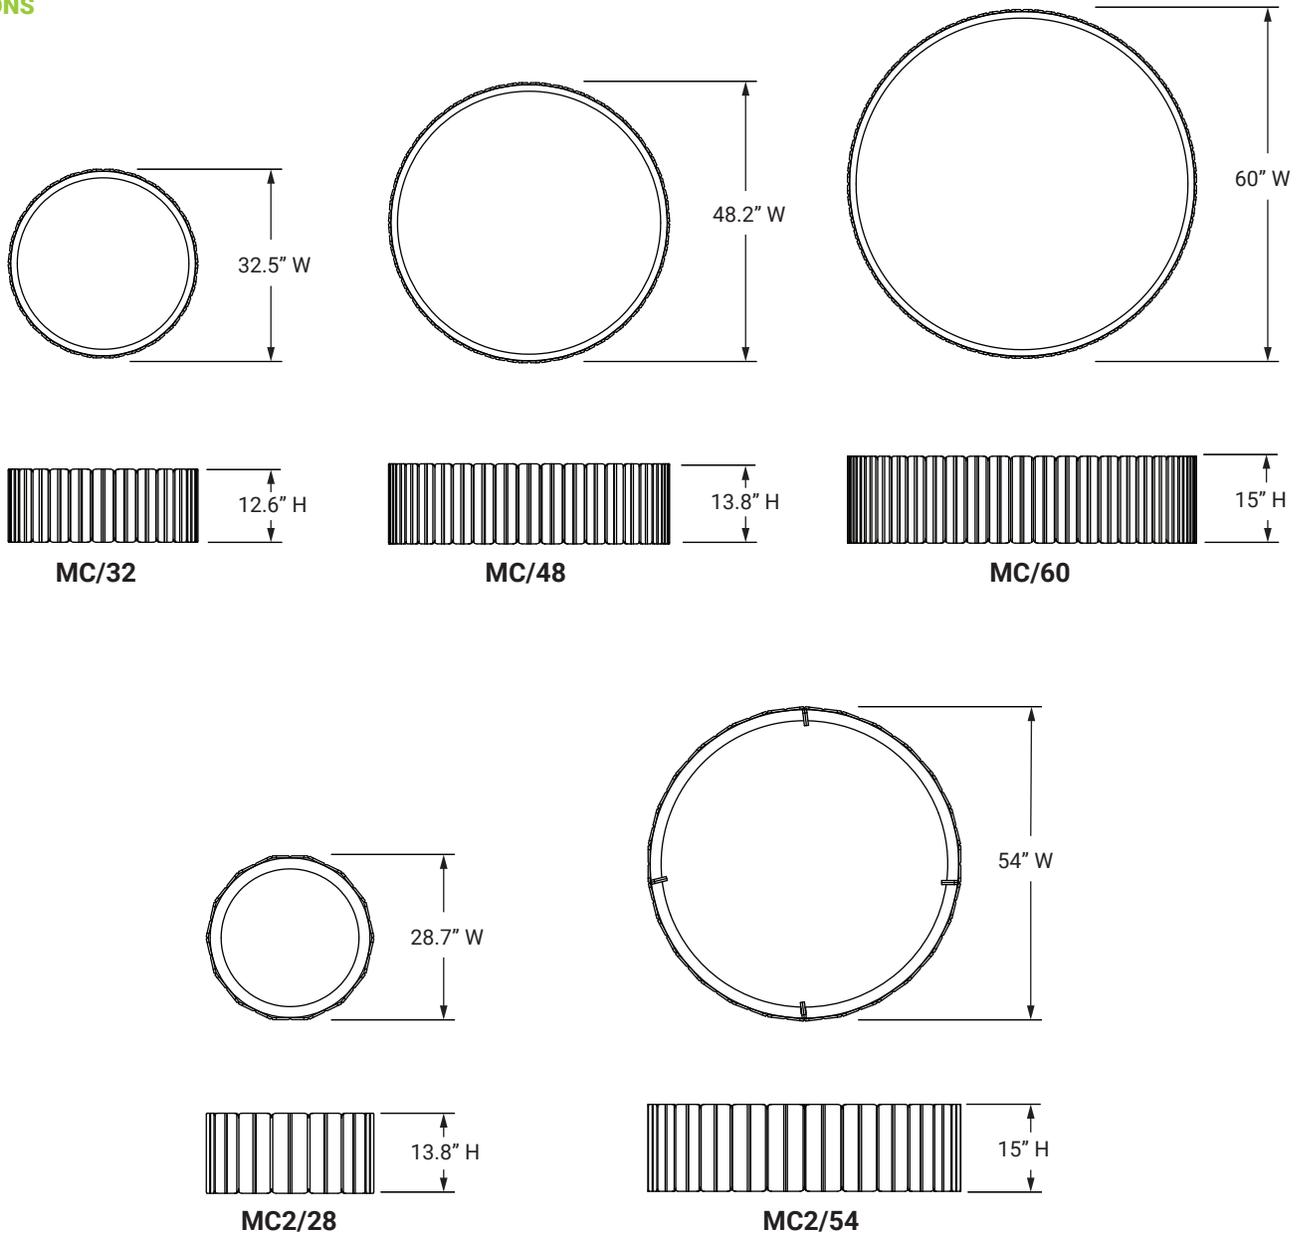


*Dimensions are nominal and may vary by +/- 0.50"


MOUNTING OPTIONS

The fixture comes with a central canopy mounting as standard for all sizes. If side canopy mounting is desired, it must be modified in the field.

CENTRAL CANOPY MOUNTING (2', 3', 4')

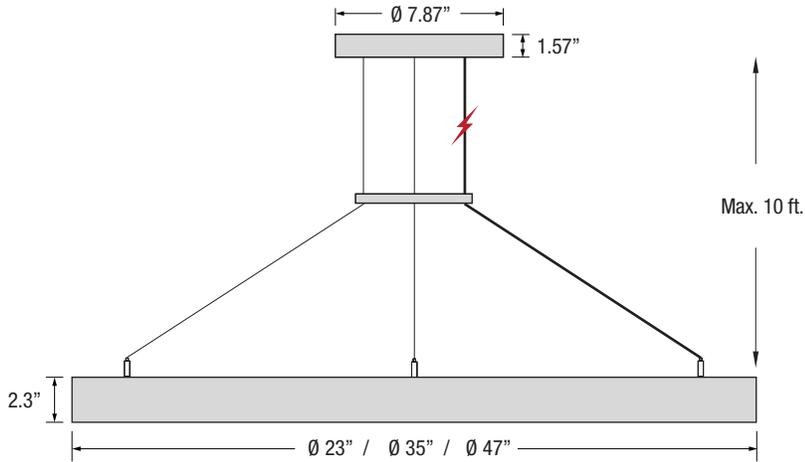

SIDE CANOPY MOUNTING (2', 3', 4')

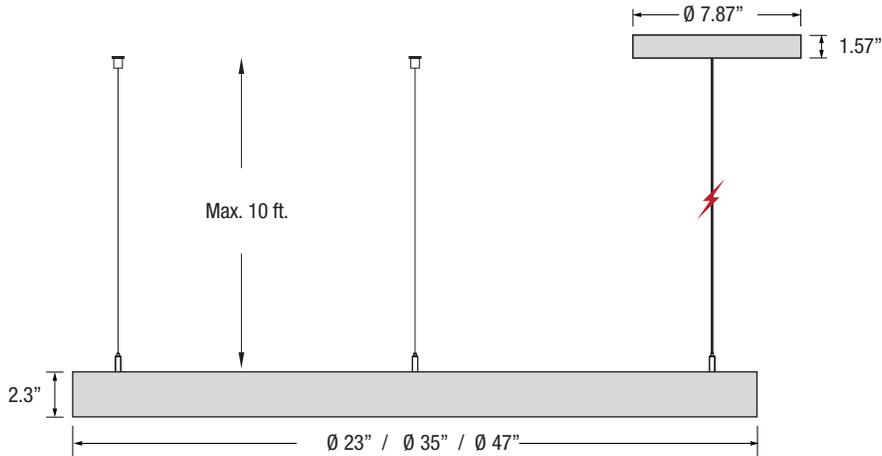

 1 Power cable

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated

PURE PUR	STONE STN	BONE BNE	PEACH PCH
GRAY NOISE NSE	GREIGE GRG	SAND SND	ORANGE ORA
PEBBLE PEB	FOG FOG	DUST DST	BRASS BRS
GRAVEL GRV	WARM GRAY WGR	LATTE LTE	BRONZE BRZ
SHADOW SHD	HIPPO HIP	CLAY CLA	RUST RST
ASPHALT ASP	PERIWINKLE PRW	KELP KLP	PECAN PEC
ABYSS ABS	SKY BLUE SBL	CROCODILE CRC	FIG FIG
NIGHT NIT	SAPPHIRE SAP	SAGE SGE	EGGPLANT EGP
MIDNIGHT MDN	NAVY NVY	PISTACHIO PST	AMETHYST AME
EVERGREEN EVG	SEAWEED SWD	MATCHA MCH	PLUM PLU
MOSS MOS	BAY BAY	OLIVE OLV	CABBAGE CBG
COFFEE CFE	SEA SEA	GREEN GRN	PINK PNK
WINE WIN	DARK TEAL DTL	SUNSHINE SUN	PASSION PAS



Quick ship available for any color depending on order quantity
*All colors are ASTM E84-16 fire rated, select colors are available as Class A