



LUMENS	2000, 2500, 3000, 5000	DIAMETER	26", 33", 45", 69"
CCT & TECHNOLOGIES	3000K / 3500K / 4000K	MOUNTING	Suspended
CRI	90+ Standard	FIXTURE FINISH	WH (White), BK (Black), Custom RAL
COLOR QUALITY	3 Step MacAdam Ellipse	MATERIAL COLORS	Refer to SoftSense Material Color Chart
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10)	LIFETIME	L80B20 at 50,000 Hours
EMERGENCY (REMOTE)	REM-EMG-LED-25W-HV-FLEX / REM-EMG-LED-15W-HV-FLEX	PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM-80 and TM-30, TM-21

The **Rhapsody** family comprises acoustic pendant and suspended luminaires, blending timeless form with contemporary performance. Defined by a clean, classic silhouette, each fixture delivers beautifully balanced illumination while discreetly enhancing acoustic comfort. This harmonious fusion of light and sound makes **Rhapsody** an elegant solution for a wide range of environments, including educational spaces, boardrooms, offices, hospitality settings, lobbies, and restaurants.

**Flora** - A play on the word "flora", which is named after a Roman goddess and the plant life of a specific region. This hoop luminaire with sculpted leaf-inspired structures that softens sound while adding architectural depth. Thoughtfully crafted to enhance both acoustics and aesthetics, bringing refined texture to any modern space.



**ACOUSTIC MATERIAL - 9mm / 0.35" Thickness**

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

**MAINTENANCE**

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.


**ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels**

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75

Weighted Sound Absorption Coefficient -  $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

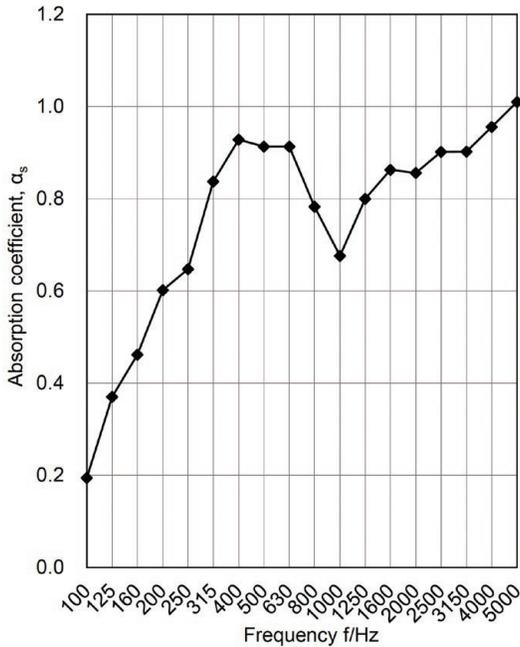

**OPTICS & PERFORMANCE**

The Loop Round Luminaire is a high-performance lighting solution designed to enhance any space with its sleek design and seamless, uniform glow.

**LUMINAIRE CONSTRUCTION**

Built as one continuous, 1.5" extruded aluminum piece with a matching seamless, flexible PC diffuser lens, and acoustic panels this luminaire ensures both ease of installation and a minimalist, elegant charm.

Available in four different sizes each with its own lumen output, for a variety of design options. The internal driver and adjustable CCT switch inside the canopy allow for versatile color temperature transitions during maintenance or installation, creating an ambiance of refined elegance and technical excellence that complements any modern setting.

The aluminum ring is available in classic black or white finishes or custom RAL colors to seamlessly complement any interior style. Ideal for transforming office, commercial, lobby, and hospitality lighting into an artful experience.

**MOUNTING**

Suspended Mount. With two suspended mounting options (Central Canopy Mounting and Side Canopy Mounting) the adjustable 11 ft cables and canopy are engineered to accommodate different ceiling types, ceiling angles and mounting heights, and is adaptable to a variety of spaces with a minimum suspension of 6" from the ceiling to the top of the fixture.

For added convenience, the canopy can be directly mounted to a 4" octagonal or 4S 4" square junction box, facilitating below ceiling access for easy installation, maintenance, and servicing.

**DIMMING & DRIVER INFORMATION**

DIM10-MVOLT - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277V.

**WARRANTY**

Limited five-year warranty.

**LISTINGS**

cETLus Listed. Suitable for Dry Locations only.  
IP40  
L80B20: 50,000 hours

**LUMEN DISTRIBUTION**

CCT switch located inside the canopy

**LUMEN DETAILS**

Based on 4000K, 80+ CRI.  
Actual wattage may vary +/- 5%


DIRECT		
LUMINAIRE SIZE	LUMENS	WATTS
Ø 26"	2000	38
Ø 33"	2500	57
Ø 45"	3000	76
Ø 69"	5000	125

Example: LOOP-RD-OT-LED-RAPSODY-SOFT-FLOURA-26-2000L-DIM10-MVOLT-30K/35K/40K-90-WH-SM-NVY


SERIES	LUMINAIRE SIZE	LUMENS	DIMMING/VOLTAGE	CRI	COLOR	MOUNTING	ACOUSTIC COLOR
LOOP-RD-OT-LED-RAPSODY-SOFT-FLOURA	26 - Ø 26.7"	2000L - 1800L	DIM10-MVOLT <sup>1</sup>	90 -90+	WH - White	SM - Suspended Mount <sup>3</sup>	example: GRN - Green
	33 - Ø 33"	2500L - 2280L			BK - Black		
	45 - Ø 45.6"	3000L - 3180L			RAL- Consult factory		
	69 - Ø 69.2"	5000L - 4800L					
				CCT	EMERGENCY		
				30K/35K/40K - 3000K-3500K-4000K			
				REM-EMG-LED-25W-HV-FLEX <sup>2</sup>			
				REM-EMG-LED-15W-HV-FLEX <sup>2</sup>			

- 1. For more dimming options, please consult factory.
- 2. Remote emergency option.
- 3. The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is desired, it must be modified in the field.

LUMINAIRE SIZES

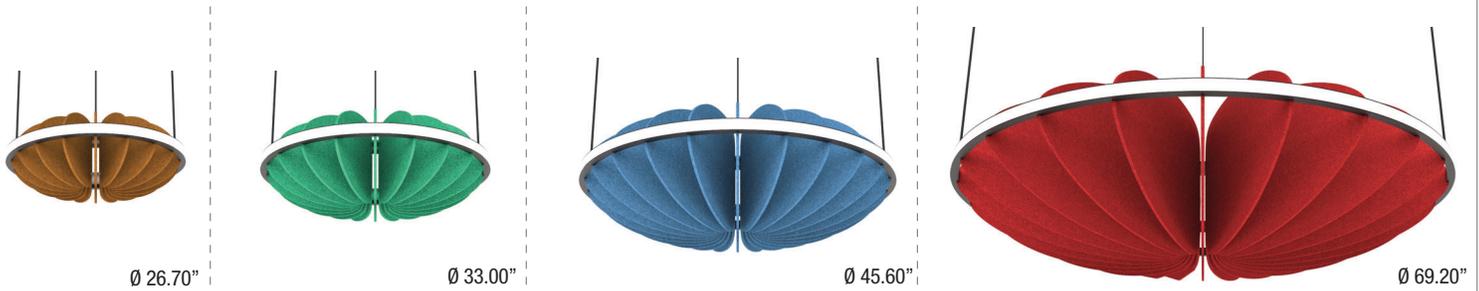

DIMENSIONS\*

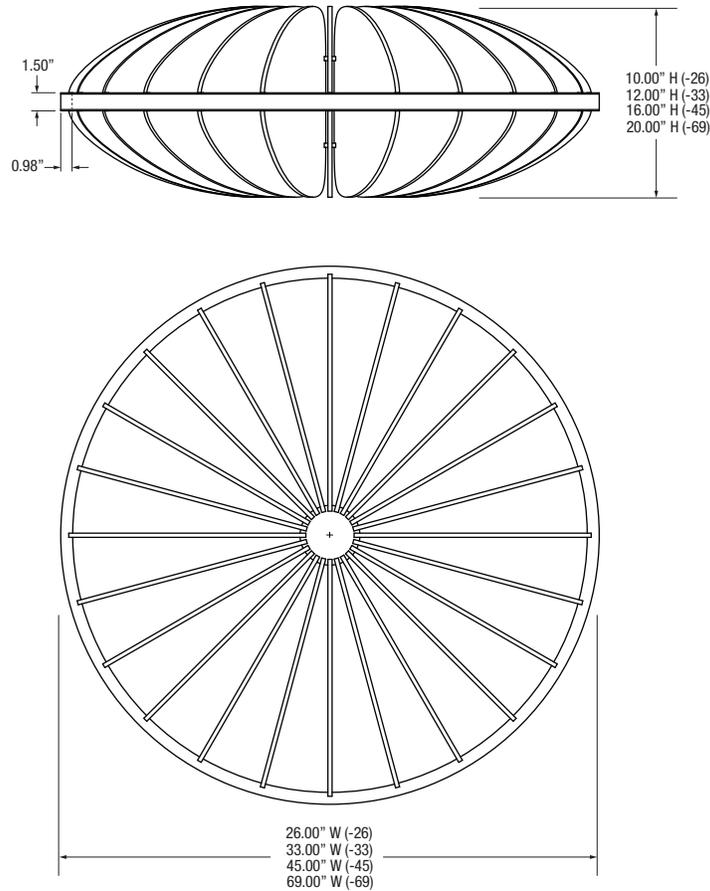


\*Dimensions are nominal and may vary by +/- 0.50"

**MOUNTING OPTIONS**

The fixture comes with a central canopy mounting as standard for all sizes. If side canopy mounting is desired, it must be modified in the field.

**26", 33", 45" LUMINAIRE \***

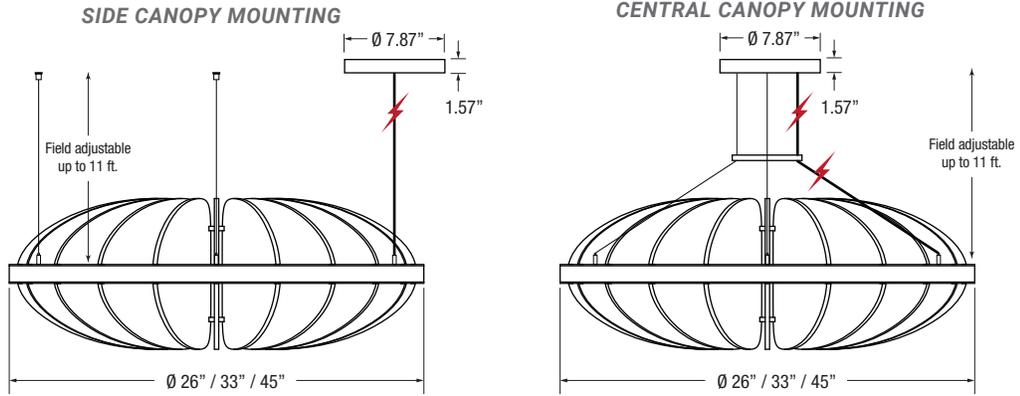


⚡ 1 Power cable


\* The driver and CCT switch are located inside the canopy. The luminaire comes with 3 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

**69" LUMINAIRE \*\***

**SIDE CANOPY MOUNTING**

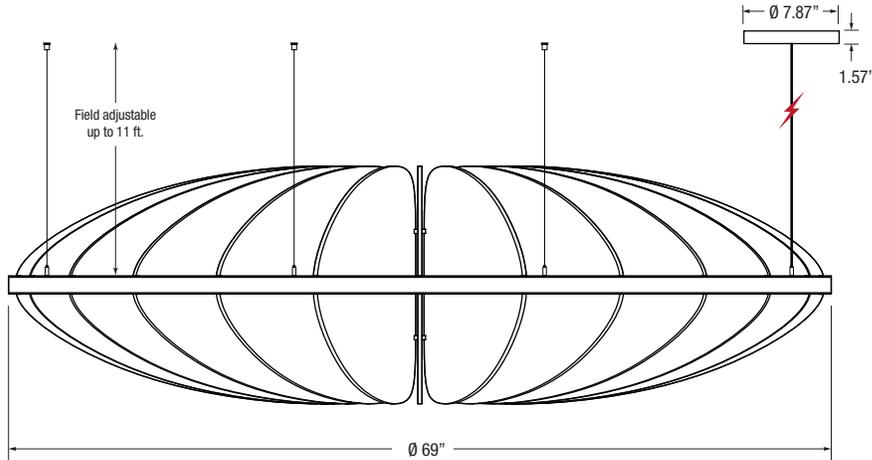

**CENTRAL CANOPY MOUNTING**

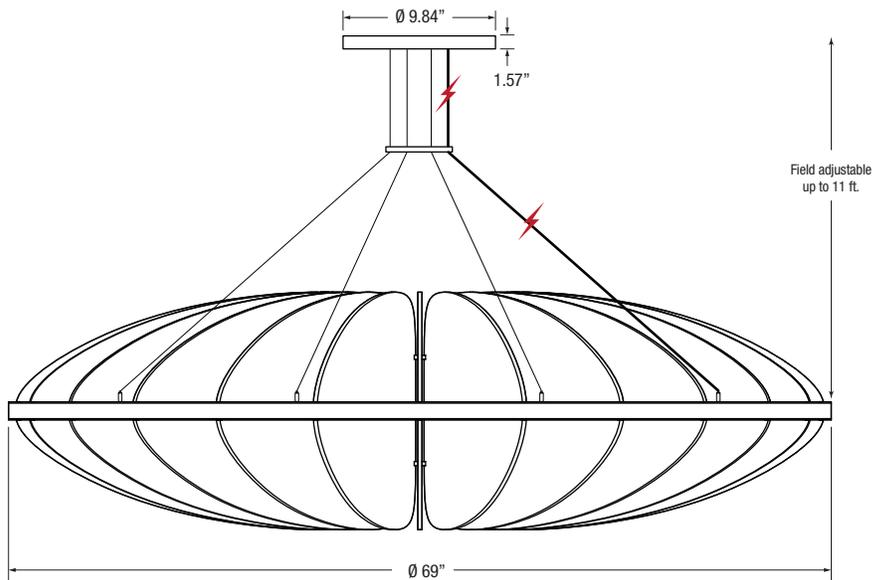

⚡ 1 Power cable

\*\* The driver and CCT switch are located inside the canopy. The luminaire comes with 3 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

\*\* For Ø69" option, there is no switch to adjust the wattage percentage for the up / down lights. Each light uses a separate driver and must be powered on distinct circuits, allowing for independent control.

**STANDARD COLORS**

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated

<b>PURE</b> PUR	<b>STONE</b> STN	<b>BONE</b> BNE	<b>PEACH</b> PCH
<b>GRAY NOISE</b> NSE	<b>GREIGE</b> GRG	<b>SAND</b> SND	<b>ORANGE</b> ORA
<b>PEBBLE</b> PEB	<b>FOG</b> FOG	<b>DUST</b> DST	<b>BRASS</b> BRS
<b>GRAVEL</b> GRV	<b>WARM GRAY</b> WGR	<b>LATTE</b> LTE	<b>BRONZE</b> BRZ
<b>SHADOW</b> SHD	<b>HIPPO</b> HIP	<b>CLAY</b> CLA	<b>RUST</b> RST
<b>ASPHALT</b> ASP	<b>PERIWINKLE</b> PRW	<b>KELP</b> KLP	<b>PECAN</b> PEC
<b>ABYSS</b> ABS	<b>SKY BLUE</b> SBL	<b>CROCODILE</b> CRC	<b>FIG</b> FIG
<b>NIGHT</b> NIT	<b>SAPPHIRE</b> SAP	<b>SAGE</b> SGE	<b>EGGPLANT</b> EGP
<b>MIDNIGHT</b> MDN	<b>NAVY</b> NVY	<b>PISTACHIO</b> PST	<b>AMETHYST</b> AME
<b>EVERGREEN</b> EVG	<b>SEAWEED</b> SWD	<b>MATCHA</b> MCH	<b>PLUM</b> PLU
<b>MOSS</b> MOS	<b>BAY</b> BAY	<b>OLIVE</b> OLV	<b>CABBAGE</b> CBG
<b>COFFEE</b> CFE	<b>SEA</b> SEA	<b>GREEN</b> GRN	<b>PINK</b> PNK
<b>WINE</b> WIN	<b>DARK TEAL</b> DTL	<b>SUNSHINE</b> SUN	<b>PASSION</b> PAS



quick ship available for any color depending on order quantity  
\*all colors are ASTM E84-16 fire rated, select colors are available as Class A