



LUMENS	4000, 6000, 8000
CCT & TECHNOLOGIES	3000K / 3500K / 4000K
CRI	90+ Standard
COLOR QUALITY	3 Step MacAdam Ellipse
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10)
EMERGENCY (REMOTE)	EMG-LED-G4-120-347V-CP-16W-HV EMG-LED-G4-120-347V-CP-25W-HV

LUMINAIRE SIZES	2' (23"x 23"), 3' (35"x 35"), 4' (47"x 47")
MOUNTING	Suspended
FIXTURE FINISH	WH (White), BK (Black), Custom RAL
MATERIAL COLORS	Refer to SoftSense Material Color Chart
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM-80 and TM-30, TM-21

"Rhapsody" family consists of acoustic pendant or suspended fixtures. The luminaire's simple, classic look provides light over any environment and the added acoustic feature makes it suitable for any design application such as schools, boardrooms, office areas, hotels, lobbies, restaurants, etc.

STEM - An acoustic shroud surrounding the luminaire with a sculptural structure that softens sound while adding architectural depth. Thoughtfully crafted to enhance both acoustics and aesthetics, bringing refined texture to any modern space.



07.06.26

OPTICS & PERFORMANCE

The LOOP Square LED Suspended Direct/Indirect Luminaire is a high-performance lighting solution designed to enhance any space with its sleek design and seamless, uniform glow.

LUMINAIRE CONSTRUCTION

Built as one continuous, 4" extruded aluminum piece with a matching seamless, flexible PC diffuser lens, this luminaire ensures both ease of installation and a minimalist, elegant charm.

MOUNTING / SUSPENSION

The fixture includes a central canopy mounting as the standard configuration. For side canopy mounting, field modification is required. The luminaire is supplied with four 11' suspension cables, one central canopy, one wire holder, and one side canopy.

WARRANTY

Limited five-year warranty.

LISTINGS

IP40
L80B20 at 50,000 hours
All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

MAINTENANCE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

NOTICE

The acoustic material surrounding the luminaire may obstruct the intended light distribution.

ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Due to variations in production batches, slight color differences may occur in the acoustic material. While we strive for consistency, exact color matches cannot be guaranteed.

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.


ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75


Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

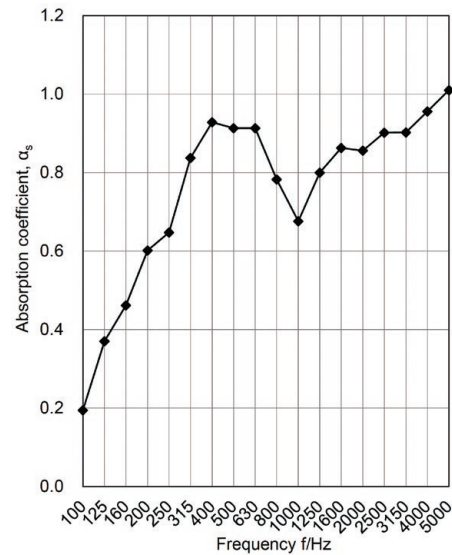

LUMEN DISTRIBUTION

CCT switch located inside the canopy

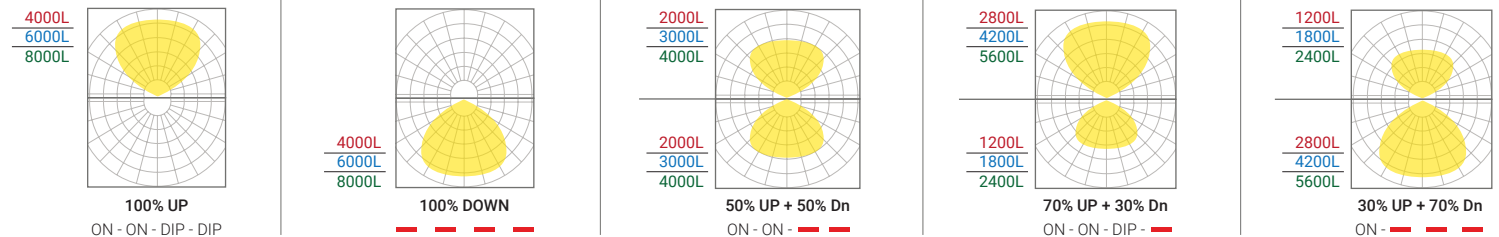

LUMEN DETAILS

Based on 4000K, 90+ CRI.
Actual wattage may vary +/- 5%


DIRECT		
LUMINAIRE SIZE	LUMENS	WATTS
23" x 23"	4000	40
35" x 35"	6000	60
47" x 47"	8000	80

Example: **LOOP-SQ-DI-RHAPSODY-SOFT-STEM-14IN-35x35-6000L-DIM10-MVOLT-30K/35K/40K-90-BK-SM-GRN**

LOOP-SQ-DI-RHAPSODY-SOFT												
SERIES	STYLE	HEIGHT	LUMINAIRE SIZE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	FINISH	MOUNTING OPTION	COLOR
LOOP-SQ-DI-RHAPSODY-SOFT SoftSense LED Suspended Ring Series	STEM - Stem	8IN - 8 inches 14IN - 14 inches	23x23 - 23"x 23" 35x35 - 35"x 35" 47x47 - 47"x 47"	4000L - 4000 Lumens 6000L - 6000 Lumens 8000L - 8000 Lumens	DIM10 - 0-10V Dimming	1 MVOLT - 120-277Vac	30K/35K/40K - 3000K/3500K/4000K	90 - 90+	EMG-LED-64-120-347V-CP-16W-HV EMG-LED-64-120-347V-CP-25W-HV	WH - White BK - Black RAL - custom color ¹	SM - Suspended up to 11 ft. consult factory for other sizes	refer to SoftSense material color chart for options example: GRN - Green

¹ Consult factory for other options

DIMENSIONS

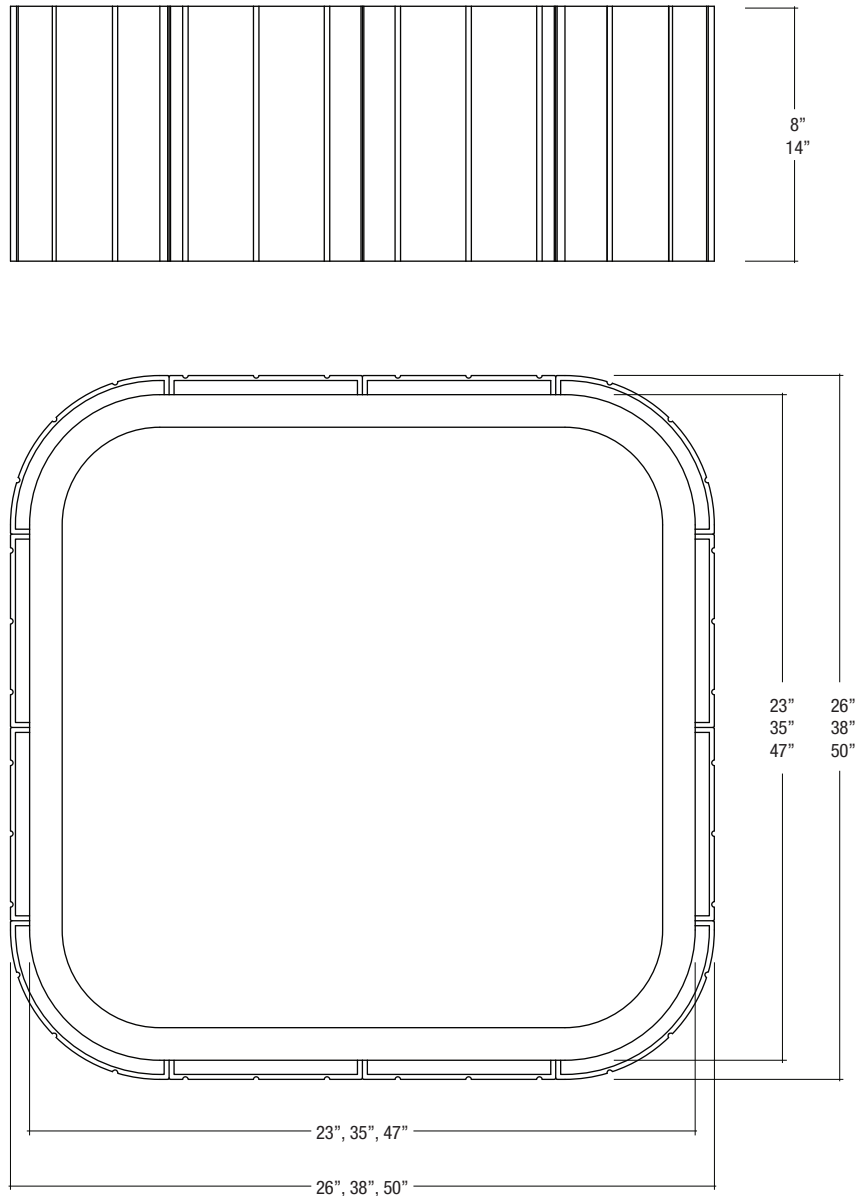


LOOP-SQ-DI-RHAPSODY-SOFT-FLAT-25X25-32IN-112

07.06.26

MOUNTING OPTIONS


The fixture comes with a central canopy mounting as standard for all sizes. If side canopy mounting is desired, it must be modified in the field.

SIDE CANOPY MOUNTING

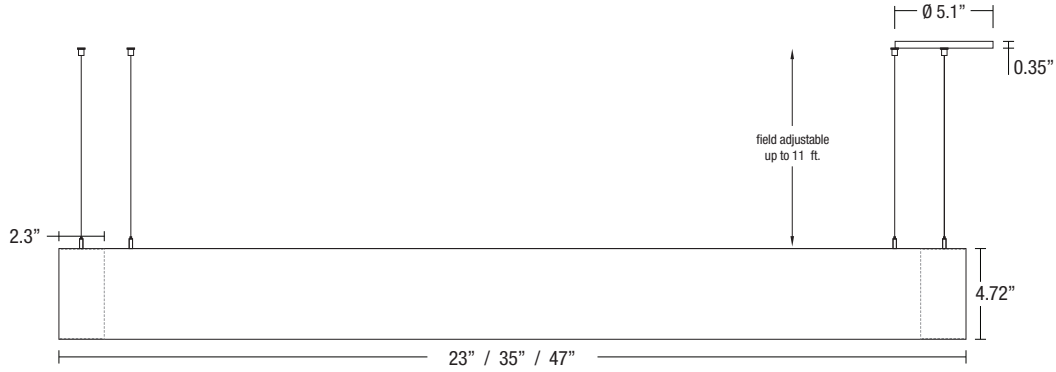

The driver and CCT switch are located inside the profile. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

CENTRAL CANOPY MOUNTING

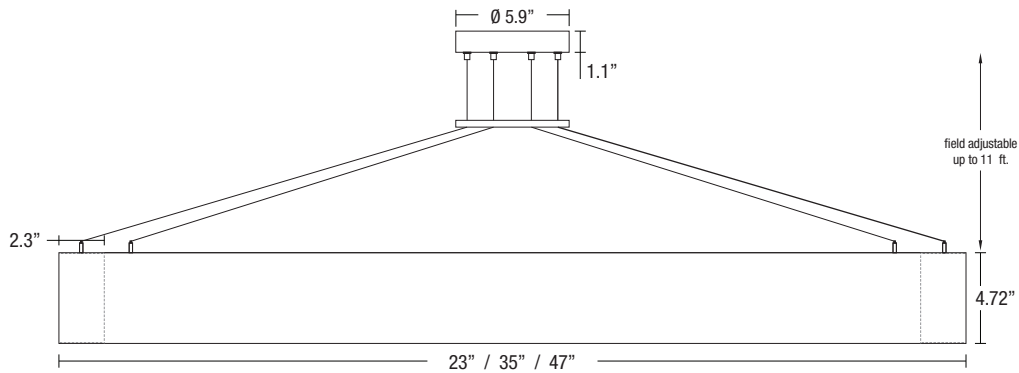

The driver and CCT switch are located inside the profile. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)



All panels ASTM E84-16 Fire Rated

STANDARD PRINTS

Panel Thickness: 8.5 mm / 0.34" (+/- 0.5 mm)



prints shown at 12% scale

Declare. Label Pending



quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A