



LUMENS	4000L, 6000L, 7000L	DIMENSIONS	(S) 23.6" x 25.7", (M) 34.6" x 37.7", (L) 45.7" x 50"
CCT & TECHNOLOGIES	3000K, 3500K, 4000K	HEIGHT	14", 16", 18"
COLOR QUALITY	3 Step MacAdam Ellipse	FIXTURE FINISH	BK (Black), WH (Matt White), SI (Silver), Custom RAL
MOUNTING	Pendant, Suspended	MATERIAL COLORS	Refer to SoftSense Material Color Chart
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10) LUTH, DIMTR	PHOTOMETRIC TESTS	In Accordance with IES LM79-08 and LM-80, and TM-30

The **Rhapsody** family comprises acoustic pendant and suspended luminaires, blending timeless form with contemporary performance. Defined by a clean, classic silhouette, each fixture delivers beautifully balanced illumination while discreetly enhancing acoustic comfort. This harmonious fusion of light and sound makes **Rhapsody** an elegant solution for a wide range of environments, including educational spaces, boardrooms, offices, hospitality settings, lobbies, and restaurants.

The **Triangle** features an acoustic shroud surrounding the luminaire with a sculptural structure that softens sound while adding architectural depth. Thoughtfully crafted to enhance both acoustics and aesthetics, bringing refined texture to any modern space.



02.10.26

ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.


ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75

Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

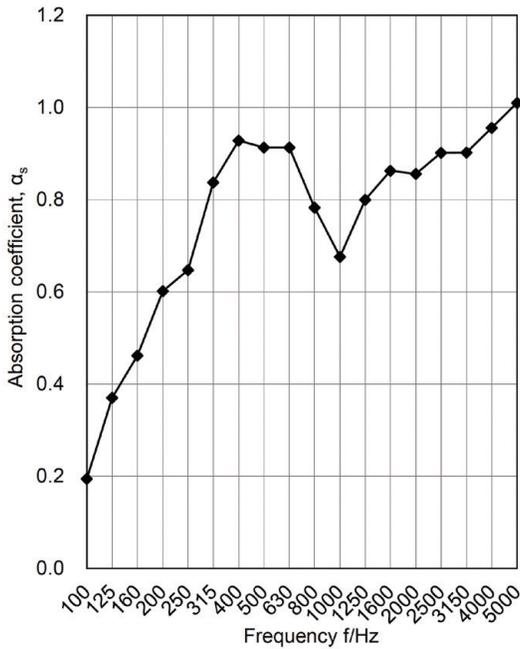

CONSTRUCTION

PET material wrapped around rigid steel design that ensures longevity and endurance. A high quality, high transmission PMMA glare free lens offers smooth illumination.

OPTICS & PERFORMANCE

The light engines found in the LOOP-LED-Rhapsody are rated at 85+ CRI and are available in multiple CCTs: 3000K, 3500K, and 4000K. Rated and tested to LM-79, LM-80, and TM-30 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. OPR-LED-Rhapsody comes standard with 0-10V dimming on either 120V-277V. For 347V, please consult factory. Consult factory for dimmer compatibility.

DIMMING

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

DIMTR - Triac & Electronic low voltage dimming. Available in 120V.

LUTH - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

MOUNTING

Comes standard in adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings. Available in pendant, central canopy, and side canopy mountings

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

c-UL-us - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

UL Listed for Damp location

QUALITY CONTROL

Every fixture is rigorously tested by our QC Department before shipping.

MAINTENANCE


Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

OPTIONS

Available without light source.

LUMEN DISTRIBUTION

CCT switch located inside the profile

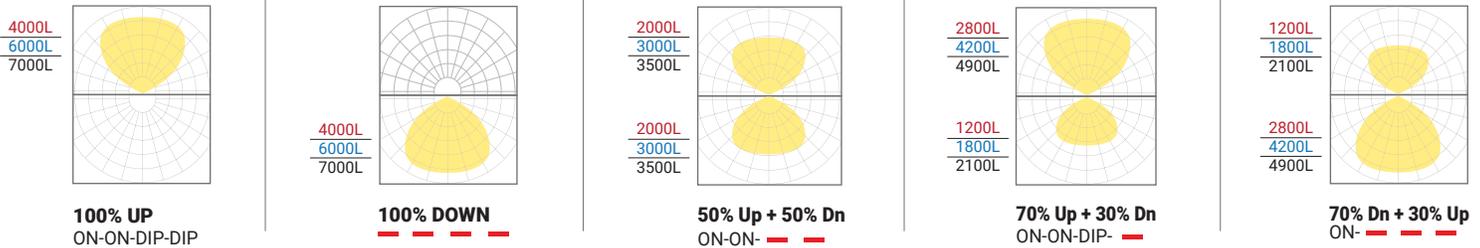

For the **100% UP** and **100% DownLight** options, the lumen output will remain the same whether the light is directed **downward** or **upward**.

LUMEN DETAILS

Based on 4000K, 90+ CRI.


Actual wattage may vary +/- 5%

LUMINAIRE SIZE	DIRECT	
	LUMENS	WATTS
23.6" x 21.6"	4000	37
35.4" x 32.7"	6000	55
47.2" x 43.3"	7000	73

Example: **LOOP-TRI-RHAPSODY-SOFT-TRIANGLE-23IN-4000L-DIM10-MVOLT-40K-85-WH-SM-GRN**



LOOP-TRI-RHAPSODY-SOFT												GRN
SERIES	STYLE	SIZE	DIRECT LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	FINISH	MOUNTING OPTION	COLOR	
LOOP-TRI-RHAPSODY-SOFT SoftSense LED Pendant	TRIANGLE - Triangle	23IN - 23.6" L x 25.7" W 34IN - 34.6" L x 37.7" W 45IN - 45.7" L x 50" W	4000L - 4000 Lumens NLS ² - no light source 6000L - 6000 Lumens NLS ² - no light source 7000L - 7000 Lumens NLS ² - no light source	DIM10 - 0-10V Dimming	120 277 MVOLT	30K - 3000K 35K - 3500K 40K - 4000K	85 90+	0-EMG-LED-25W (EMG and test switch would be ceiling install)	WH - Matte White BK - Black SI - Silver RAL ¹ - custom color	SCM10 - Side Canopy Mount up to 10 ft. SCM20 - Side Canopy Mount up to 20 ft. CCM10 - Central Canopy Mount up to 10 ft. CCM20 - Central Canopy Mount up to 20 ft.	Refer to SoftSense material color chart for options example: GRN - Green	
<p>¹ Consult Factory ² No Light Source, please skip to "Mounting Option"</p> <p>CUS¹ - custom¹ NLS² - no light source</p>												

DIMENSIONS


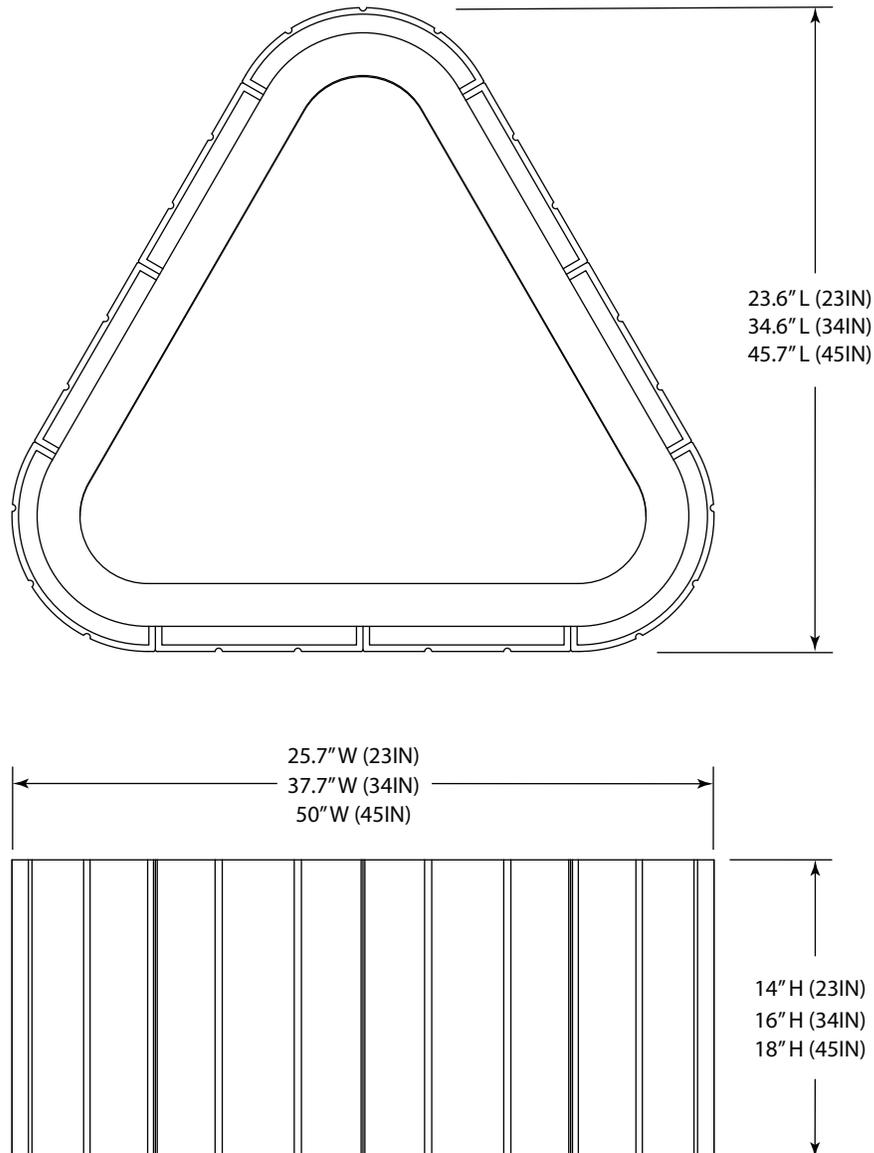


MOUNTING OPTIONS



The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is desired, it must be modified in the field.

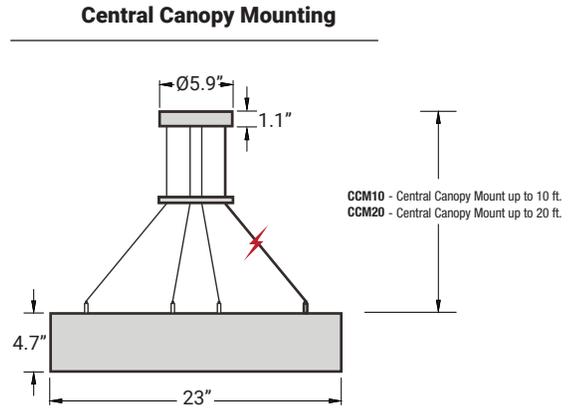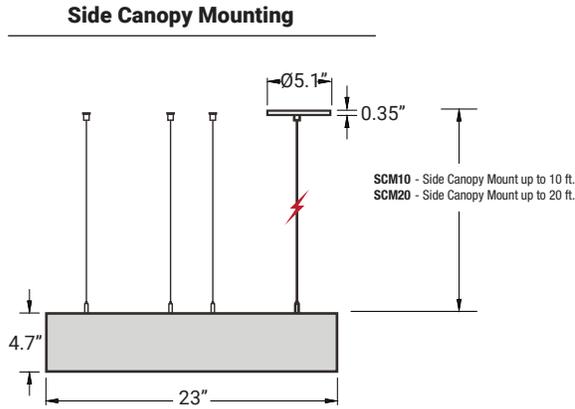

The driver and CCT switch are located inside the profile. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

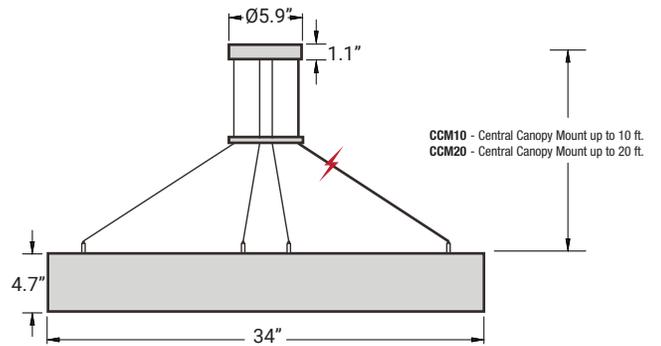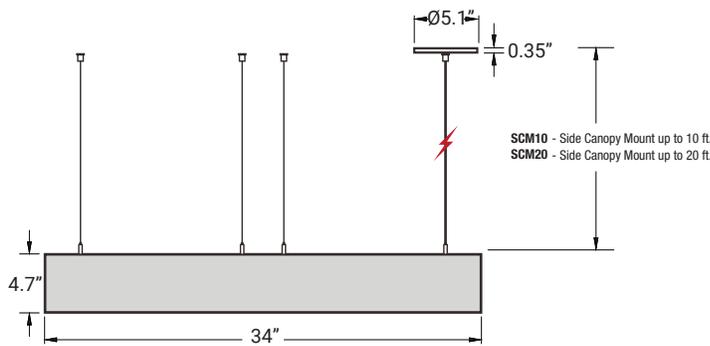

The driver and CCT switch are located inside the profile. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

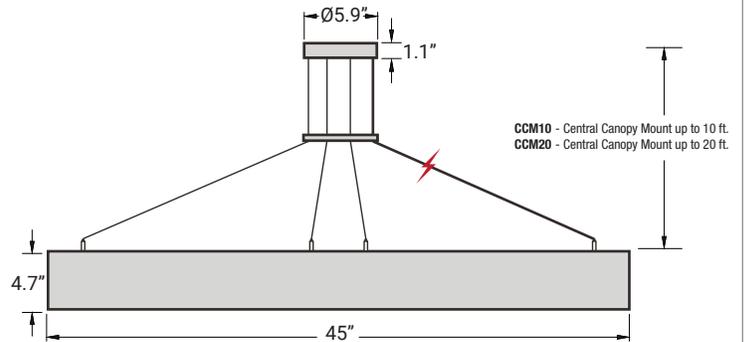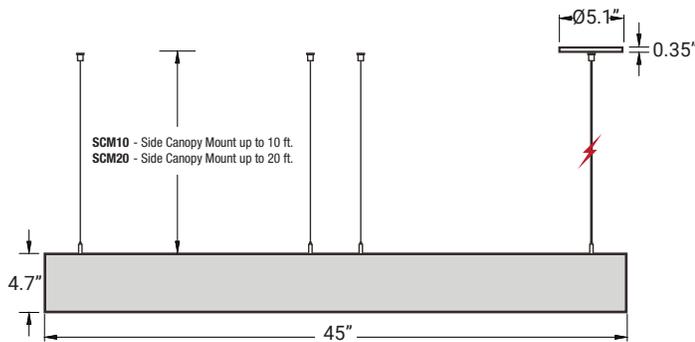

The driver and CCT switch are located inside the profile. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

The driver and CCT switch are located inside the profile. The luminaire comes with 3 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

1 Power cable

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated

PURE PUR	STONE STN	BONE BNE	PEACH PCH
GRAY NOISE NSE	GREIGE GRG	SAND SND	ORANGE ORA
PEBBLE PEB	FOG FOG	DUST DST	BRASS BRS
GRAVEL GRV	WARM GRAY WGR	LATTE LTE	BRONZE BRZ
SHADOW SHD	HIPPO HIP	CLAY CLA	RUST RST
ASPHALT ASP	PERIWINKLE PRW	KELP KLP	PECAN PEC
ABYSS ABS	SKY BLUE SBL	CROCODILE CRC	FIG FIG
NIGHT NIT	SAPPHIRE SAP	SAGE SGE	EGGPLANT EGP
MIDNIGHT MDN	NAVY NVY	PISTACHIO PST	AMETHYST AME
EVERGREEN EVG	SEAWEED SWD	MATCHA MCH	PLUM PLU
MOSS MOS	BAY BAY	OLIVE OLV	CABBAGE CBG
COFFEE CFE	SEA SEA	GREEN GRN	PINK PNK
WINE WIN	DARK TEAL DTL	SUNSHINE SUN	PASSION PAS



quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A