

Specifications of Mini Round Instant Flexilight:

Structure	Voltage	Max. Loading Length (Color)	Cutting Unit (Color)	Bulb Spec.	Number of Bulbs/Unit	Wattage
	12V	30'	4"	3.0V 0.07A 0.21W	12	2.52W/foot
	24V	60'	8"	3.0V 0.07A 0.21W	12	2.52W/foot
	110-120V	150'	24"	6.5V 0.07A 0.46W	12	5.5W/foot


Packages Available

Item Number	Length	Package	ERMF - 120 - 150 - COLOR
			Item No. Voltage Length Specify color
ERMF-120-150	150'	/Roll	(Available in 150' Rolls only, no custom cut)
ERMF-24-150*	150'	/Roll	
ERMF-12-150**	150'	/Roll	

NOTE: EACH ROLL INCLUDES; 3pcs ERM1XXX Power Cords, 3pcs M3 Splice Connectors, 3pcs M4 End Caps

Mini Round Instant Flexilight Accessories:

- ERM1-120V Mini Round Flexilight 6ft. Power Cord w/ Power Connector
- ERM1-24V* Mini Round Flexilight 6ft. Power Cord w/ Power Connector
- ERM1-12V** Mini Round Flexilight 6ft. Power Cord w/ Power Connector
- M3 Mini Round Flexilight Splice Connector
- M4 Mini Round Flexilight End Caps
- M5 Mini Round Flexilight Tie Strap
- M6 Mini Round Flexilight Mounting Clips
- M7 Mini Round Flexilight Suction Cup
- M8 Mini Round Flexilight 6ft. Channel
- M9 Mini Round Flexilight Easy Splice Connector
- M10 Mini Round Flexilight Y-cord
- M11 Mini Round Flexilight T-connector
- M14 Housing Clamp for Splice Connector
- M103 Mini Round Flexilight PVC Connector
- M22 Mini Round Flexilight PVC T-Connector
- M23 Mini Round Flexilight PVC X-Connector

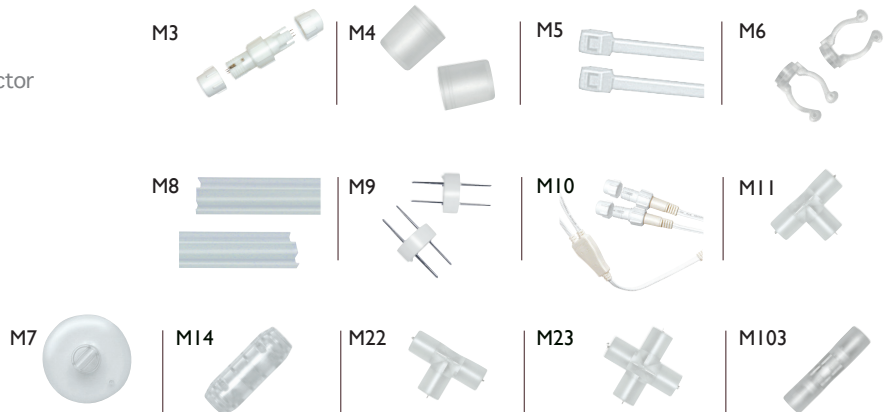

Standard Controller

MODEL	VOLTAGE AVAILABLE	MAX. LENGTH	FUNCTIONS
ERWL-2C-M-110	120V	150 FT.	Static/Flashing
ERWL-2C-M-24A*	24V	60 FT.	Static/Flashing
(*Requires 24V AC power source)			
ERWL-2C-M-12A**	12V	30 FT.	Static/Flashing
(**Requires 12V AC power source)			



Due to the changes of constant improvement in lighting technology, all details are subject to change without notice. Consult factory for up to date information.