


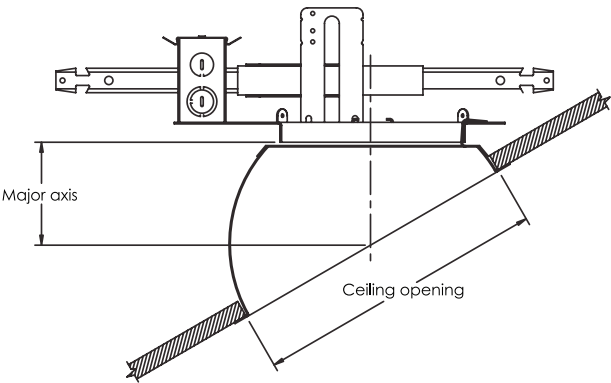

FEATURES

- The Sloped Ceiling Adapter provides an effective and attractive interface between sloped ceilings and Maxilume Architectural downlighting.
- Each adapter is scaled specifically to the aperture diameter of the luminaire.
- The adapter may be specified for 10 – 30 degree slopes, in 5 degree increments.
- The self-flanged, heavy gauge aluminum adapter is coated with a white, textured polyester powder finish for durability.
- Mechanical design provides simplified installation with integral tabs.
- Integral tabs support the adapter within the recessed downlight housing prior to installation of the optics.

ORDERING INFORMATION: (Please check the boxes below for the option desired)

SERIES	FIXTURE	DEGREE OF SLOPE
MSCA	☐ HH6-LED	☐ 10D
	☐ HH8-LED	☐ 15D
		☐ 20D
		☐ 25D
		☐ 30D

Example:

MSCA - 6 -10D

SLOPED CEILING ADAPTER ORDERING INFORMATION AND DIMENSIONAL DATA						
SLOPED CEILING ADAPTER	CEILING OPENING (DIA.)	DEGREE OF SLOPE (PITCH)				
		10° (2/12)	15° (3/12)	20° (4&5/12)	25° (6/12)	30° (7/12)
		MAJOR AXIS HEIGHT ADDER				
MSCA6	11 (27.9CM)	3-7/8 (9.8CM)	3-7/8 (9.8CM)	3-7/8 (9.8CM)	3-7/8 (9.8CM)	3-7/8 (9.8CM)
MSCA8	12-5/8 (32.1CM)	4-1/4 (10.8CM)	4-1/4 (10.8CM)	4-1/4 (10.8CM)	4-1/4 (10.8CM)	4-1/4 (10.8CM)

1 INCH ARCHITECTURAL SLOPE CEILING ADAPTER