


**MOUNTING**

- Standard versatile mounting arm accommodates multiple drilling patterns as well as square and round poles
- Wall Mount available for direct wall mounting and J-box mounting
- Optional for cast aluminum slipfitter mounting adapter (Compatible with more MESTER mounting adaptors such as Tenon, suits for various application)



**OAL-101/201/301-ACC-SFM**  
Slipfitter Mount  
An optional cast aluminum mast arm adapter secures fixture head to nominal 2-3/8" O.D. horizontal steel tenon arm.



**OAL-101/201/301-ACC-PM**  
Arm Mount  
(4" and 5" Square and Round poles)  
Standard versatile mounting arm is simple to install and can be used with existing poles for retrofit installations.



**OAL-101/201/301-ACC-WM**  
Wall Mount  
Wall Mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting




**OAL-101/201/301-ACC-TRN**  
Yoke Mount  
Die-cast Aluminum trunnion is easily adapted to many surfaces and allows easy fixture aiming angles.


**DIMENSION**

unit: inch/mm


**40W/70W/100W (Slipfitter Mount)**

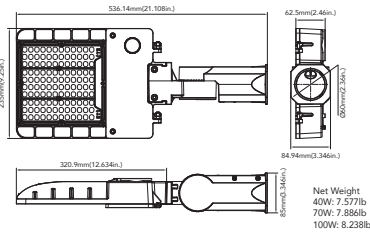


**150W/200W (Slipfitter Mount)**




**250W/300W (Slipfitter Mount)**

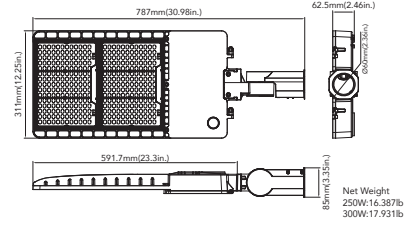


**40W/70W/100W (Pole Mount)**




**150W/200W (Pole Mount)**




**250W/300W (Pole Mount)**

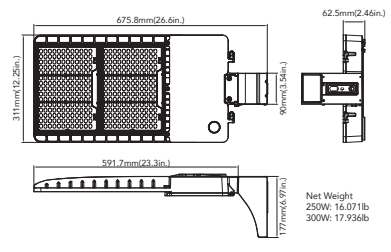


**40W/70W/100W (Wall Mount)**

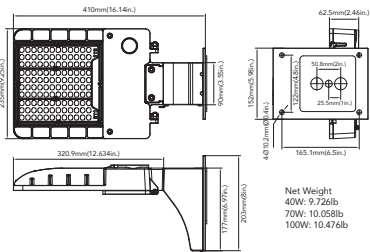


**150W/200W (Wall Mount)**

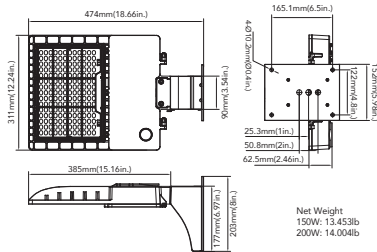


**250W/300W (Wall Mount)**

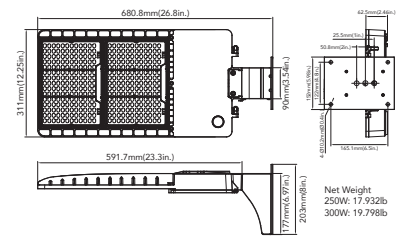


**40W/70W/100W (Yoke Mount)**

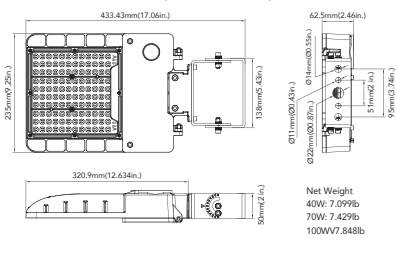

**150W/200W (Yoke Mount)**

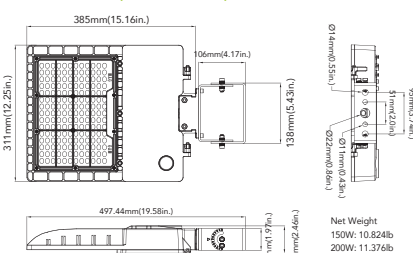

**250W/300W (Yoke Mount)**

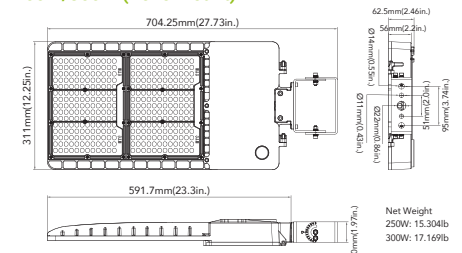

## ADDITIONAL MOUNTING ACCESSORIES

POLE BRACKET • For mounting one fixture on an existing pole			
	<p><b>OAL-ACC-4-SQPM</b> <b>4" Square Pole Mount with 2-3/8" O.D. Tenon</b></p> <p>Finish: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>		<p><b>OAL-ACC-4-RQPM</b> <b>4" Round Pole Mount with 2-3/8" O.D. Tenon</b></p> <p>Finish: Dark Bronze USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
	<p><b>OAL-ACC-5-SQPM</b> <b>5" Square Pole Mount with 2-3/8" O.D. Tenon</b></p> <p>Finish: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>		<p><b>OAL-ACC-5-RQPM</b> <b>5" Round Pole Mount with 2-3/8" O.D. Tenon</b></p> <p>Finish: Dark Bronze USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
	<p><b>OAL-ACC-TMA</b> <b>Pole Bracket accessories-Tenon &amp; Yoke Adaptor</b></p> <p>Finish: Dark Bronze USE: The 2-3/8" OD Tenon Mount Adaptor for Yoke Fixtures is designed to mount MESTER light fixtures that are equipped with a yoke mount onto a 2-3/8" OD tenon. It may be utilized with the Mester Flood Light Series of light fixtures.</p>		
WALL BRACKET • Attaches to any flat surface • Provides wiring access		Mid-Pole tenon Bracket	
	<p><b>OAL-ACC-90-WMB</b> <b>90° Wall Mount Bracket with 2-3/8" O.D. Tenon</b></p> <p>Finish: Dark Bronze USE: The 90° wall mount bracket with 2-3/8" tenon attaches an MESTER floodlight to almost any surface: wall, roof, or wood pole. Provides wiring access and abuilt-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slipfitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.</p>		<p><b>OAL-ACC-HOR-TMB</b> <b>2-3/8" OD Horizontal Tenon Mid-Pole Bracket</b></p> <p>Finish: Dark Bronze USE: 2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with a adjustable slipfitter onto a 2-3/8" OD horizontal tenon</p>
Round External Mount Horizontal Tenon • To mount 2/3/4 fixtures on a existing pole			
	<p><b>OAL-ACC-2-90-HOR-TA</b> <b>Double 90° Horizontal Tenon Adaptor</b></p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>		<p><b>OAL-ACC-3-120-HOR-TA</b> <b>Triple 120° Horizontal Tenon Adaptor</b></p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>
	<p><b>OAL-ACC-2-180-HOR-TA</b> <b>Double 180° Horizontal Tenon Adaptor</b></p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>		<p><b>OAL-ACC-4-90-HOR-TA</b> <b>Quad 90° Horizontal Tenon Adaptor</b></p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>
	<p><b>OAL-ACC-3-90-HOR-TA</b> <b>Triple 90° Horizontal Tenon Adaptor</b></p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>		