




**Dimensions:**

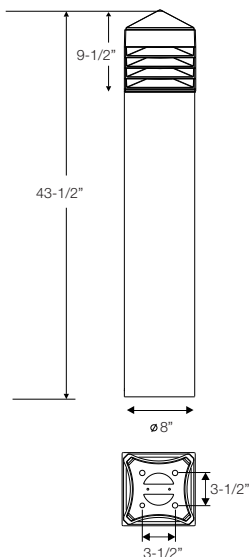

4-3/4"x16Tx10"  
Anchor Bolts included

**SUGGESTED USE**

Ideal for lighting pedestrian walkways and accenting the exterior grounds of office and apartment buildings, hotels and parks.

**CONSTRUCTION**


Heavy-duty cast aluminum body prevents corrosion and is vandal resistant. Mounting base design allows for a seamless flush appearance. Internal reflector designed to provide uniform illumination, glare control unstriated beam pattern. Angled louvers provide excellent light distribution and minimize glare. Internal gasket prevents water or any outside contaminants from entering the optical chamber. All HID & HPS units are supplied with 4KV E26 medium-base socket and all CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

**FINISH** - Bronze corrosion-resistant powder-coated finish is standard.

**LENS** - Integral glass clear lens is concealed by louver design and is UV rated.

**LISTINGS** - UL/C-UL for wet location

**OBO-101-MH-70-120**



Maximum Candela = 901,27 Located At Horizontal Angle = 200, Vertical Angle = 68  
# 1 - Vertical Plane Through Horizontal Angles (200- 20) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (68) (Through Max. Cd.)

**Ordering Guide > Example: OBO-101-MH-70-MVOLT-XT-BZ**

<b>OBO-101</b>				
<b>SERIES</b> OBO-101	<b>WATTAGE</b> <b>HPS, MH</b> HPS-50 - (50W High Pressure Sodium) HPS-70 - (70W High Pressure Sodium) MH-50 - (50W Metal Halide) MH-70 - (70W Metal Halide) <b>CFL</b> CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) CFL-1X42 - (1X42W Compact Fluorescent) <b>LED</b> LED-10-WW - (10W LED 2700K) LED-10-CW - (10W LED 4100K)	<b>VOLTAGE</b> - MVOLT(120/277) - 120 - 277	<b>OPTIONS</b> XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	<b>COLOR</b> BZ - Bronze