




Dimensions:

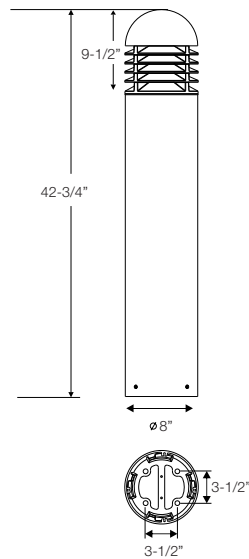

4-3/4"x16Tx10"
Anchor Bolts included

SUGGESTED USE

Ideal for lighting pedestrian walkways and accenting the exterior grounds of office and apartment buildings, hotels and parks.

CONSTRUCTION


Heavy-duty cast aluminum body prevents corrosion and is vandal resistant. Mounting base design allows for a seamless flush appearance. Internal reflector designed to provide uniform illumination, glare control unstriated beam pattern. Angled louvers provide excellent light distribution and minimize glare. Internal gasket prevents water or any outside contaminants from entering the optical chamber. All HID & HPS units are supplied with 4KV E26 medium-base socket and all CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Bronze corrosion-resistant powder-coated finish is standard.

LENS - Integral glass clear lens is concealed by louver design and is UV rated.

LISTINGS - UL/C-UL for wet location.

OBO-103-MH-70-120



Maximum Candela = 946.75 Located At Horizontal Angle = 90, Vertical Angle = 75
1 - Vertical Plane Through Horizontal Angles (90- 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (75) (Through Max. Cd.)

Ordering Guide > Example: OBO-103-MH-70-MVOLT-XT-BZ

OBO-103

SERIES
OBO-103

WATTAGE

HPS, MH
HPS-50 - (50W High Pressure Sodium)
HPS-70 - (70W High Pressure Sodium)
MH-50 - (50W Metal Halide)
MH-70 - (70W Metal Halide)

CFL

CFL-1X26 - (1X26W Compact Fluorescent)
CFL-1X32 - (1X32W Compact Fluorescent)
CFL-1X42 - (1X42W Compact Fluorescent)

LED

LED-10-WW - (10W LED 2700K)
LED-10-CW - (10W LED 4100K)

VOLTAGE

- MVOLT(120/277)
- 120
- 277

OPTIONS

XT - 20°F/-30°C Min. Temp.
Bal. (CFL only)

COLOR

BZ - Bronze