

SUGGESTED USE

Ideal for lighting pedestrian walkways and accenting the exterior grounds of office and apartment buildings, hotels and parks.



CONSTRUCTION - Extruded aluminum housing prevents corrosion and is vandal resistant. Mounting base design allows for a seamless flush appearance. Internal reflector designed to provide uniform illumination, glare control unstriated beam pattern. Angled louvers provide excellent light distribution and minimize glare. Internal gasket prevents water or any outside contaminants from entering the optical chamber. All HID & HPS units are supplied with 4KV E26 medium-base socket and all CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Black corrosion-resistant powder-coated finish is standard.

LENS - Clear glass lens with UV inhabitant.

LISTINGS - UL/C-UL for wet location.

OBO-104-CFL-1X42

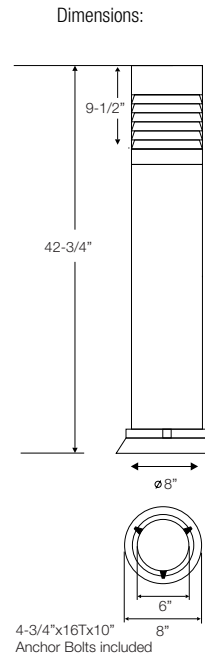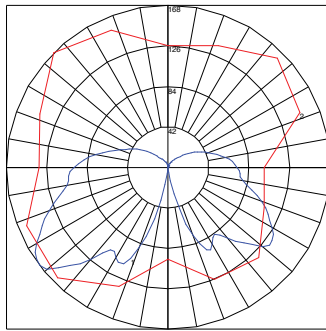

Ordering Guide > Example: OBO-104-MH-50-MVOLT-XT-BZ

OBO-104				
SERIES	WATTAGE	VOLTAGE	OPTIONS	COLOR
OBO-104	HPS, MH HPS-50 - (50W High Pressure Sodium) HPS-70 - (70W High Pressure Sodium) MH-50 - (50W Metal Halide) MH-70 - (70W Metal Halide)	- MVOLT(120/277) - 120 - 277	XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	BK - Black
	CFL CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) CFL-1X42 - (1X42W Compact Fluorescent)			
	INCANDESCENT INC-60 - (60W Incandescent Max.)			
	LED LED-10-WW - (10W LED 2700K) LED-10-CW - (10W LED 4100K)			