

SUGGESTED USE

For areas where smooth and wide light distribution is needed. Ideal for building facades, security, recreation facilities, parking lots, signs, and displays.

CONSTRUCTION

Die-cast aluminum corrosion-proof housing with hinged lens frame. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. The reflector is made of die-formed anodized aluminum for high efficiency & beam control. HID & HPS fixtures have porcelain 4KV pulse-rated medium-base socket with nickel-plated screw shell sockets. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Dark bronze corrosion-resistant polyester powder finish is standard.

LENS - Heat- and impact-resistant tempered glass lens.

INSTALLATION - Fixtures include a stamped steel yoke for trunnion mounting. Slipfitter and pole mount option also available.

LISTINGS - UL/C-UL for wet location.

LAMP - Included except for CFL option.

All specifications are subject to change without notice



Trunnion Mount
Shown- Standard

PULSE-START

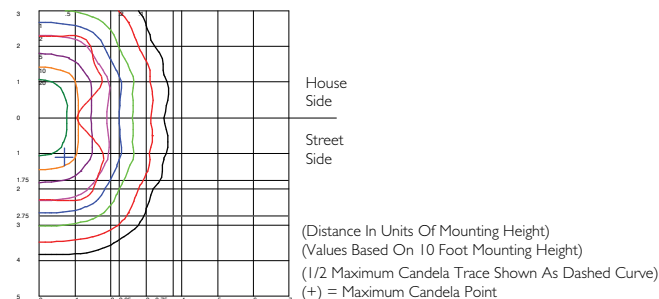
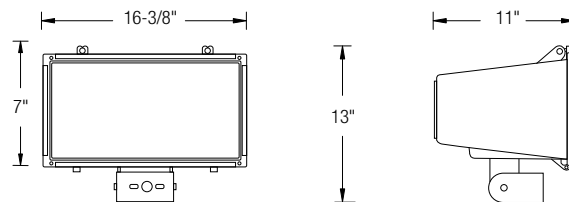
UL US
LISTED

FOR
WET
LOCATION



SAMEDAY
SHIPPING

PROUDLY
ASSEMBLED in
AMERICA

OFL-301-MH-400-MVOLT**Dimensions:****Ordering Guide > Example: OFL-301-MH-400-120-PC120-BZ****OFL-301**

SERIES
OFL-301

WATTAGE

HPS, MH
HPS-250 - (250W High Pressure Sodium)
HPS-400 - (400W High Pressure Sodium)
MH-100 - (100W Metal Halide)
MH-150 - (150W Metal Halide)
MH-175 - (175W Metal Halide)
MH-250 - (250W Metal Halide)
MH-320 - (320W Metal Halide)
MH-400 - (400W Metal Halide)
CFL
CFL-1X26 - (1X26W Compact Fluorescent)
CFL-1X32 - (1X32W Compact Fluorescent)
CFL-1X42 - (1X42W Compact Fluorescent)
CFL-2X26 - (2X26W Compact Fluorescent)
CFL-2X32 - (2X32W Compact Fluorescent)
CFL-2X42 - (2X42W Compact Fluorescent)
INDUCTION
IND-40-50K - (40W Induction)
IND-80-50K - (80W Induction)

VOLTAGE

HPS, MH^{1,4}
 - 120
 - MVOLT
 (120/208/240/277)
 - 347⁵
 - 480⁵
CFL^{2,3,4}
 - 120
 - MVOLT(120/277)
 - 208
 - 240
 - 347
INDUCTION⁶
 - MVOLT(120/277)

OPTIONS

PC120 - Photo control (120V only)
PC277 - Photo control (277V only)
SF - Single fuse
DF - Double fuse
O-EMG-750 - 750 lum. Emg. (CFL only)
XT - 20°F/-30°C Min. Temp. Bal. (CFL only)

COLOR
BZ - Bronze

ACCESSORIES

OFL-301-RL - Replacement lens kit

MOUNTING

(Blank) - Trunnion
OFC-AC-1 - Quad in-line bullhorn 180°
OFC-AC-2 - Triple in-line bullhorn 180°
OFC-AC-3 - Double in-line bullhorn 180°
OFC-AC-4 - Ground mount w/ 2" adj.
OFC-AC-5 - Quad in-line bullhorn 90°
OFC-AC-6 - Triple in-line bullhorn 120°
OFC-AC-7 - Wall mount plate for use w/ close pole mount
OFC-AC-8 - Wall mount bracket for single fixture mounted w/ adjustable strip fitter
OFC-AC-9 - Wall mount bracket 90° for single fixture mounted w/ adjustable strip fitter
OFC-AC-10 - Adjustable slip fitter
OFC-AC-12 - Close pole mount

NOTES:

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
4. (Consult factory) for other wattages and options.
5. 347 & 480 Volt not available on 50 & 70W fixture.
6. Induction fixtures shipped with 5000k lamp standard please contact factory for other color options.