


**MULTI LUMEN
SELECTOR**

EASY 3 COLORS
SELECCTOR
3000K • 4000K • 5000K



DIMENSIONS

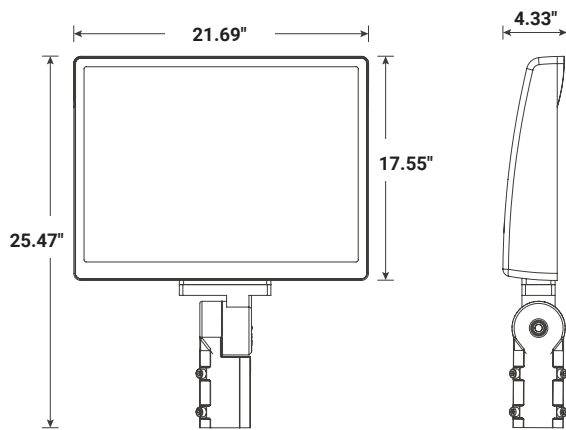

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
35000L	39741L	237W
49000L	54590L	332W
63000L	68385L	422W

Based on 4000K, 80+ CRI. Actual wattage may vary +/- 5%

FEATURES

MINIMAL DESIGN, MAXIMUM VERSATILITY

Minimal in aesthetic and versatile in application, this LED floodlight offers the ultimate in adaptable outdoor lighting. Field selectable multi-lumen and multi-CCT options allow for tailored power and atmosphere, while a 180 ° adjustable slipfitter mount allows for directional control. An integrated ON/OFF photocell maximizes energy savings. A broad, even illumination makes it ideal for lighting perimeters, facades, and landscapes in government and commercial buildings, higher education campuses, and more. IP65 rated and wet location suitable.

LUMENS	35000L/49000L/63000L
CCT	30K/40K/50K
CRI	80+ Standard
COLOR QUALITY	3-Step MacAdam Ellipse
MOUNTING	Slipfitter Mount, Knuckle Mount, Yoke Mount,
DIMMING	DIM10 - 0-10V Flicker Free 10% Dimming
DISTRIBUTION	Flood (FL) at 80° Beam Angle
FINISH	Bronze (BZ), Black (BK), White (WH) Custom Color
WORKING TEMP.	-30°C (-22°F) to 40°C (104°F)
RATING	IP65
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC	In accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS

Features a one piece, clear glass lens for a broad distribution and even beam diffusion. A slightly hooded design and regressed LED board and reflector helps direct light fall and create, soft, even illumination.

An adjustable slipfitter bracket with 180° rotation (from 0°- 30°- 60° on either side) allows for flexible, adaptable illumination.

Available in a high output multi-lumen package of 35000L/49000L/63000L. Three selectable color temperature settings of 3000K/4000K/5000K allow for in-field selection of different moods and atmospheres.

CONSTRUCTION

Body built from durable, die-cast aluminum for lightweight handling and installation. A finned back design enables advanced heat dissipation to prevent overheating.

IP65 rated and fully sealed and gasketed for wet location use.

Multi-lumen and multi-CCT switches and integrated ON/OFF photocell conveniently located in luminaire side, under screw-in knockout.

Features a rust-resistant textured finish with Super TGIC polyester powder coat paint in a bronze finish, providing outstanding protection against weathering and corrosion. Contact the factory for black, white, or other custom RAL color options.

MOUNTING

Suitable for Knuckle, Yoke, and slipfitter mount. Slipfitter mount included and pre-installed. Yoke option sold separately. Knuckle must be bought elsewhere.

MAINTENANCE

Fixture may be wiped down with a dry or damp cloth for optimal performance.

OPTIONS & ACCESSORIES

- Integrated ON/OFF photocell included standard for maximum energy savings
- Yoke mount sold separately

DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant current LED drivers, rated for 50-60Hz operation at 120/277V 60Hz input. Maintains a power factor between 0.90 and 1.00 with less than 20% THD and a flicker index below 30%.

DIMMING

DIM10 - Flicker Free 10% Dimming Standard (DIM10) on either MVOLT 120 or 277.


WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

UL listed.
DLC Premium Listed.
IP65 rated for ingress protection and wet location use.

ADJUSTABILITY CONTROL

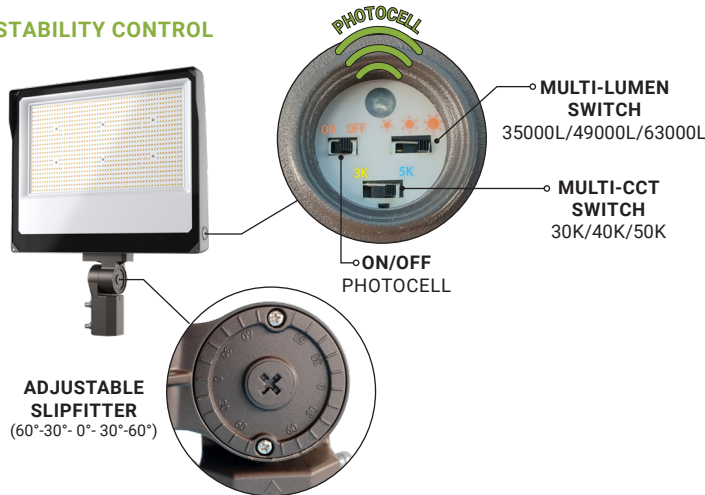

MOUNTING



Example: **OFL-303-LED-35000L/49000L/63000L-DIM10-MVOLT-30K/40K/50K-BZ**

SERIES	LUMENS	DIMMING	VOLTAGE	CCT	FINISH	OPTION
OFL-303-LED	35000L/49000L/63000L	DIM10 0-10V	MVOLT 120-277V	30K/40K/50K	BK - Black BZ - Bronze WH - White RAL - Custom	OFL-203/303 ACC-YM - Yoke Mount


OFL-303-LED-35000L-49000L-63000L-DIM10-MVOLT-30K-40K-50K-BZ(35000L)

TEST NO.: EL12042507


INPUT WATTS:237.0

LUMENS:39741

EFFICACY: 168



	0°	90°
0°	14180	14180
10°	13948	14007
20°	13251	13396
30°	12160	12355
40°	10621	10875
50°	8623	8948
60°	6052	6534
70°	2810	3587
80°	418	1005
90°	17	23



ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% LUMINAIRE
0° - 20°	5221	13%
0° - 30°	11150	28%
0° - 40°	18385	46%
0° - 60°	32743	82%
0° - 80°	39483	99%
0° - 90°	39741	100%


OFL-303-LED-35000L-49000L-63000L-DIM10-MVOLT-30K-40K-50K-BZ(49000L)

TEST NO.: EL12042507


INPUT WATTS:332.0

LUMENS:54590

EFF|CACY: 164



CANDELA TABLE		
	0°	90°
0°	19476	19476
10°	19156	19239
20°	18196	18405
30°	16700	16973
40°	14588	14944
50°	11842	12290
60°	8310	8971
70°	3854	4952
80°	570	1388
90°	24	32



ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% LUMINAIRE
0° - 20°	7170	13%
0° - 30°	15313	28%
0° - 40°	25250	46%
0° - 60°	44969	82%
0° - 80°	54237	99%
0° - 90°	54590	100%


OFL-303-LED-35000L-49000L-63000L-DIM10-MVOLT-30K-40K-50K-BZ(63000L)

TEST NO.: EL12042507


INPUT WATTS:421.9

LUMENS:68385

EFFICACY: 162



	0°	90°
0°	24235	24235
10°	23861	23947
20°	22708	22911
30°	20907	21162
40°	18334	18646
50°	14951	15377
60°	10557	11286
70°	5025	6238
80°	756	1674
90°	6	15



ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% LUMINAIRE
0° - 20°	8925	13%
0° - 30°	19073	28%
0° - 40°	31481	46%
0° - 60°	56240	82%
0° - 80°	68002	99%
0° - 90°	68385	100%