




**DIMENSIONS**

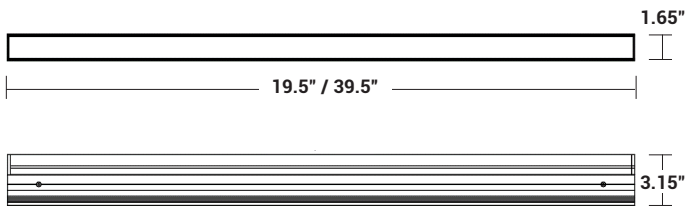

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1500L	1500L	18W
3000L	3000L	36W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

**FEATURES**

This LED in-ground linear is a sleek solution engineered for the seamless integration of performance and aesthetics. A trimless design offers a clean, unobtrusive look, while advanced anti-glare technology ensures comfortable, glare-free illumination. Available to order with various lens, distribution, and connector options, for versatile, adaptable illumination.

Ideal for wall wash, accent, and general lighting in gardens, landscapes, walkways, and facades in both residential and commercial spaces. Rated IP67 for outdoor and wet location use.

LUMENS	1500L (20"), 3000L (40")
CCT	27K, 30K, 35K, 40K, 50K
CRI	90+ Standard
COLOR QUALITY	3-Step MacAdam Ellipse
MOUNTING	Recessed In-ground
LENGTH	20", 40"
OPTICS	15°, 25°, 40°, 20°x 55°, 30°x 40°
DIMMING	DIM10, DIMTR, DALI
FINISH	Black (BK)
WORKING TEMP.	-20°C (-4°F) to 40°C (104°F)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC	In accordance with IES LM79-08, LM80 and TM-30, TM-21

- Trimless design for seamless integration
- Anti-glare grid enhances visual comfort
- High density 6063 aluminium profile
- Versatile beam angles



### OPTICS

Features an optical grade clear PMMA lens for even beam diffusion. Available to order with an anti-glare grid lens for advanced glare-control and various distribution options for several distributions available.

20" model available to order in 1500L.  
40" model available to order 3000L. Both sizes available in single CCT options of 27K, 30K, 35K, 40K, or 50K.

### CONSTRUCTION

Housing made from a durable, high-density 6063 aluminum. Features silicone rubber, corrosion resistant gasketing.

Sealed and IP67 rated for outdoor wet location use.

Driver located in jbox on back of fixture.

Available in standard black finish.

### MOUNTING

Suitable for recessed, in-ground mounting. Compatible with 3-pin and 6-pin 2-way gel filled IP68 waterproof connectors.

### MAINTENANCE

Fixture can be regularly and safely wiped down to ensure optimal fixture performance.

### OPTIONS & ACCESSORIES

Available with either clear lens or anti-glare grid lens options, with various distributions each.

Clear Lens Distributions:	Anti-glare Grid Lens Distributions:
15°	15°
25°	25°
40°	30°X40°
20° X 55°	20° X 55°

Available to order separately:

- 20" & 40" mounting sleeve
- 3-pin 2-way gel filled IP68 waterproof connector
- 6-pin 2-way gel filled IP68 waterproof connector

See order chart for more details.

### DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant-current LED drivers which are rated for 50 to 60Hz at 120/277v input, produce less than 20% THD, and have a power factor of .90 to 1.00. Thermally protected for increased performance and safety.

### DIMMING

DIM10 - 0-10V Dimming on either MVOLT 120, 277.  
DIMTR - Triac & electronic low voltage dimming. Available in 120V.  
DALI - DALI DT6, DT8 dimming.

### WARRANTY

5-year warranty for parts and components (labor not included).

### LISTINGS

ETL listed.  
IP67 rated for outdoor and wet location use.  
RoHs compliant – Contains no mercury or lead.

### OPTION & ACCESSORIES

**MOUNTING SLEEVE**  
(SOLD SEPARATELY)



A-OIGL-MS-20 (20")  
A-OIGL-MS-40 (40")

**2-WAY IP68 WATERPROOF CONNECTOR**  
(SOLD SEPARATELY)



A-OIGL-2WPC-3P-IP68 (3-pin)  
A-OIGL-2WPC-6P-IP68 (6-pin)

Example: **OIGL-101-LED-20-1500L-DIM10-MVOLT-30K-90-CL-15-BK**

SERIES	LENGTH	LUMENS	DIMMING	VOLTAGE	CCT	CRI	LENS TYPE	DISTRIBUTION	FINISH	OPTION
OIGL-101-LED	20 - 20" 40 - 40"	1500L (20") 3000L (40")	DIM10 - 0-10V DIMTR - Triac 120V DALI - Dali DT6, DT8	MVOLT (120-277V)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	90	CL - Clear Lens AG - Anti-glare Grid	Clear Lens: 15° 25° 40° 20°X55° Anti-glare Grid: 15° 25° 30°X40° 20°X55°	BK - Black	A-OIGL-2WPC-3P-IP68 3-pin 2-way IP68 Connector A-OIGL-2WPC-6P-IP68 6-pin 2-way IP68 Connector A-OIGL-MS-20 20" Mounting Sleeve A-OIGL-MS-40 40" Mounting Sleeve