



SUGGESTED USE

For areas where smooth and wide light distribution is needed. Ideal for building facades, security, recreation facilities, parking lots, signs, and displays.

CONSTRUCTION


Stainless steel corrosion-proof housing with PVC sleeve. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber.

LENS - Clear, heat- and impact-resistant tempered glass lens.

LAMP/WATTAGE - 50W incandescent or 10W LED.

All specifications are subject to change without notice

Dimensions:

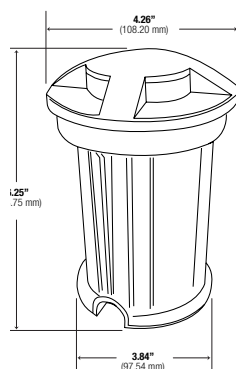

Ordering Guide > Example: OIWL-103-MR16-10W-LED-12-CL

OIWL-103

SERIES

OIWL-103 - Oracle
In-Ground Well Light

LAMP TYPE/WATTAGE

MR16
(50W Maximum)
(10W LED)

VOLTAGE

12V

COLOR

SS - Stainless Steel

***MUST BE USED WITH REMOTE TRANSFORMER**