

SUGGESTED USE

For areas where smooth and wide light distribution is needed. Ideal for building facades, security, recreation facilities, parking lots, signs, and displays.

CONSTRUCTION

Made of brass corrosion-proof housing. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber.

FINISH - Brass corrosion-resistant polyester powder finish is standard.

LENS - Clear convex, heat- and impact-resistant tempered glass lens.


LAMP/WATTAGE - 50W incandescent or 10W LED.

INSTALLATION - Fixtures offer an adjustable knuckle with 1/2" NPT threads for easy mounting to boxes or adapters. Bottom feed wiring.

All specifications are subject to change without notice



Dimensions:

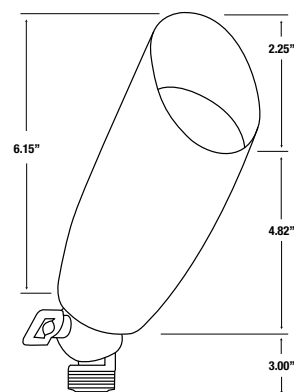

Ordering Guide > Example: Ordering Guide Example: OLD2-MR16-10W-LED-12-BZ

OLD2			
SERIES	LAMP TYPE/WATTAGE	VOLTAGE	COLOR
OLD2-Directional Spot Light	MR16 (50W Maximum) (10W LED)	12V	PB - Polished Brass WB - Weathered Brass

***MUST BE USED WITH REMOTE TRANSFORMER**