



**LUMENS**

1000L / 1500L / 2000L / 2500L / 3000L / 4000L  
2000L / 3000L / 4000L / 5000L / 6000L / 8000L  
3000L / 4500L / 6000L / 7500L / 9000L / 12000L

**CCT & TECHNOLOGIES**

27K, 30K, 35K, 40K, 50K, Tunable White,  
Dims to Warm, RGB + White

**COLOR QUALITY**

3 Step MacAdam Ellipse

**DIMMING & CONTROLS**

0-10V Flicker Free 1% Dimming Standard (DIM10)  
LUTH, DIMTR

**SIZE**

40" L x 16" W / 64" L x 16" W / 88" L x 16" W

**HEIGHT**

11.5"

**FIXTURE FINISH**

BK (Black), WH (Matt White), SI (Silver), Custom RAL

**MATERIAL COLORS**

Refer to SoftSense Material Color Chart

**PHOTOMETRIC TESTS**

In Accordance with IES LM79-08 and LM-80, and TM-30

**MOUNTING**

Suspended

“Stanza” family consists of acoustic suspended linear fixtures. The COIL Acoustic LED Suspended Linear combines high-performance lighting with integrated acoustic functionality. Wrapped in sound-absorbing material, it delivers continuous, uniform, and glare-free illumination while helping to control reverberation in open-plan spaces.



**ACOUSTIC MATERIAL - 9mm / 0.35" Thickness**

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.


**ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels**

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75

Weighted Sound Absorption Coefficient -  $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

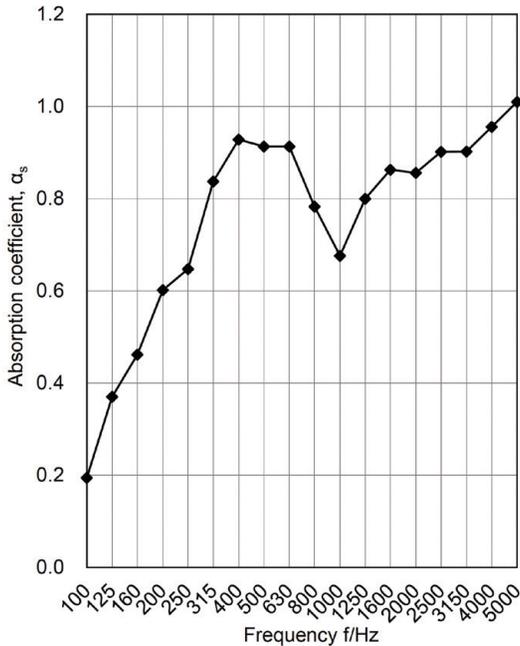

**OPTICS & PERFORMANCE**

The light engines found in the OLS-LED-Rhapsody are rated at 85+ CRI and are available in multiple CCTs: 3000K, 3500K, and 4000K. Rated and tested to LM-79, LM-80, and TM-30 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

**CONSTRUCTION**

PET material wrapped around rigid steel design that ensures longevity and endurance. A high quality, high transmission PMMA glare free lens offers smooth illumination.

**DRIVER ELECTRICAL INFORMATION**

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. OPR-LED-Rhapsody comes standard with 0-10V dimming on either 120V-277V.

**DIMMING**

**DIM10** - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120V or 277V.

**DIMTR** - Triac & Electronic low voltage dimming. Available in 120V.

**LUTH** - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

**MOUNTING**

Comes standard in adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings. Also available in pendant mount.

**WARRANTY**

5-year warranty for parts and components (labor not included).

**LISTINGS**

**c-UL-us** - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

**UL Listed for Dry locations.**

**QUALITY CONTROL**

Every fixture is rigorously tested by our QC Department before shipping.

**MAINTENANCE**

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

**OPTIONS**

Available without light source.

**LUMEN DETAILS**

Based on 4000K, 85+ CRI.

Actual wattage may vary +/- 5%

**2 ft. Light Fixture**

**Direct**  
High Performance

LUMENS	WATTS
4000	28.2
3000	20.6
2500	17
2000	14.6
1500	11
1000	7

**4 ft. Light Fixture**

**Direct**  
High Performance

LUMENS	WATTS
8000	56.4
6000	41.2
5000	34
4000	29.2
3000	22
2000	14

**6 ft. Light Fixture**

**Direct**  
High Performance



LUMENS	WATTS
12000	84.6
9000	61.8
7500	51
6000	43.8
4500	33
3000	21

Example: **OLS-RHAPSODY-SOFT-COIL-40-1000L-DIM10-MVOLT-40K-85-WH-WM-GRN**

OLS-RHAPSODY-SOFT												GRN
SERIES	STYLE	SIZE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	FINISH	MOUNTING OPTION	ACOUSTIC COLOR	
OLS-RHAPSODY-SOFT SoftSense LED Pendant	COIL - Coil	40 - 40" L x 16" W (Light Fixture Size: 2 ft.)	1000L - 1000 Lumens 1500L - 1500 Lumens 2000L - 2000 Lumens 2500L - 2500 Lumens 3000L - 3000 Lumens 4000L - 4000 Lumens NLS <sup>2</sup> - no light source	DIM10 - 0-10V Dimming LUTH - Lutron HiLumen DIMTR <sup>3</sup> - Triac Dimming	120 277 MVOLT	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	85 90+	0-EMG-LED-10W 0-EMG-LED-20W 0-EMG-LED-10W-SDT 0-EMG-LED-20W-SDT	WH - Matte White BK - Black SI - Silver RAL <sup>1</sup> - custom color	SM - Suspended Mount	Refer to SoftSense material color chart for options example: GRN - Green	
		64 - 64" L x 16" W (Light Fixture Size: 4 ft.)	2000L - 2000 Lumens 3000L - 3000 Lumens 4000L - 4000 Lumens 5000L - 5000 Lumens 6000L - 6000 Lumens 8000L - 8000 Lumens NLS <sup>2</sup> - no light source									
		88 - 88" L x 16" W (Light Fixture Size: 6 ft.)	3000L - 3000 Lumens 4500L - 4500 Lumens 6000L - 6000 Lumens 7500L - 7500 Lumens 9000L - 9000 Lumens 12000L - 12000 Lumens NLS <sup>2</sup> - no light source									

<sup>1</sup> Consult Factory  
<sup>2</sup> No Light Source, please skip to "Mounting Option"  
<sup>3</sup> DIMTR available only in 120V

**DIMENSIONS**

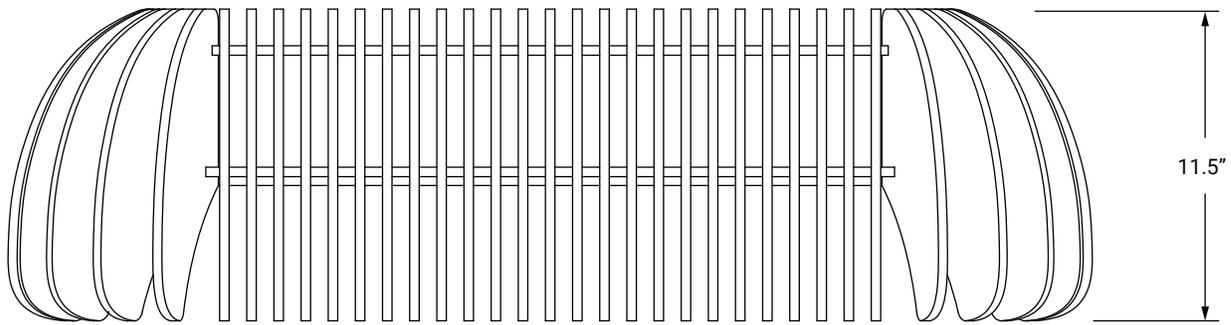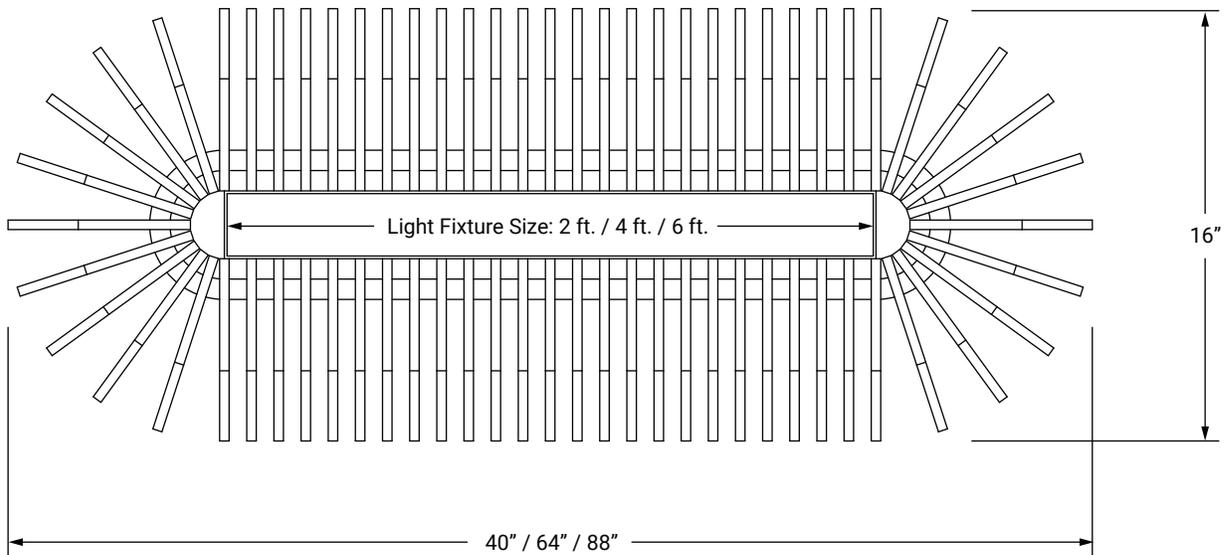

**STANDARD COLORS**

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated

<b>PURE</b> PUR	<b>STONE</b> STN	<b>BONE</b> BNE	<b>PEACH</b> PCH
<b>GRAY NOISE</b> NSE	<b>GREIGE</b> GRG	<b>SAND</b> SND	<b>ORANGE</b> ORA
<b>PEBBLE</b> PEB	<b>FOG</b> FOG	<b>DUST</b> DST	<b>BRASS</b> BRS
<b>GRAVEL</b> GRV	<b>WARM GRAY</b> WGR	<b>LATTE</b> LTE	<b>BRONZE</b> BRZ
<b>SHADOW</b> SHD	<b>HIPPO</b> HIP	<b>CLAY</b> CLA	<b>RUST</b> RST
<b>ASPHALT</b> ASP	<b>PERIWINKLE</b> PRW	<b>KELP</b> KLP	<b>PECAN</b> PEC
<b>ABYSS</b> ABS	<b>SKY BLUE</b> SBL	<b>CROCODILE</b> CRC	<b>FIG</b> FIG
<b>NIGHT</b> NIT	<b>SAPPHIRE</b> SAP	<b>SAGE</b> SGE	<b>EGGPLANT</b> EGP
<b>MIDNIGHT</b> MDN	<b>NAVY</b> NVY	<b>PISTACHIO</b> PST	<b>AMETHYST</b> AME
<b>EVERGREEN</b> EVG	<b>SEAWEED</b> SWD	<b>MATCHA</b> MCH	<b>PLUM</b> PLU
<b>MOSS</b> MOS	<b>BAY</b> BAY	<b>OLIVE</b> OLV	<b>CABBAGE</b> CBG
<b>COFFEE</b> CFE	<b>SEA</b> SEA	<b>GREEN</b> GRN	<b>PINK</b> PNK
<b>WINE</b> WIN	<b>DARK TEAL</b> DTL	<b>SUNSHINE</b> SUN	<b>PASSION</b> PAS



quick ship available for any color depending on order quantity  
\*all colors are ASTM E84-16 fire rated, select colors are available as Class A