

<b>LUMENS</b>	500, 750, 1000, 1250, 1500, 2000/FT.	<b>LENGTH + HEIGHT</b>	Customizable (see page 3 for dimensions)
<b>CCT &amp; TECHNOLOGIES</b>	27K, 30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White	<b>THICKNESS</b>	2.85"
<b>COLOR QUALITY</b>	3 Step MacAdam Ellipse	<b>FIXTURE FINISH</b>	BK (Black), WH (Matt White), SI (Silver), Custom RAL
<b>MOUNTING</b>	Suspended	<b>MATERIAL COLORS</b>	Refer to SoftSense Material Color Chart
<b>DIMMING &amp; CONTROLS</b>	0-10V Flicker Free 1% Dimming Standard (DIM10) LUTH, DIMTR	<b>PHOTOMETRIC TESTS</b>	In Accordance with IES LM79-08 and LM-80, and TM-30

“Stanza” family consists of acoustic suspended linear fixtures. ILLUSTRA Acoustic LED Suspended Linear combines high-performance lighting with integrated acoustic functionality. Wrapped in sound-absorbing material, it delivers continuous, uniform, and glare-free illumination while helping to control reverberation in open-plan spaces.



02.11.26

**ACOUSTIC MATERIAL - 9mm / 0.35" Thickness**


Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

**ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels**

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75  
Weighted Sound Absorption Coefficient -  $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

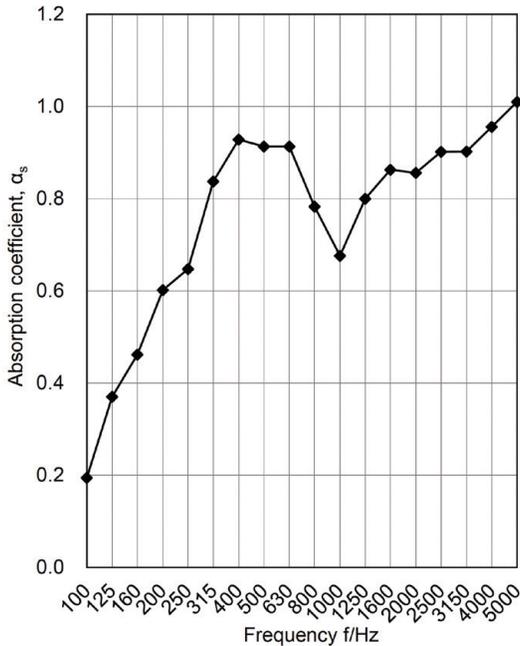

**OPTICS & PERFORMANCE**

The light engines found in the OLS-LED-Rhapsody are rated at 85+ CRI and are available in multiple CCTs: 3000K, 3500K, and 4000K. Rated and tested to LM-79, LM-80, and TM-30 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

**CONSTRUCTION**

PET material wrapped around rigid steel design that ensures longevity and endurance. A high quality, high transmission PMMA glare free lens offers smooth illumination.

**DRIVER ELECTRICAL INFORMATION**

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. OPR-LED-Rhapsody comes standard with 0-10V dimming on either 120V-277V. For 347V, please consult factory. Consult factory for dimmer compatibility.

**DIMMING**

**DIM10** - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120V or 277V.

**DIMTR** - Triac & Electronic low voltage dimming. Available in 120V.

**LUTH** - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

**MOUNTING**

Comes standard in adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings. Also available in pendant mount.

**WARRANTY**

5-year warranty for parts and components (labor not included).

**LISTINGS**

**c-UL-us** - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

**UL Listed for Dry locations.**

**QUALITY CONTROL**

Every fixture is rigorously tested by our QC Department before shipping.

**MAINTENANCE**

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

**OPTIONS**

Available without light source.

**LUMEN DETAILS**

Based on 4000K, 85+ CRI.

Actual wattage may vary +/- 5%

Direct High Performance	
LUMENS/FT	WATTS/FT
2000	14.1
1500	10.3
1250	8.5
1000	7.3
750	5.5
500	3.5


Example: **OLS-RHAPSODY-SOFT-ILLUSTRA-3FT-2FT-1000L-DIM10-MVOLT-40K-85-WH-WM-GRN**

OLS-RHAPSODY-SOFT													GRN
SERIES	STYLE	LENGTH	HEIGHT	LUMENS PER FOOT	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	FINISH	MOUNTING OPTION	ACOUSTIC COLOR	
OLS-RHAPSODY-SOFT SoftSense LED Pendant	ARCUS - Arcus	2FT - 2 ft. 3FT - 3 ft. 4FT - 4 ft. 5FT - 5 ft. 6FT - 6 ft. 8FT - 8 ft.	2FT - 2 ft. 3FT - 3 ft. 4FT - 4 ft.	500L - 500 Lumens 750L - 750 Lumens 1000L - 1000 Lumens 1250L - 1250 Lumens 1500L - 1500 Lumens 2000L - 2000 Lumens	DIM10 - 0-10V Dimming LUTH - Lutron HiLumen DIMTR <sup>3</sup> - Triac Dimming	120 277 MVOLT	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	85 90+	0-EMG-LED-10W 0-EMG-LED-20W 0-EMG-LED-10W-SDT 0-EMG-LED-20W-SDT	WH - Matte White BK - Black SI - Silver RAL <sup>1</sup> - custom color	SM - Suspended Mount	Refer to SoftSense material color chart for options example: GRN - Green	

NLS<sup>2</sup> - no light source

- <sup>1</sup> Consult Factory
- <sup>2</sup> No Light Source, please skip to "Mounting Option"
- <sup>3</sup> DIMTR available only in 120V

**DIMENSIONS**

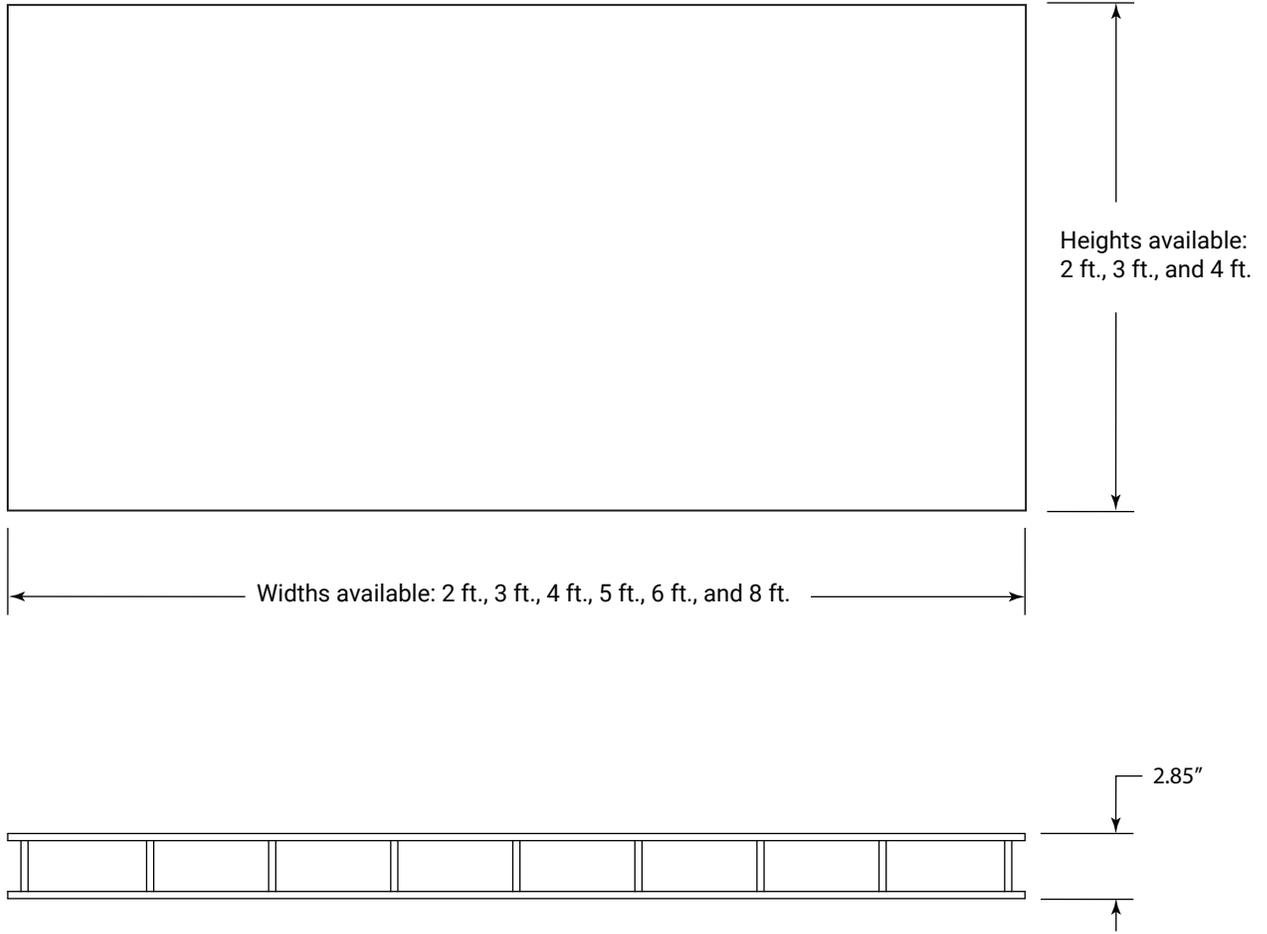

**STANDARD COLORS**

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)



All panels ASTM E84-16 Fire Rated

**STANDARD PRINTS**

Panel Thickness: 8.5 mm / 0.34" (+/- 0.5 mm)



prints shown at 12% scale



quick ship available for any color depending on order quantity  
\*all colors are ASTM E84-16 fire rated, select colors are available as Class A