




"Stanza" family consists of acoustic suspended linear fixtures. FLEX Acoustic LED Suspended Linear combines high-performance lighting with integrated acoustic functionality. Wrapped in sound-absorbing material, it delivers continuous, uniform, and glare-free illumination while helping to control reverberation in open-plan spaces. Fully illuminated corners and flexible shaping options allow you to design striking, seamless forms that enhance both the visual and acoustic comfort of corporate, educational, commercial, and retail environments.

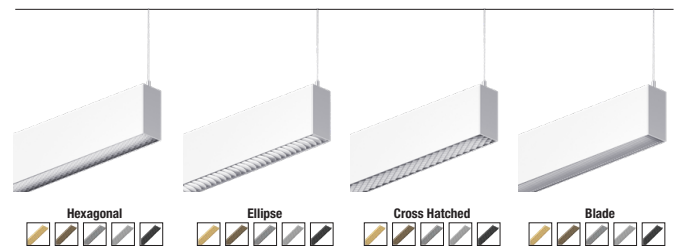

OPTICS, PERFORMANCE, & OPTICAL ASSEMBLY

Constructed from durable 20-gauge aluminum with precision-mitered corners, the fixture is post-painted using a premium paint with 95% reflectivity. Its high-efficiency LED optical system delivers uniform, glare-free illumination through a high-quality acrylic lens, ensuring optimal light distribution and visual comfort. For assembly of wall wash distribution, reflectors are positioned at an angle.

A UGR (Unified Glare Rating) of less than 19 minimizes the effect of glare, enhancing well-being and reducing discomfort.

DISTRIBUTION PATTERNS & DIFFUSER

Available distributions include direct downlight and wall wash, with louver options in blade, ellipse, crosshatch, and hexagonal patterns as well as indirect: standard, wall wash, batwing - all engineered for zero light leakage.

Standard - A high-quality, smooth white frosted efficient acrylic lens is shipped standard for optimal distribution patterns, for most applications, and provides glare-free, even illumination.

Wall Wash - Provides uniform, vertical illumination from the ceiling down

Batwing - Illuminates with a wide spread distribution for better energy efficiency and increased ceiling uniformity.

CRM INSTALLATION

For continuous row mounting, the first luminaire in the row will always be the power supply feed. After plugging in the male and female harnesses, which are supplied with each luminaire, they will easily slide together, then secured with two screws from opposite directions in the connecting brackets.

CONSTRUCTION

One-piece rigid aluminum extrusion, made of T6063-T5 aluminum, with cast aluminum end caps. A precision cut, smooth white extruded frosted lens with snap in design attaches firmly into the grooves of the body and can be easily removed for access to the driver and LED boards.

For indirect distribution, the lens can be installed flush against the luminaire, or extended off the surface of the luminaire, creating a soft glow of light.

ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

SOUND ABSORPTION RESULTS (below, left)

Felt Fixtures, alternating with / without light fixtures (8 units total)



ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels (below, right)

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75

Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

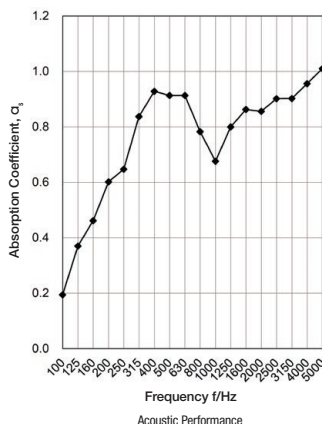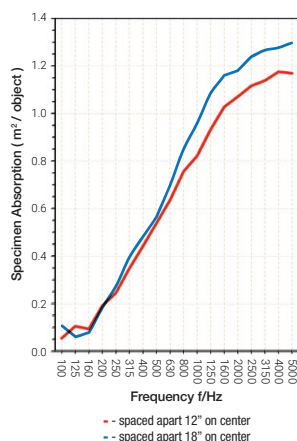

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and female 18-gauge 6 wire plug connectors are included with every luminaire to allow for simple hassle-free continuous wiring, and each luminaire must be installed male to female.

LED DYNAMIC PLATFORM OPTIONS / TECHNOLOGY



TWH - Tunable White with Smart White



WDM - Dims to Warm with Smart Dimming



RGBW - RGB + White with Smart Hue

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUTH - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology

ELDO10.1-LIN - EldoLED SoloDrive 0-10V. Dimming down to 0.1%

DALI - DALI DT6, DT8 dimming down to 1%

ELDODMX - EldoLED PowerDrive dimming down to 0.1%

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMTR - Triac & Electronic low voltage dimming. Available in 120V.

DIM10-0-OFF - Program DIM10 to OFF with linear dimming curve 0.1%

ELDO10-LOG - ELDO10-LOG with logarithmic dimming curve

POE - Power-over-Ethernet depending on the PoE manufacturer selected. The Node will be installed in factory as either integral to the luminaire or as a remote module.

BLE - Luminaires may be controlled, grouped, scheduled, or placed in scenes and or zones via Casambi Bluetooth 4.0 App

XSR - Xitanium SR Dimming

DIM10-AUX - 0-10V with auxiliary power.

SUPPORT CABLE / FEED

Standard suspension is conductive feed/suspension cable. The adjustable power cable comes in a standard 10' length. A 5-conductor cable is standard or a 6-conductor cable for emergency power. Field adjustable length. Max. support every 8 feet. For longer cable, please consult factory.

LISTINGS

c-UL-us - Listed for protected damp locations, indoor use only.

UL Listed for Damp location.

FCC 15 - EMI / RFI emissions per FCC 47CFR part 15 at 120VAC or 277VAC

RoHS - Contains no mercury or lead and RoHS compliant

All LED luminaires are rated and tested to **LM-79** and **LM-80** standards by an independent laboratory.

Photometric testing completed in accordance with IES

LM-79 and **TM-30** standards with calculated Life Time: L70 at 200,000 hrs can be used for **State of California Title 24 high efficacy LED compliance**

DLC® - certified, Listed for DLC, California Title 24 compliant.

BAA - Buy American Act Compliant government procurement requirements under FAR, DFARS and DOT regulations.

Acoustic Portion: **ASTM-E84 Fire Rated**

WARRANTY

Five-year warranty for parts and components. (Labor not included)

MAINTENANCE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

OPTIONS

Available without a light source.

For just the acoustic sleeve, please consult factory.

Example: OLS-DI-STANZA-SOFT-2-S-6-8IN-500L-HP-HEX-GD-U500L-DIM10-1C-MVOLT-35K-90-BK-GRN

SERIES	STYLE	WIDTH	SHAPE	LENGTH ⁵	HEIGHT	DIRECT LUMENS / FT	DISTRIBUTION	INDIRECT LUMENS / FT	DISTRIBUTION	# OF CIRCUITS																																																																																																																
OLS-DI-STANZA-SOFT SoftSense Suspended LED Linear	[BLANK] - Standard	2 - 2.5" 4 - 4" luminaire width	S - Single CR - Continuous Run any run up to 12' is a single unit	2' - 2" 4' - 4" 6' - 6" 8' - 8" XX - Custom ¹ unit feet, inches / example 12.8 - 12FT 8IN any run up to 12' is a single unit	5IN - 5" 8IN - 8" 12IN - 12" 16IN - 16" XXIN - Custom ¹	500L - 500 Lumens 750L - 750 Lumens 1000L - 1000 Lumens 1250L - 1250 Lumens 1500L - 1500 Lumens 2000L - 2000 Lumens ³ 500L-HP - 500 Lumens ³ 750L-HP - 750 Lumens ³ 1000L-HP - 1000 Lumens ³ 1250L-HP - 1250 Lumens ³ 1500L-HP - 1500 Lumens ³ 2000L-HP - 2000 Lumens ³ NLS - No Light Source ² XXXL - Custom ¹ unit: Lumens per foot / example: 600L - 600 Lumens only available from 250L - 1500L	[BLANK] - Standard WW - Wall Wash BLR - Blade Louver HEX - Hexagonal Louver CRL - Cross Hatched Louver ELS - Ellipse Louver LOUVER FINISH BK - Black FR - Frosted CH - Chrome CHP - Champagne GD - Gold required for louvre distributors / example: HEX-GD	U500L - 500 Lumens U750L - 750 Lumens U1000L - 1000 Lumens U1250L - 1250 Lumens U1500L - 1500 Lumens U500L-HP - 500 Lumens ³ U750L-HP - 750 Lumens ³ U1000L-HP - 1000 Lumens ³ U1250L-HP - 1250 Lumens ³ U1500L-HP - 1500 Lumens ³ NLS - No Light Source ² UXXXL - Custom ¹ unit: Lumens per foot / example: 1000L - 600 Lumens only available from 250L - 1500L	[BLANK] - Standard WW - Wall Wash BW - Batwing RBW - Regressed Batwing BW90 - Batwing 90° ASM - Asymmetric 30° ICW - Indirect Ceiling Wash 60° IW - Indirect Wide 120°	1C Up and Down Lights Controlled Together 2C Up and Down Lights Controlled Individually																																																																																																																
<table border="1"> <thead> <tr> <th>DIMMING</th> <th>VOLTAGE</th> <th>CCT</th> <th>CRI</th> <th>FINISH</th> <th>EMERGENCY</th> <th>COLOR</th> <th>OTHER OPTIONS</th> </tr> </thead> <tbody> <tr> <td>DIM10 - 0-10V Dimming</td> <td>MVOLT</td> <td>27K - 2700K</td> <td>85 - 85</td> <td>WH - White</td> <td>0-EMG-LED-10W</td> <td>refer to SoftSense material color chart for options example: GRN - Green</td> <td>FBF - Internal Fast Blow Fuse</td> </tr> <tr> <td>LUTH - Lutron HiLum</td> <td>120</td> <td>30K - 3000K</td> <td>90 - 90+</td> <td>BK - Black</td> <td>0-EMG-LED-20W ⁶</td> <td></td> <td>SBF - Internal Slow Blow Fuse</td> </tr> <tr> <td>ELD010.1-LIN - EidoLED 0-10V</td> <td>277</td> <td>35K - 3500K</td> <td></td> <td>SI - Silver</td> <td>0-EMG-C</td> <td></td> <td>RIS - Radio Interf. Sensor</td> </tr> <tr> <td>DALL1 - EidoLED DALI Type 8</td> <td>347 ¹</td> <td>40K - 4000K</td> <td></td> <td>RAL - Custom ¹</td> <td>0-EMG-LED-G2-10W-SDT</td> <td></td> <td>BABAA - Build America Buy America Act</td> </tr> <tr> <td>ELDDMX.1 - EidoLED DMX</td> <td></td> <td>50K - 5000K</td> <td></td> <td></td> <td>GTD-U924</td> <td></td> <td>OCSSG - Aircraft Cable</td> </tr> <tr> <td>DIMTR - Triac & ELV ⁴</td> <td></td> <td></td> <td></td> <td></td> <td>- Ideal for use in 120V circuits, factory installed, specify for sections not exceeding 8ft in length - - 0-EMG-C: DMX control wire -</td> <td></td> <td>BKC - Black Cord</td> </tr> <tr> <td>DIM10-0-OFF - Program DIM10 to Off with linear dimming curve</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>SLC - Silver Cord</td> </tr> <tr> <td>POE - Power Over Ethernet</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>LUTRON - LUTRON (refer to last page)</td> </tr> <tr> <td>ELD010-LOG - EidoLED 0-10V with logarithmic dimming curve</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>ENLIGHTED - enlightened (refer to last page)</td> </tr> <tr> <td>BLE - Wireless Bluetooth Control</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>LEVITON - LEVITON (refer to last page)</td> </tr> <tr> <td>XSR - Xitanium SR Dimming</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>ENCELIUM - encellum (refer to last page)</td> </tr> <tr> <td>DIM10-AUX - 0-10V with Auxiliary Power</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PHILIPS - PHILIPS (refer to last page)</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>LEGRAND - legrand (refer to last page)</td> </tr> </tbody> </table>											DIMMING	VOLTAGE	CCT	CRI	FINISH	EMERGENCY	COLOR	OTHER OPTIONS	DIM10 - 0-10V Dimming	MVOLT	27K - 2700K	85 - 85	WH - White	0-EMG-LED-10W	refer to SoftSense material color chart for options example: GRN - Green	FBF - Internal Fast Blow Fuse	LUTH - Lutron HiLum	120	30K - 3000K	90 - 90+	BK - Black	0-EMG-LED-20W ⁶		SBF - Internal Slow Blow Fuse	ELD010.1-LIN - EidoLED 0-10V	277	35K - 3500K		SI - Silver	0-EMG-C		RIS - Radio Interf. Sensor	DALL1 - EidoLED DALI Type 8	347 ¹	40K - 4000K		RAL - Custom ¹	0-EMG-LED-G2-10W-SDT		BABAA - Build America Buy America Act	ELDDMX.1 - EidoLED DMX		50K - 5000K			GTD-U924		OCSSG - Aircraft Cable	DIMTR - Triac & ELV ⁴					- Ideal for use in 120V circuits, factory installed, specify for sections not exceeding 8ft in length - - 0-EMG-C: DMX control wire -		BKC - Black Cord	DIM10-0-OFF - Program DIM10 to Off with linear dimming curve							SLC - Silver Cord	POE - Power Over Ethernet							LUTRON - LUTRON (refer to last page)	ELD010-LOG - EidoLED 0-10V with logarithmic dimming curve							ENLIGHTED - enlightened (refer to last page)	BLE - Wireless Bluetooth Control							LEVITON - LEVITON (refer to last page)	XSR - Xitanium SR Dimming							ENCELIUM - encellum (refer to last page)	DIM10-AUX - 0-10V with Auxiliary Power							PHILIPS - PHILIPS (refer to last page)								LEGRAND - legrand (refer to last page)
DIMMING	VOLTAGE	CCT	CRI	FINISH	EMERGENCY	COLOR	OTHER OPTIONS																																																																																																																			
DIM10 - 0-10V Dimming	MVOLT	27K - 2700K	85 - 85	WH - White	0-EMG-LED-10W	refer to SoftSense material color chart for options example: GRN - Green	FBF - Internal Fast Blow Fuse																																																																																																																			
LUTH - Lutron HiLum	120	30K - 3000K	90 - 90+	BK - Black	0-EMG-LED-20W ⁶		SBF - Internal Slow Blow Fuse																																																																																																																			
ELD010.1-LIN - EidoLED 0-10V	277	35K - 3500K		SI - Silver	0-EMG-C		RIS - Radio Interf. Sensor																																																																																																																			
DALL1 - EidoLED DALI Type 8	347 ¹	40K - 4000K		RAL - Custom ¹	0-EMG-LED-G2-10W-SDT		BABAA - Build America Buy America Act																																																																																																																			
ELDDMX.1 - EidoLED DMX		50K - 5000K			GTD-U924		OCSSG - Aircraft Cable																																																																																																																			
DIMTR - Triac & ELV ⁴					- Ideal for use in 120V circuits, factory installed, specify for sections not exceeding 8ft in length - - 0-EMG-C: DMX control wire -		BKC - Black Cord																																																																																																																			
DIM10-0-OFF - Program DIM10 to Off with linear dimming curve							SLC - Silver Cord																																																																																																																			
POE - Power Over Ethernet							LUTRON - LUTRON (refer to last page)																																																																																																																			
ELD010-LOG - EidoLED 0-10V with logarithmic dimming curve							ENLIGHTED - enlightened (refer to last page)																																																																																																																			
BLE - Wireless Bluetooth Control							LEVITON - LEVITON (refer to last page)																																																																																																																			
XSR - Xitanium SR Dimming							ENCELIUM - encellum (refer to last page)																																																																																																																			
DIM10-AUX - 0-10V with Auxiliary Power							PHILIPS - PHILIPS (refer to last page)																																																																																																																			
							LEGRAND - legrand (refer to last page)																																																																																																																			

¹ Consult Factory

² No Light Source, please skip to material color




³ High Performance only available with 3000K, 3500K, and 4000K

⁴ Available only in 120V





⁵ Length indicates fixture length without endcaps and acoustic wrapping

⁶ only available with 4 inch width option

DIMENSIONS - OLS-D-STANZA-SOFT- 2 inch

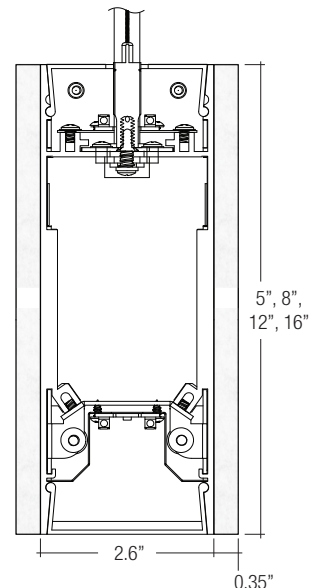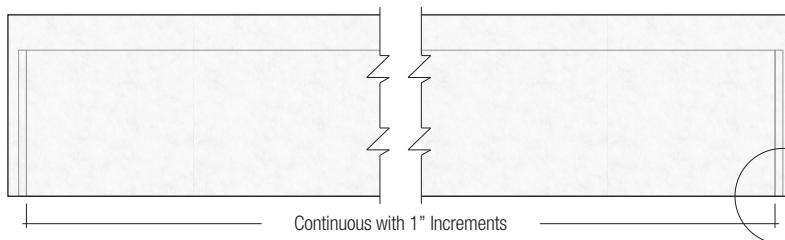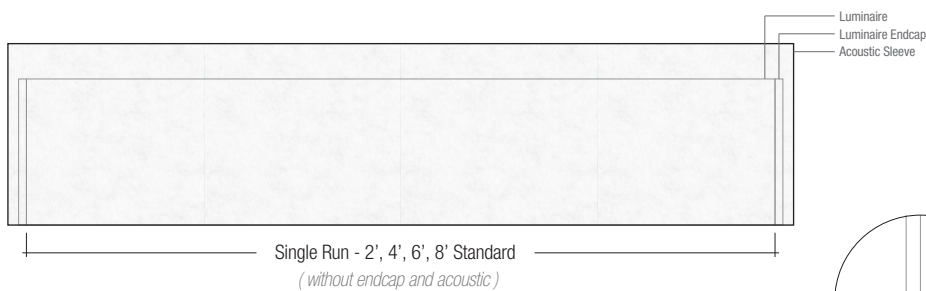

DIMENSIONS - OLS-D-STANZA-SOFT- 4 inch

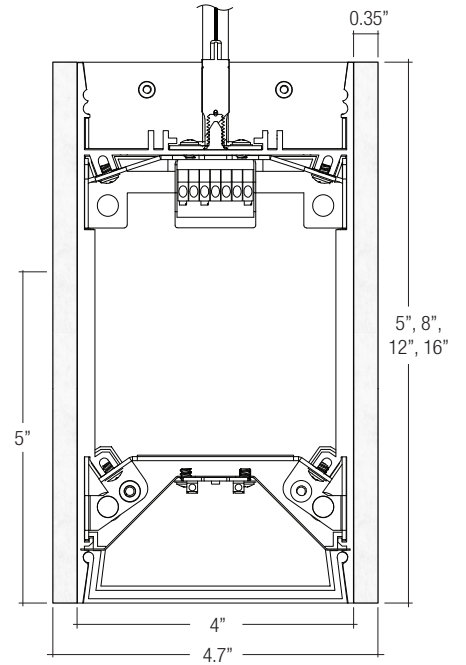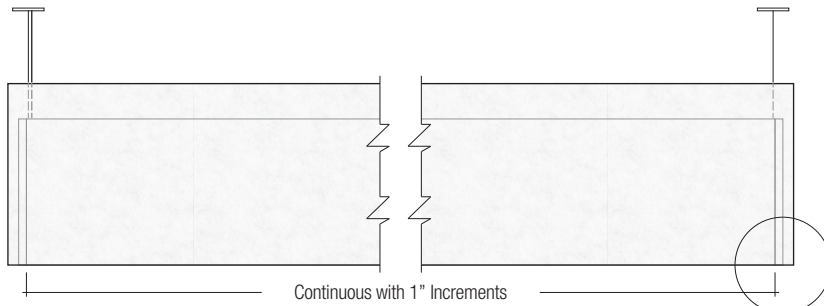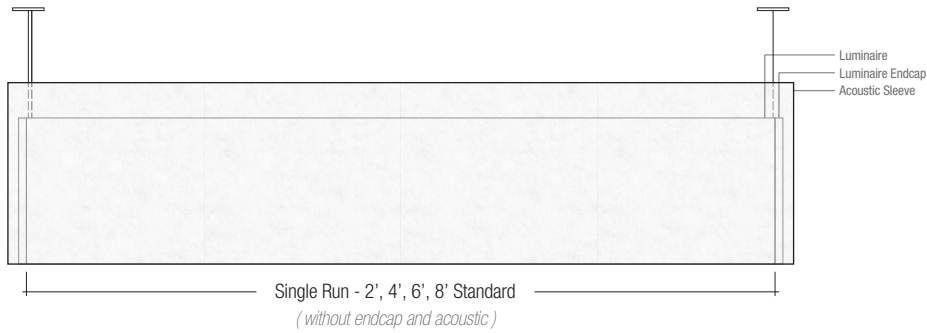

LUMEN DETAILS


Based on 4000K, 90+ CRI.

Actual wattage may vary +/- 5%




DIRECT / INDIRECT HIGH PERFORMANCE	
LUMENS / FT	WATTS / FT
2000	14.1
1500	10.3
1250	8.5
1000	7.3
750	5.5
500	3.5

DIRECT / INDIRECT STANDARD	
LUMENS / FT	WATTS / FT
2000	17.5
1500	12.7
1250	10.5
1000	8.2
750	6.5
500	4.5




DIRECT / INDIRECT DISTRIBUTION PATTERNS

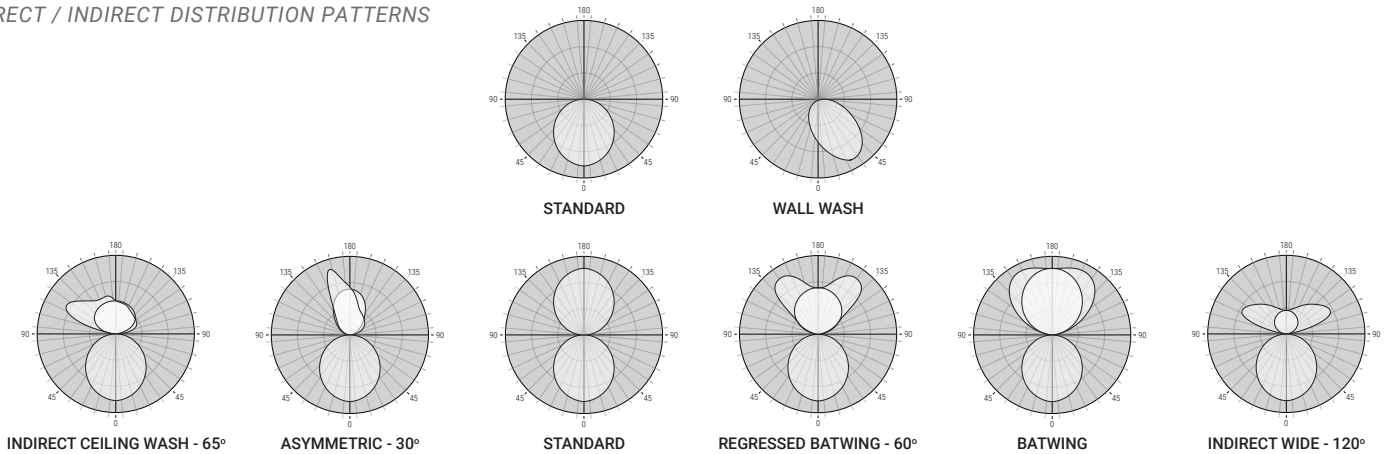



Ellipse Louver

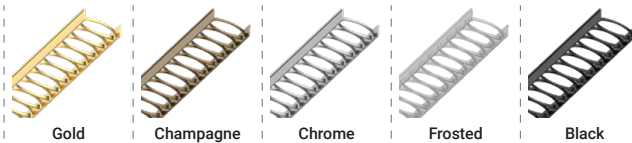



Cross Hatched Louver

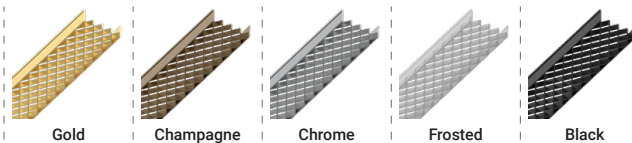

Hexagonal Louver

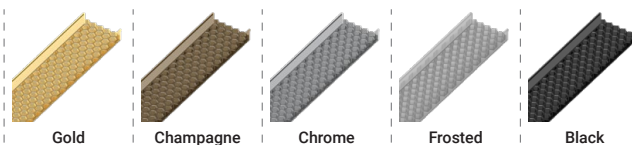

Blade Louver

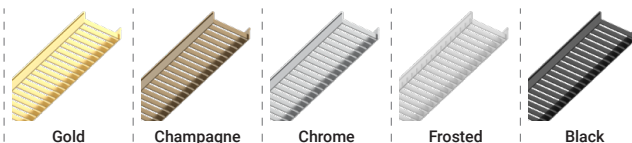

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)



All panels ASTM E84-16 Fire Rated

STANDARD PRINTS

Panel Thickness: 8.5 mm / 0.34" (+/- 0.5 mm)



prints shown at 12% scale

Declare.
Label Pending




quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A

*** OLS-DI-LED-2-S-4-D1000L-U1000L-DIM10-MVOLT-40K-85**

TEST NO.: **EL081815**

INPUT WATTS: **76** LUMENS: **8326** CRI: **85** EFFICACY: **110** CCT: **4000K**

Candle Power Distribution (Candelas)

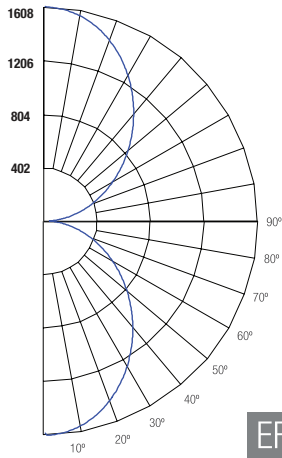

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	1199.64	N.A.	14.40
0-40°	1924.15	N.A.	23.10
0-60°	3288.36	N.A.	39.50
0-90°	4163.18	N.A.	50.00
0-180°	8326.37	N.A.	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	19753	20906	22163
45°	18172	19416	20850
55°	16650	17872	19306
65°	15376	16393	17640
75°	15109	15772	16893

Candela Tabulation

	0	45	90	180
0	1587.911	1587.911	1587.911	1587.911
25	1322.160	1355.780	1389.000	1329.110
45	883.230	934.760	990.970	894.720
65	444.950	477.600	515.930	456.560
85	83.270	86.920	93.100	91.350
90	33.110	28.640	20.360	33.110
130	782.340	825.120	878.470	769.900
145	1119.860	1160.660	1205.750	1110.310
165	1496.030	1508.430	1521.900	1493.220
175	1588.610	1588.750	1591.100	1590.300
180	1608.340	1608.340	1608.340	1608.340

Spacing Criteria

0-180	: N.A.
90-270	: N.A.
Diagonal	: N.A.

EFFICACY: 110 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	81	89	86	90	86	83	80	73	70	68	61	59	57	49	48	47	42
2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	43	41	39	35
3	81	71	64	58	74	66	60	54	56	51	47	47	43	40	38	36	34	29
4	74	63	55	49	68	59	52	46	50	44	40	42	38	34	34	31	29	25
5	68	56	48	42	62	52	45	40	45	39	35	37	33	30	31	28	25	22
6	63	50	42	37	58	47	40	34	40	34	30	34	30	26	28	25	22	19
7	58	46	38	32	53	42	35	30	36	31	27	31	26	23	26	22	20	17
8	54	41	34	28	49	39	32	27	33	28	24	28	24	21	23	20	18	15
9	50	38	30	25	46	35	28	24	30	25	21	26	22	19	22	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	13

RC - Ceiling Cavity Reflectance


RW - Wall Reflectance

*** OLS-DI-LED-2-S-4-D1000L-WW-U1000L-WW-DIM10-MVOLT-40K-85**

TEST NO.: **EL081815**

INPUT WATTS: **76.3** LUMENS: **8278** CRI: **85** EFFICACY: **108** CCT: **4000K**

Candle Power Distribution (Candelas)

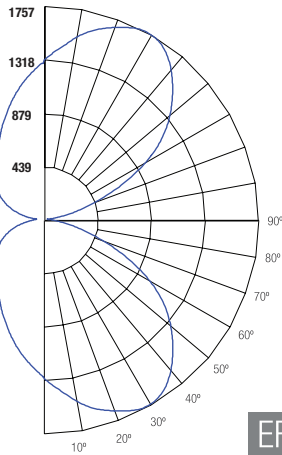

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	1047.28	12.70	12.70
0-40°	1752.00	21.20	21.20
0-60°	3199.88	38.70	38.70
0-90°	4139.19	50.10	50.00
0-180°	8278.37	100.10	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	40999	39838	22374
45°	40607	40193	20522
55°	34997	39001	18302
65°	24298	34384	15022
75°	17505	27434	10016

Candela Tabulation

	0	45	90	180
0	1292.846	1292.846	1292.846	1292.846
25	1734.480	1558.810	1141.660	807.150
45	1509.680	1466.930	823.870	537.300
65	770.200	888.320	402.780	364.300
85	79.450	124.510	202.470	226.560
90	35.190	45.690	45.460	89.280
130	1372.740	1345.170	8.080	55.390
145	1720.990	1590.350	748.010	498.840
165	1606.860	1501.800	1029.250	645.640
175	1398.140	1368.520	1253.860	999.930
180	1277.240	1277.240	1296.580	1195.710

Spacing Criteria

0-180	: N.A.
90-270	: N.A.
Diagonal	: N.A.

EFFICACY: 108 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	81	89	86	90	86	83	79	73	70	68	60	59	57	49	48	47	41
2	89	81	75	69	81	75	69	65	63	59	56	53	50	47	43	41	39	34
3	81	71	63	57	74	66	59	54	56	51	46	46	43	39	38	35	33	29
4	74	62	54	48	67	58	51	45	49	44	39	41	37	33	33	30	28	24
5	67	55	47	41	62	51	44	39	44	38	34	37	32	29	30	27	24	21
6	62	50	41	35	57	46	39	33	39	33	29	33	28	25	27	24	21	18
7	57	45	37	31	53	42	34	29	36	30	26	30	25	22	25	21	19	16
8	53	40	33	27	49	38	31	26	32	27	23	27	23	20	23	19	17	14
9	49	37	29	24	45	34	27	23	30	24	20	25	21	17	21	17	15	13
10	46	34	26	22	42	31	25	20	27	22	18	23	19	16	19	16	13	11

RC - Ceiling Cavity Reflectance


RW - Wall Reflectance

*** OLS-DI-LED-4-S-4-D1000L-U1000L-BW-DIM10-MVOLT-40K-85**

TEST NO.: **EL081815**

INPUT WATTS: **76.6** LUMENS: **8335** CRI: **85** EFFICACY: **109** CCT: **4000K**

Candle Power Distribution (Candelas)

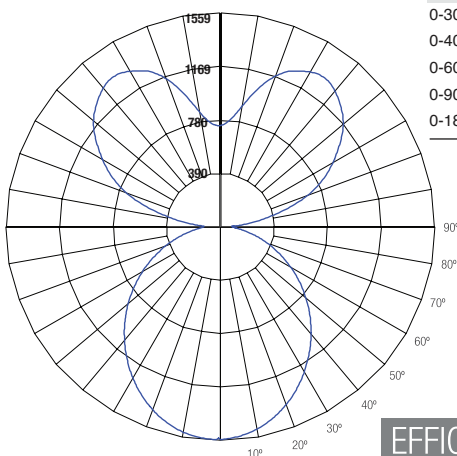

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	1180.17	14.20	14.20
0-40°	1907.46	22.90	22.90
0-60°	3310.83	39.70	39.70
0-90°	4253.63	51.00	51.00
0-180°	8335.08	100.00	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	10688	10873	11085
45°	10078	10301	10437
55°	9403	9612	9625
65°	8838	8880	8527
75°	11366	9974	7462

Candela Tabulation

	0	45	90	180
0	1546.766	1546.766	1546.766	1546.766
25	1317.980	1327.740	1345.400	1335.830
45	927.660	943.690	962.120	942.630
65	487.770	498.600	499.280	494.920
85	121.590	106.700	79.830	125.340
90	96.010	66.390	9.980	104.650
130	1204.320	1025.170	472.100	1168.810
145	1370.510	1118.380	592.150	1325.560
165	1069.610	898.090	708.870	1020.070
175	778.050	765.690	747.400	767.760
180	747.400	747.400	804.170	747.400

Spacing Criteria

0-180	: N.A.
90-270	: N.A.
Diagonal	: N.A.

EFFICACY: 109 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	93	89	86	90	86	83	80	73	71	68	61	59	58	50	49	47	42
2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	44	42	40	35
3	81	71	64	58	74	66	59	54	56	51	47	47	43	40	39	36	34	30
4	74	63	55	49	68	58	51	46	50	44	40	42	38	34	34	31	29	25
5	68	56	48	42	62	52	45	39	45	39	34	36	33	30	31	28	25	22
6	62	50	42	36	57	47	39	34	40	34	30	34	29	26	28	25	22	19
7	58	45	37	32	53	42	35	30	36	31	26	31	26	23	26	22	20	17
8	54	41	33	28	49	38	31	26	33	27	23	28	24	20	24	20	18	15
9	50	38	30	25	46	35	28	24	30	25	21	26	22	18	22	18	16	14
10	47	34	27	22	43	32	26	21	28	23	19	24	20	17	20	17	14	12

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

ANSI/IES TM-30-18 Color Rendition Report

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4039

y 0.3935

u' 0.2337







v' 0.5122

CIE 13.3-1995
(CRI)

R_a 91

R_g 58

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

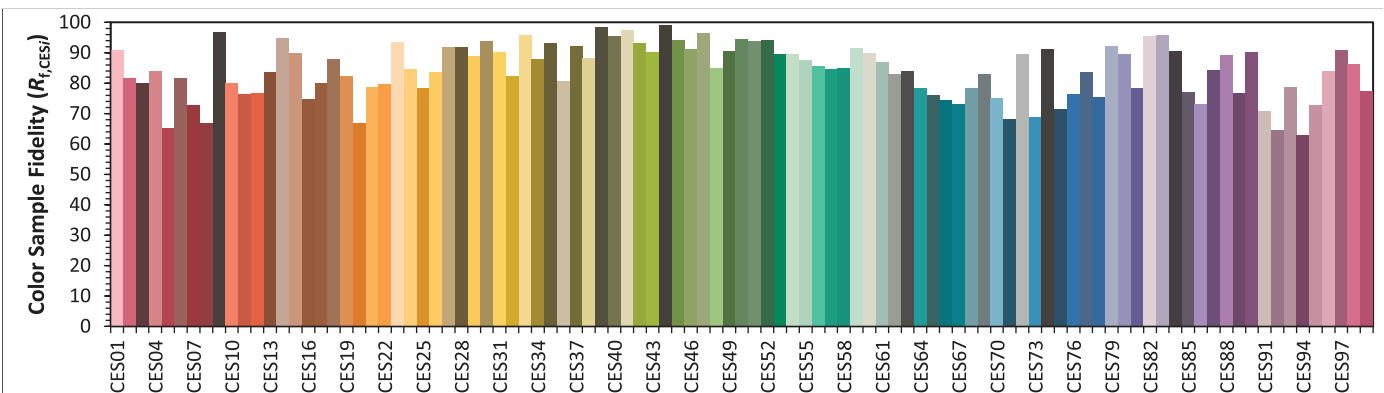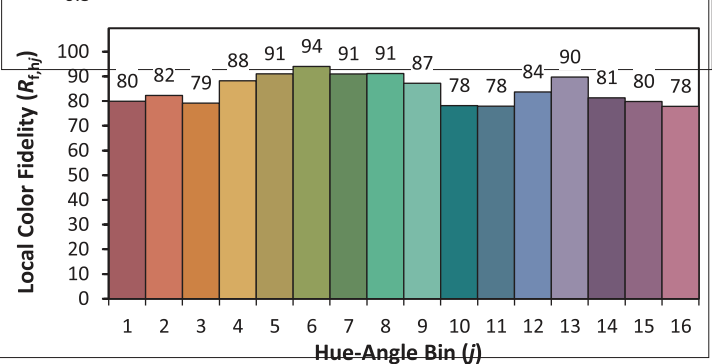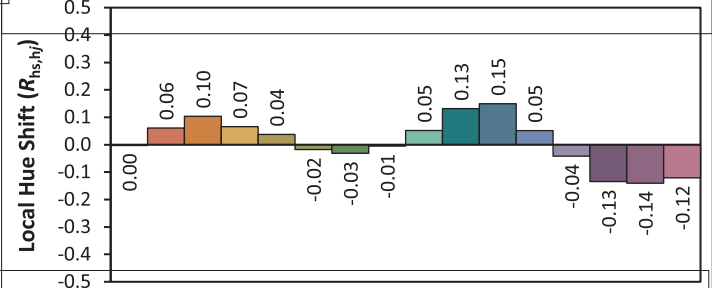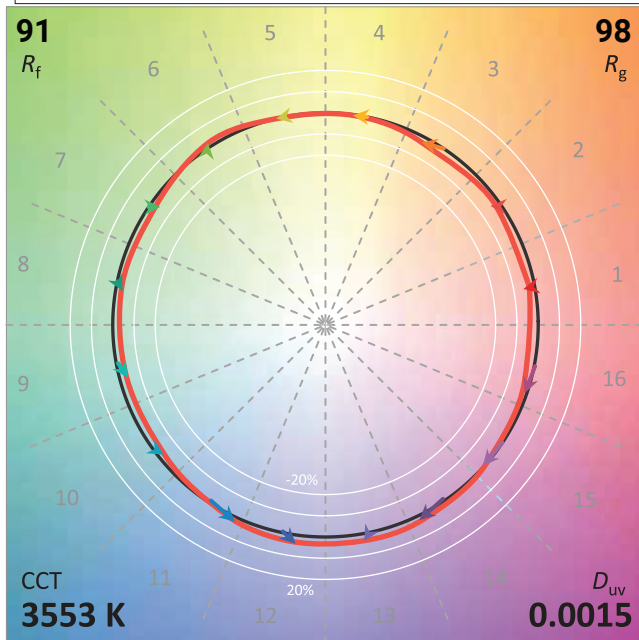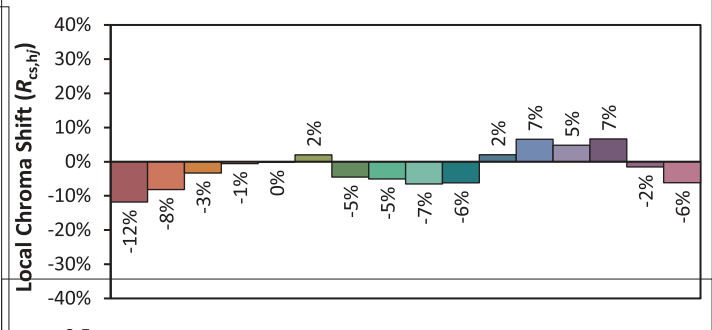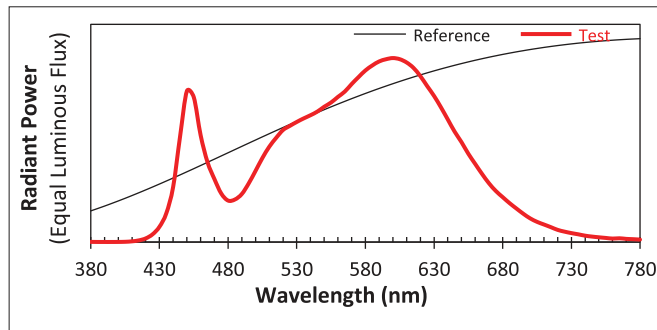

- 1 - Luminaire will be shipped with powerpacks pre-installed, ready to be integrated to designated control systems.
- 2 - Luminaire will be shipped with sensors pre-installed allowing for individual luminaire control and ready to be integrated to designated control systems
- 3 - Luminaire will be shipped with sensors to be remotely installed on the ceiling and ready to be integrated to designated control systems

BRAND							
CONTROL UNIT	☐ FCJS-010 Lutron Vive 0-10V Individual Pow Pak (Luminare is shipped Vive Enabled) ¹⁴ ☐ FCJS-ECO Lutron Vive Eco-system Pow Pak (Luminare is shipped Vive Enabled) ☐ A-WN-D01-RF-WH Athena wireless node (RF only) (White) ☐ A-WN-D01-OCC-WH Athena wireless node with sensor (White)	☐ CU-4E-FMH Fixture Mount Control Unit ¹⁵	☐ ZL027 -NOW Intellect Power Control Module ¹⁶ ☐ ZL027 -DLE Intellect Power Control Module ¹⁶	☐ EN-WCM2-ZB-DR Wireless Control Module ¹⁷ ☐ EN-ALC-ZB-BK-DR Wireless Area Lighting Control Module ¹⁷	☐ XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver ¹⁸ ☐ LMFC-011 ON/OFF/0-10V dimming fixture controller ¹⁹ ☐ FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ¹⁹ ☐ LMFS-601 Integrated Fixture Sensor & Controller	☐ LMFC-011 ON/OFF/0-10V dimming fixture controller ¹⁹ ☐ FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ¹⁹ ☐ LMFS-601 Integrated Fixture Sensor & Controller	☐ NXFM-1R2D-O-UNV NX Fixture Module, Offset, 1 Relay, 2 0-10V Dimming Channels, 120-347VAC, Blue
INTEGRATED OCCUPANCY & DAYLIGHT SENSOR	☐ DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/Daylight Sensing ²	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Independent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be Specified with CU-4E-FMH Control Unit) ²	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ² ☐ ZL00J-DOW Intellect Intelligent Fixture Control System ²	☐ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ ZBHA-CLM-DIM-ENC Connected Lighting Module DIM ²	☐ SNS 212 EasyAir Daylight and Occupancy sensor ☐ SNS300 SNS300 for networks ²	☐ FD-301 Fixture integrated Daylight Dimming Sensor ² ☐ FS-205 Fixture integrated passive infrared occupancy sensor ²	☐ NXRM HubbNETTM Radio Module ☐ NXSMP2-OMNI Integrated Fixture Sensor & Controller ☐ NXSMP2-LMI Integrated Fixture Sensor & Controller
*WIRELESS OCCUPANCY SENSOR	☐ LRF2-OCR2B-P-WH Ceiling mount 360° ,occupancy/vacancy sensor ³	N/A	N/A	☐ EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³	☐ NXSMP2-SMI NX Slide Mount Indoor Sensor Module
*WIRELESS DAYLIGHT SENSOR	☐ LRF2-DCRB-WH Ceiling-mount daylight sensor ³	N/A	N/A	☐ EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMLS-400 Single zone switching and dimming digital photosensor ³	☐ LUXSTATLS Luxstat Light Sensor for Luxstat Control Modules, 3 to 6000 FC
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Independent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be specified with CU-4E-FMH Control Unit) ³	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ☐ ZL00J-DOW Intellect Intelligent Fixture Control System (Must be specified with ZL027-NOW and ZL00J-DOW Control unit) ³	☐ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ ZBHA-CLM-DIM-ENC Connected Lighting Module DIM (Must be specified with EN-WCM2-ZB-DR or EN-ALC-ZB-BK-DR Control Unit) ³	☐ SNS212-CMP SNS-212 for Grouping ³	N/A	☐ NXSMDT Indoor Ceiling Mount Sensor - OMNI
ACCESSORIES	N/A	☐ TMC-SU-5E Tile Mount Carrier ☐ CBL-5E-CU4-30N 30 inch Sensor cable for CU-4 and IoT Ready ☐ CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A	N/A
NOTES	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON Intellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.	N/A