



OLS-IND-LED

LED ARCHITECTURAL INDIRECT
LINEAR SYSTEM

CALCULATED
L70
LIFETIME
110,000 HRS

CALCULATED
L85
LIFETIME
65,000 HRS

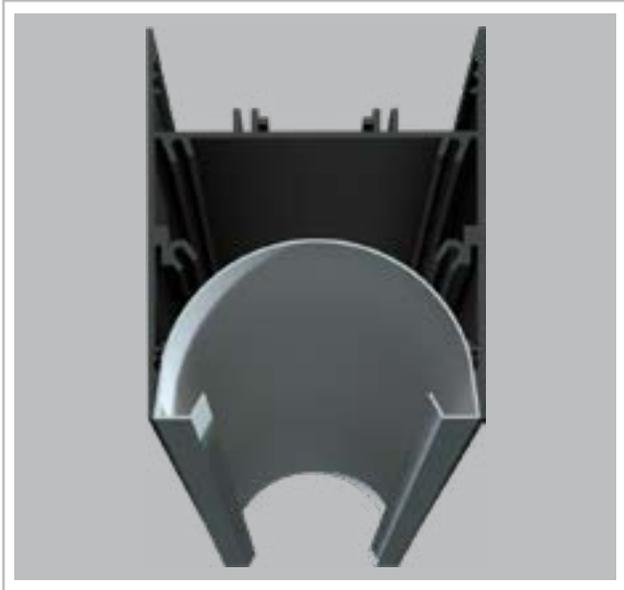

All Corners are fully illuminated, and are shipped pre-fabricated to provide seamless installation of creative designs.

ALSO AVAILABLE IN SURFACE LINEAR DIRECT SYSTEM, RECESSED LINEAR DIRECT SYSTEM, WALL MOUNT LINEAR DIRECT/INDIRECT SYSTEM

APPLICATION: Ambient lighting for glare-free, smooth illumination ideal for institutional, commercial and retail application.

PRODUCT FEATURES:

- 500L, 750L lumens per ft. downlight
- Standard length 2', 4' and 8'
- Aperture width is 4"
- Rigid aluminum extrusion made out of T6063-T5 aluminum, die cast aluminum end caps
- Optical system offers high efficiency LED light that passes through a smooth acrylic lens for optimal distribution patterns, thus creating a glare-free and even distribution for your application
- Life tested to 50,000 hours of operation to L70
- Tested to LM-79 and LM-80 standards
- Full ability to tandem mount for continuous run application complete with easy quick connects

PERFORMANCE: The light engines found in the OLS-D are rated at 85+ CRI and are available in multiple CCTs: 3000K, 3500K, 4000K and 5000K. Rated and tested to LM-79 and LM-80 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

OPTICS - Fabricated of 20 gauge aluminum. Post painted finish with 95% reflective premium paint.

DIFFUSER - Smooth white frosted acrylic lens for glare free light and even distribution. Precision cut, snap in design. 4" lens 3.858" width 2" lens 2.361" width.

FABRICATION - Available in 100% downlight configuration. Available in 2" and 4" aperture width. Rigid design made with extruded aluminum ensures longevity and endurance.

FINISH - Aluminum electrostatic painted in White, Silver or custom colors.

MOUNTING - Comes standard with adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings.

ENDCAPS - Rigid aluminum extrusion made out of T6063-T5 aluminum, diecast end caps.

STANDARD LENGTHS - All luminaires are supplied in nominal lengths to ensure even illumination. Runs and configurations are available in app. 2', 4' and 8' increments.

CRM INSTALLATION - For continuous row mounting, the first fixture in the row will always be the power supplies feed. After plugging in the male and female harnesses, which are supplied with each fixture, they will easily slid together, then secured with two screws from opposite direction in the connecting brackets. This allows for fixtures to be continuously connected with only removing the lenses. There is no need to remove any other parts in the fixture to install the continuous run.

ELECTRICAL - Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and Female 18-gauge 6 wire plug connectors are included with every fixture to allow for simple hassle-free continuous wiring. Each fixture must be installed male to female.

OPTIONS - Fixtures may be shipped pre-installed with daylight harvesting controls, occupancy sensors, and/or power pack. Available manufacturer options include Lutron, Leviton, Wattstopper, EnOcean, Enlighted, Philips and others. **Consult factory for details.**

QUALITY CONTROL - Every fixture is rigorously tested by our QC Department before shipping.

LISTING: c-UL-us - listed for Damp location

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

OUR WORD - Our LED system is Life tested to ensure light output of L70 up to 110,000 hrs and L85 up to 65,000 hrs and carries a five-year carefree warranty for parts and components. (Labor not included)

Ordering Information: OLS-IND-LED-4-R-2-500L-DIM10-MVOLT-35K-85

SERIES	WIDTH	MOUNTING	LENGTH	LUMENS	DIMMING	VOLTAGE	CCT/TECHNOLOGY	CRI	FINISH	EMERGENCY
OLS-IND-LED Oracle Indirect LED Linear	4 - 4"	R - Recessed Flat Trim D - Pendant Mount	2 - 2' 4 - 4' 8 - 8'	500L - per ft. 750L - per ft.	DIM10 - 0-10V Dimming (Compatible with Lutron GRAFIK Eye,Vive) DIMST - Step Dimming LUTH - Lutron HiLum LUT2W - Lutron 2- Wire LUTFTB - Lutron Fade to Black ELDO10.1 - EldoLED 0-10V ELDODALI - EldoLED DALI Type 8 ELDODMX - EldoLED DMX	MVOLT 347* <small>* Consult factory for details</small>	HIGH PERFORMANCE 30K 35K 40K 50K	85 90	WH - White SI - Silver BK - Black RAL - Consult factory	O-EMG-LED