


CUSTOM COLORS

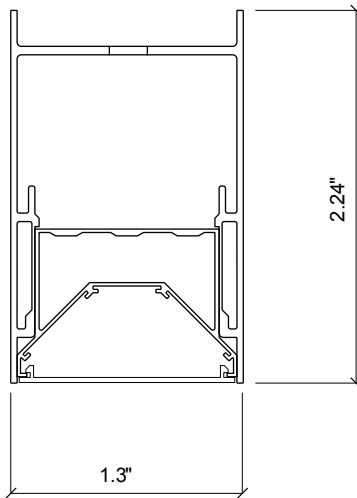

**DIRECT**

LUMENS/FT	WATTS/FT
1000	10 W
750	7 W
500	5 W


**FEATURES**

The Architectural LED Suspended Linear is "Performance Designed for You", combining the ultimate in flexibility and creativity, with continuous, uniform and glare-free illumination. Available in any combination of direct, indirect, and wall wash, with continuous mounting and fully illuminated corners for a seamless connection from luminaire to luminaire, in a variety of formed angles and shapes. Be inspired to create a long-lasting impression with a unique design that complements corporate offices, educational, commercial, and retail spaces.


LUMENS PER FOOT	Direct 500, 750, 1000 Lumen Per Foot
CCT & DYNAMIC PLATFORMS	30K, 35K, 40K
CRI	85+ Standard
COLOR QUALITY	3 Step MacAdam Ellipses
WIDTHS	1.3"
LENGTHS	2', 4', 8'
DISTRIBUTION PATTERNS	Diffuser, Louver, Micro Linear Distribution, Frosted Block Diffuser
CONFIGURATION PATTERNS & LENGTHS	Continuous Run, L-Shape, T-Shape, X-Shape, Y-Shape, V-Shape
MOUNTING	Suspended, Ceiling mount, Wall mount, Recessed
FINISH	WH (White), BK (Black), SI (Silver), Custom RAL
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10)
REMOTE EMERGENCY	10W - Up to 1000L Output (Bodine BSL310) 20W - Up to 2000L Output (Bodine BSL20)
LIFETIME	L85 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21




Distribution Pattern:  
Direct: Diffuser




Distribution Pattern:  
Direct: Frosted Block Diffuser



Distribution Pattern:  
Direct: Louver



Distribution Pattern:  
Direct: Micro Linear Distribution



**OPTICS & PERFORMANCE**

Fabricated from 20-gauge aluminum, with mitered corners, and post-painted with 95% reflective premium paint. The optical system delivers high efficiency LED light that passes through a high quality acrylic lens for optimal distribution patterns, creating a glare-free and even distribution. Distributions include It offers a selection of professional lens such as diffuser, louver, micro reflector and convex to meet your different requires. with zero light leakage.

**CONSTRUCTION**

One-piece rigid aluminum extrusion, made of T6063-T5 aluminum, with cast aluminum end caps. A precision cut, smooth white extruded frosted lens with snap in design attaches firmly into the grooves of the body and can be easily removed for access to the driver and LED boards.

**DISTRIBUTION PATTERNS & DIFFUSER**

**Diffuse Distribution:** A high-quality, smooth white frosted efficient acrylic lens is shipped standard for optimal distribution patterns, for most applications, and provides glare-free, even illumination.

**Frosted Block Distribution:** 0.3" Drop Down Lens made of highly efficient acrylic. Available with a solid endcap or an endcap with a diffuse filler to continue the luminous aesthetic.

**Micro Linear Distribution:** crafted to refract and reflect beams with great precision, effectively keeping glare to a minimum while delivering light of exceptional quality and visual comfort.

**Louver:** reduce perceived fixture brightness, reducing glare and resulting in improved visual comfort.

**SUPPORT CABLE/FEED**

Standard suspension is conductive feed/suspension cable. The adjustable power cable comes in a standard 5' length. A 5-conductor cable is standard for delivering independent, uplight, downlight, or combined up/downlight.

A 6-conductor cable for emergency power. Field adjustable length. Max. Support every 8 feet.2 and 5 inches canopy round and square and 5 inch designed for power cable.

**CRM INSTALLATION**

For continuous row mounting, the first luminaire in the row will always be the power supply feed. After plugging in the male and female harnesses, which are supplied with each luminaire, they will easily slide together, then secured with two screws from opposite directions in the connecting brackets. This allows the luminaires to be continuously connected by only removing the lenses. There is no need to remove any other parts in the fixture to install the continuous run.

**DRIVER ELECTRICAL INFORMATION**

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and Female 18-gauge 6 wire plug connectors are included with every luminaire to allow for simple hassle-free continuous wiring. Each luminaire must be installed male to female.

**DIMMING & DRIVER INFORMATION**

**DIM10** - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277

**WARRANTY**

Five-year warranty for parts and components. (Labor not included)

**LISTINGS**

c-UL-us - Listed for Feed Through Wiring.  
All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory. Listed for DLC, California Title 24 compliant.

Example: **OMLS-D-LED-1-L-D500L-DF-DIM10-MVOLT-35K-85**

**OMLS-D-LED**

**SERIES**  
OMLS-D-LED  
-Oracle Suspended  
LED Linear

**WIDTH**  
1 - 1.3"

**SHAPE**  
S - Single Unit  
CR - Continuous Run  
L - L-Shape  
X - X-Shape  
Y - Y-Shape  
V - V-Shape

Single Run

2, 4 OR 8'

Cont. Run

XX . YY\*

TOTAL RUN

Rectangle

W L

WIDTH

LENGTH

Custom

**DIRECT LUMENS**  
D500L - per ft.  
D750L - per ft.  
D1000L - per ft.

**DOWN DISTRIBUTION**  
DF - Diffuser  
MLD - Micro Linear Distribution  
LVR - Louver  
BF - Frosted Block Diffuser

**DIMMING**  
DIM10 - 0-10V Dimming

**VOLTAGE**  
120  
277  
MVOLT

**CCT**  
30K  
35K  
40K

**CRI**  
85

**FINISH**  
WH - White  
SI - Silver  
BK - Black  
RAL - Consult factory

**REMOTE EMERGENCY**  
0-EMG-LED-10W  
0-EMG-LED-20W  
Contact the factory for details.  
Remote mounted installation


**OTHER OPTIONS**  
FBF - Internal Fast Blow Fuse  
SBF - Internal Slow Blow Fuse  
RIS - Radio Interf. Sensor  
USA - Made in America Compliance  
2R- 2inch Round None Feed  
2S- 2inch Square None Feed  
5R- 5inch Round (Designed for power cable)  
5S- 5inch Square (Designed for power cable)

**DRAW YOUR CUSTOM SHAPE HERE**

**OMLS-D-LED-1-S-4-D750L-BF-DIM10-MVOLT-35K-85**

TEST NO.: **EL12162217**

INPUT WATTS: **40.9** LUMENS: **3425** EFFICACY: **84** BEAM ANGLE: **135** SPACING CRITERIA: **1.37**



**CANDELA TABLE**

	0°	90°
0°	833	833
10°	830	822
20°	813	777
30°	773	708
40°	708	616
50°	622	505
60°	518	379
70°	406	246
80°	295	118
90°	197	8

**LUMINANCE (cd/sq.m)**

	0.00°	90.00°
0.00°	4481	4481
45.00°	5078	4284
55.00°	5367	4157
65.00°	5892	3981
75.00°	7264	3754
85.00°	15024	3817

**LUMENS PER ZONE**

ZONE	LUMENS
0° - 10°	79
10° - 20°	230
20° - 30°	357
30° - 40°	444
40° - 50°	480
50° - 60°	462
60° - 70°	394
70° - 80°	291
80° - 90°	180

**ZONAL LUMEN SUMMARY**

ZONE	UMENS	% LUMINAIRE
0° - 20°	309	9%
0° - 30°	666	19%
0° - 40°	1110	32%
0° - 60°	2053	60%
0° - 80°	2737	80%
0° - 90°	2917	85%

**CONE OF LIGHT**

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°
6.0 ft	23.1 fc	29.1 ft	18.8 ft
8.0 ft	13.0 fc	38.7 ft	25.1 ft
10.0 ft	8.3 fc	48.4 ft	31.3 ft
12.0 ft	5.8 fc	58.1 ft	37.6 ft
14.0 ft	4.2 fc	67.8 ft	43.9 ft
16.0 ft	3.3 fc	77.5 ft	50.1 ft
18.0 ft	2.6 fc	87.2 ft	56.4 ft
20.0 ft	2.1 fc	96.9 ft	62.7 ft


**INDOOR COEFFICIENTS OF UTILIZATION**

pf	pc	20%																0%	
		80%				70%				50%				30%					
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	116	116	116	116	111	111	111	111	103	103	103	95	95	95	88	88	88	85	
1	103	98	93	88	99	94	90	86	87	83	80	81	78	75	75	72	70	67	
2	93	84	77	70	89	81	74	68	75	69	65	69	65	61	64	61	57	54	
3	85	73	65	58	81	71	63	56	65	59	53	61	55	50	56	52	48	45	
4	77	64	55	48	74	62	54	47	58	50	45	54	48	43	50	45	40	38	
5	71	57	48	41	67	55	47	40	51	44	38	48	42	37	45	39	35	32	
6	65	51	42	35	62	50	41	35	46	39	33	43	37	32	40	35	30	28	
7	60	46	37	31	57	45	36	30	42	35	29	39	33	28	37	31	27	25	
8	56	42	33	27	53	41	33	27	38	31	26	36	30	25	34	28	24	22	
9	52	38	30	25	50	37	29	24	35	28	23	33	27	22	31	25	21	19	
10	49	35	27	22	47	34	27	22	32	26	21	30	24	20	29	23	19	18	

**OMLS-D-LED-1-S-4-D750L-DF-DIM10-MVOLT-35K-85**

TEST NO.: **EL12162219**

INPUT WATTS: **39.5** LUMENS: **2935** EFFICACY: **74** BEAM ANGLE: **111** SPACING CRITERIA: **1.18**



**CANDELA TABLE**

	0°	90°
0°	1000	1000
10°	965	1000
20°	895	955
30°	796	889
40°	672	788
50°	529	660
60°	377	508
70°	211	341
80°	61	171
90°	2	30

**LUMINANCE (cd/sq.m)**

	0.00°	90.00°
0.00°	5382	5382
45.00°	4586	5524
55.00°	4236	5507
65.00°	3735	5436
75.00°	2761	5317
85.00°	317	5836

**LUMENS PER ZONE**

ZONE	LUMENS
0° - 10°	95
10° - 20°	271
20° - 30°	411
30° - 40°	499
40° - 50°	518
50° - 60°	470
60° - 70°	362
70° - 80°	210
80° - 90°	63

**ZONAL LUMEN SUMMARY**

ZONE	UMENS	% LUMINAIRE
0° - 20°	365	12%
0° - 30°	777	26%
0° - 40°	1275	43%
0° - 60°	2264	77%
0° - 80°	2837	97%
0° - 90°	2900	99%

**CONE OF LIGHT**

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°
6.0 ft	27.8 fc	17.9 ft	18.9 ft
8.0 ft	15.6 fc	23.8 ft	25.2 ft
10.0 ft	10.0 fc	29.8 ft	31.5 ft
12.0 ft	6.9 fc	35.8 ft	37.8 ft
14.0 ft	5.1 fc	41.7 ft	44.1 ft
16.0 ft	3.9 fc	47.7 ft	50.5 ft
18.0 ft	3.1 fc	53.7 ft	56.8 ft
20.0 ft	2.5 fc	59.6 ft	63.1 ft

**INDOOR COEFFICIENTS OF UTILIZATION**


pf	pc	20%																0%	
		80%				70%				50%				30%					
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99	
1	108	103	99	95	105	101	97	93	96	93	90	92	90	87	89	86	84	82	
2	98	90	83	77	95	88	82	76	84	79	74	81	76	72	77	74	70	68	
3	89	79	71	64	87	77	69	63	74	67	62	71	65	61	68	64	60	57	
4	82	70	61	54	79	68	60	54	66	58	53	63	57	52	61	55	51	49	
5	75	62	53	46	73	61	52	46	59	51	45	57	50	45	55	49	44	42	
6	69	56	47	40	67	55	46	40	53	45	40	51	44	39	49	44	39	37	
7	64	51	42	36	63	50	41	35	48	41	35	47	40	35	45	39	34	32	
8	60	46	38	32	58	45	37	32	44	37	31	43	36	31	41	35	31	29	
9	56	42	34	29	54	42	34	28	41	33	28	39	33	28	38	32	28	26	
10	52	39	31	26	51	39	31	26	37	30	26	36	30	25	35	30	25	23	

**OMLS-D-LED-1-S-4-D750L-LVR-DIM10-MVOLT-35K-85**

TEST NO.: **EL12162218**

INPUT WATTS: **40.6** LUMENS: **2618** EFFICACY: **64** BEAM ANGLE: **60** SPACING CRITERIA: **0.89 x 0.89**

**CANDELA DISTRIBUTION**



**CANDELA TABLE**

	0°	90°
0°	2035	2035
10°	1844	1890
20°	1525	1515
30°	1062	1069
40°	634	586
50°	416	295
60°	260	198
70°	139	119
80°	57	55
90°	1	1

**LUMINANCE (cd/sq.m)**

	0.00°	90.00°
0.00°	10954	10954
10°	3882	3003
20°	3148	2286
30°	2462	1988
40°	1996	1788
50°	1355	1573

**LUMENS PER ZONE**

ZONE	LUMENS
0° - 10°	187
10° - 20°	468
20° - 30°	568
30° - 40°	495
40° - 50°	341
50° - 60°	243
60° - 70°	165
70° - 80°	93
80° - 90°	26

**ZONAL LUMEN SUMMARY**

ZONE	UMENS	% LUMINAIRE
0° - 20°	655	25%
0° - 30°	1224	47%
0° - 40°	1719	66%
0° - 60°	2303	88%
0° - 80°	2561	98%
0° - 90°	2587	99%

**CONE OF LIGHT**

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°
6.0 ft	56.5 fc	6.9 ft	7.2 ft
8.0 ft	31.8 fc	9.2 ft	9.6 ft
10.0 ft	20.4 fc	11.5 ft	12.0 ft
12.0 ft	14.1 fc	13.8 ft	14.3 ft
14.0 ft	10.4 fc	16.2 ft	16.7 ft
16.0 ft	8.0 fc	18.5 ft	19.1 ft
18.0 ft	6.3 fc	20.8 ft	21.5 ft
20.0 ft	5.1 fc	23.1 ft	23.9 ft

**INDOOR COEFFICIENTS OF UTILIZATION**


pc	20%																0%		
	80%				70%				50%				30%						
pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99	0%
1	111	107	103	100	108	105	101	99	100	98	95	96	94	92	92	91	89	87	0%
2	103	96	91	86	100	94	89	85	91	86	83	87	84	81	84	81	79	77	0%
3	96	87	80	75	93	85	79	74	82	77	73	80	75	72	77	73	70	68	0%
4	89	79	72	66	87	78	71	66	75	70	65	73	68	64	71	67	63	61	0%
5	83	73	65	59	81	71	64	59	69	63	58	67	62	58	66	61	57	55	0%
6	78	67	59	54	76	66	59	54	64	58	53	62	57	53	61	56	52	50	0%
7	73	62	54	49	72	61	54	49	59	53	48	58	52	48	57	52	48	46	0%
8	69	57	50	45	68	57	50	45	55	49	45	54	48	44	53	48	44	42	0%
9	65	54	46	42	64	53	46	41	52	46	41	51	45	41	50	45	41	39	0%
10	62	50	43	39	60	50	43	38	49	42	38	48	42	38	47	42	38	36	0%

**OMLS-D-LED-1-S-4-D750L-MLD-DIM10-MVOLT-35K-85**

TEST NO.: **EL12162220**

INPUT WATTS: **40.5** LUMENS: **3714** EFFICACY: **92** BEAM ANGLE: **46** SPACING CRITERIA: **0.74**

**CANDELA DISTRIBUTION**



**CANDELA TABLE**

	0°	90°
0°	6526	6526
10°	5949	5793
20°	4056	3900
30°	1149	1331
40°	72	170
50°	9	12
60°	0	1
70°	0	0
80°	0	0
90°	0	0

**LUMINANCE (cd/sq.m)**

	0.00°	90.00°
0.00°	35121	35121
10°	167	291
20°	32	46
30°	3	2
40°	4	2
50°	8	6

**LUMENS PER ZONE**

ZONE	LUMENS
0° - 10°	595
10° - 20°	1395
20° - 30°	1235
30° - 40°	386
40° - 50°	48
50° - 60°	6
60° - 70°	1
70° - 80°	0
80° - 90°	0

**ZONAL LUMEN SUMMARY**

ZONE	UMENS	% LUMINAIRE
0° - 20°	1990	54%
0° - 30°	3225	87%
0° - 40°	3611	97%
0° - 60°	3666	99%
0° - 80°	3666	99%
0° - 90°	3667	99%

**CONE OF LIGHT**

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°
6.0 ft	181.3 fc	5.1 ft	5.2 ft
8.0 ft	102.0 fc	6.8 ft	6.9 ft
10.0 ft	65.3 fc	8.5 ft	8.6 ft
12.0 ft	45.3 fc	10.3 ft	10.4 ft
14.0 ft	33.3 fc	12.0 ft	12.1 ft
16.0 ft	25.5 fc	13.7 ft	13.8 ft
18.0 ft	20.1 fc	15.4 ft	15.5 ft
20.0 ft	16.3 fc	17.1 ft	17.3 ft


**INDOOR COEFFICIENTS OF UTILIZATION**

pc	20%																0%		
	80%				70%				50%				30%						
pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99	0%
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	97	96	96	94	0%
2	109	105	101	98	107	103	100	97	100	97	95	96	94	93	94	92	90	89	0%
3	104	99	95	91	102	97	93	90	95	91	89	92	89	87	90	88	86	84	0%
4	100	94	89	85	98	92	88	84	90	86	83	88	85	82	86	83	81	80	0%
5	96	89	84	80	94	88	83	79	86	82	79	84	81	78	83	80	77	76	0%
6	92	84	79	75	91	83	79	75	82	78	74	80	77	74	79	76	73	72	0%
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	72	70	69	0%
8	85	76	71	68	84	76	71	68	75	70	67	74	70	67	73	69	67	65	0%
9	81	73	68	64	80	73	68	64	72	67	64	71	67	64	70	66	63	62	0%
10	78	70	65	61	77	69	65	61	69	64	61	68	64	61	67	63	61	60	0%

DISTRIBUTION PATTERNS




**Diffuser**



Up & Down  
**Diffuser**




**Micro Linear Distribution**



Up & Down  
**Micro Linear Distribution**




**Louver**



Up & Down  
**Louver**



**Frosted Block Diffuser**









Up & Down  
**Frosted Block Diffuser**

**End cap**

Quality flat endcaps, made with extra durable and corrosion-resistant diecast aluminum, prevent 100% of light leakage.

**Joinin kit**

Intuitive internal wire connectors make installation and maintenance easy. Comes standard in every fixture at no extra cost.

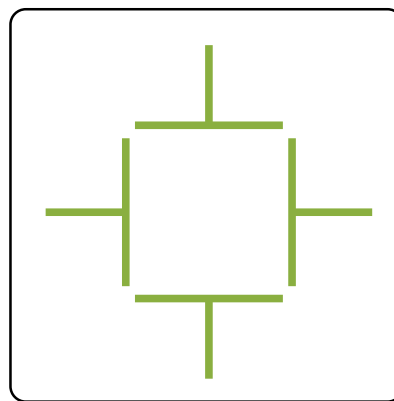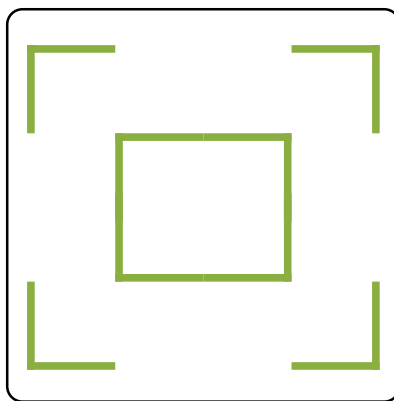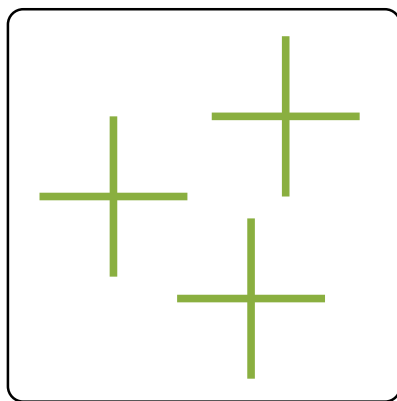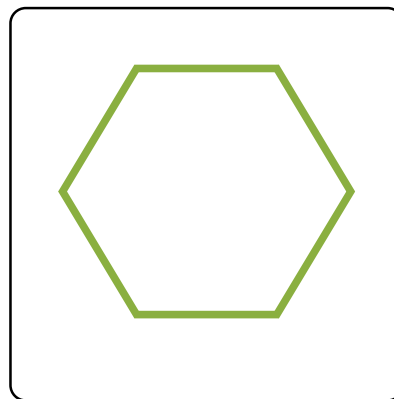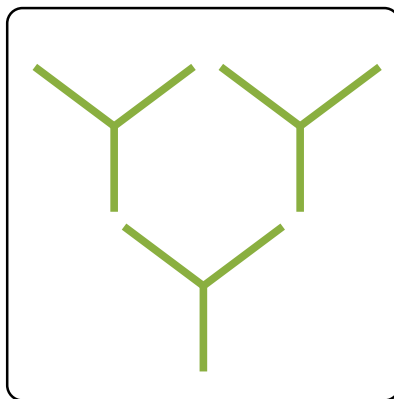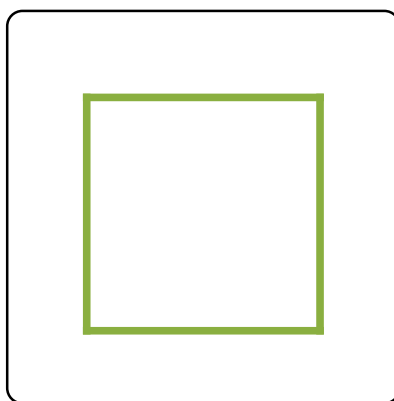

- 1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated contol systems
- 2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems
- 3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT <small>by EnOcean</small>	LUTRON	enlighted	LEVITON	OSRAM	PHILIPS <small>EasySense</small>	legrand®
CONTROL UNIT	<input type="checkbox"/> LEDRU LED Relay Zone Controller 0-10V <sup>1</sup>	<input type="checkbox"/> FCJS-0-10 Lutron Vive 0-10V Individual Control Models <sup>1,4</sup>	<input type="checkbox"/> CU-4E-FMH Fixture Mount Control Unit <sup>1,5</sup>	<input type="checkbox"/> ZL027 –NOW Intellect Power Control Module <sup>1,6</sup>	<input type="checkbox"/> EN-WCM2-ZB-DR Wireless Control Module <sup>1,7</sup>	<input type="checkbox"/> XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver <sup>1,8</sup>	<input type="checkbox"/> LMFC-011 ON/OFF/0-10V dimming fixture controller <sup>1,9</sup>
	<input type="checkbox"/> LEDDU LED Zone Controller 0-10V <sup>1</sup>	<input type="checkbox"/> FCJS-ECO Lutron Vive Eco-system Individual Control Models <sup>1,4</sup>		<input type="checkbox"/> ZL027 –DLE Intellect Power Control Module <sup>1,6</sup>	<input type="checkbox"/> EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module <sup>1,7</sup>		<input type="checkbox"/> FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack <sup>1,9</sup>
INTEGRAT OCCUPANCY& DAYLIGHT SENSOR	N/A	<input type="checkbox"/> DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/ Daylight Sensing <sup>2</sup>	<input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor <input type="checkbox"/> SU-5E-CL Connected Micro Sensor <input type="checkbox"/> SU-5E-IL Independent Micro Sensor <input type="checkbox"/> SU-5S-H(IoT/CL/IL) Serface Mount Sensor <b>(Must be Specified with CU- 4E-FMH Control Unit)<sup>2</sup></b>	<input type="checkbox"/> ZL00J -TOW Intellect Intelligent Fixture Control System <sup>2</sup>  <input type="checkbox"/> ZL00J-DOW Intellect Intelligent Fixture Control System <sup>2</sup>	<input type="checkbox"/> EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor  <input type="checkbox"/> ZBHA- CLM-DIM-ENC Connected Lighting Module DIM <sup>2</sup>	<input type="checkbox"/> SNS200 SNS200 for grouping <sup>2</sup>  <input type="checkbox"/> SNS300 SNS300 for networks <sup>2</sup>	<input type="checkbox"/> FD-301 Fixture integrated Daylight Dimming Sensor <sup>2</sup>  <input type="checkbox"/> FS-205 Fixture integrated passive infrared occupancy sensor <sup>2</sup>
	*WIRELESS OCCUPANCY SENSOR	<input type="checkbox"/> E0SCU-W-E0 Occupancy Sensor - Ceiling Mounted <sup>3</sup>	<input type="checkbox"/> LRF2-OCR2B-P-WH Ceiling mount360° ,occupancy/vacancy sensor <sup>3</sup>	N/A	N/A	<input type="checkbox"/> EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors <sup>3</sup>	N/A
*WIRELESS DAYLIGHT SENSOR	<input type="checkbox"/> ELLSU-W-E0 Light Level Sensor - Ceiling Mounted <sup>3</sup>	<input type="checkbox"/> LRF2-DCRB-WH Ceiling-mount daylight sensor <sup>3</sup>	N/A	N/A	<input type="checkbox"/> EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors <sup>3</sup>	N/A	<input type="checkbox"/> LMLS-400 Single zone switching and dimming digital photosensor <sup>3</sup>
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	<input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor <input type="checkbox"/> SU-5E-CL Connected Micro Sensor <input type="checkbox"/> SU-5E-IL Independent Micro Sensor <input type="checkbox"/> SU-5S-H(IoT/CL/IL) Serface Mount Sensor  <b>(Must be specified with CU- 4E-FMH Control Unit)<sup>3</sup></b>	<input type="checkbox"/> ZL00J -TOW Intellect Intelligent Fixture Control System  <input type="checkbox"/> ZL00J-DOW Intellect Intelligent Fixture Control System  <b>(Must be specified with ZL027-NOW and ZL00J- DOW Control unit)<sup>3</sup></b>	<input type="checkbox"/> EN-CLM- PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor  <input type="checkbox"/> ZBHA- CLM-DIM-ENC Connected Lighting Module DIM <sup>3</sup>	<input type="checkbox"/> SNS200-CMP SNS-200 for Grouping <sup>3</sup>	N/A
ACCESSORIES	N/A	N/A	<input type="checkbox"/> TMC-SU-5E Tile Mount Carrier <input type="checkbox"/> CBL-5E-CU4-30N 30 Inch Sensor cable for CU-4 and IoT Ready <input type="checkbox"/> CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON I ntellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.