

# OMSSL-LED-101

Motion Activated LED Security Light  
with CCT Selector

## 25W Dual-Head Sensor Floodlight

Catalog Number:


Project Name:

Note:


Type:



### DIMENSION:

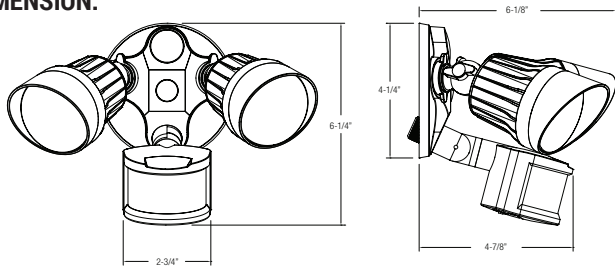

### PHOTOMETRICS:

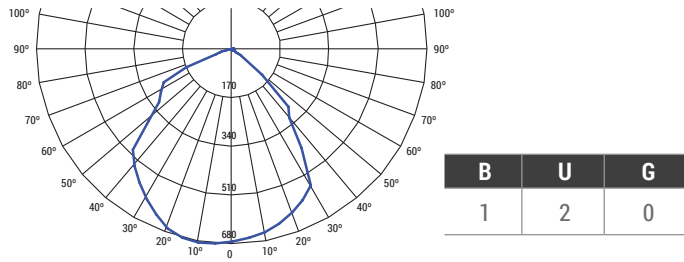

### APPLICATIONS:

The Oracle LED motion Security lighting is now just a motion away. Providing increased safety, security, and peace of mind, it can be easily installed quickly and safely. It saves additional energy by utilizing the dusk-to-dawn feature, supplying full light protection when motion is detected.

### FEATURES:

- Dual adjustable light heads, flexible and cover a wide area
- Precision die-cast aluminum housing
- 360° rotation lens hood
- Low power consumption, equivalent to 120W halogen light
- Motion activated and manual on-off override
- Adjustable detection range and time settings
- Easy and fast installation

<b>SPECIFICATIONS: LUMENS</b>	2500 lumens
<b>WATTAGE</b>	25W
<b>CCT</b>	30K/40K/50K
<b>CRI</b>	80
<b>COLOR CONSISTENCY LIGHT</b>	7-step MacAdam Ellipse binning
<b>EFFICIENCY</b>	90 lumens/watt
<b>BEAM ANGLE</b>	100°
<b>VOLTAGE</b>	120V
<b>POWER FREQUENCY</b>	50/60 Hz
<b>DETECTION DISTANCE TIME</b>	Max. 70 ft (adjustable)
<b>SETTING APPLICABLE</b>	From 10 sec to 5 min
<b>ENVIRONMENT WORKING</b>	Dry/Damp/Wet location
<b>TEMPERATURE</b>	14°F - 104°F
<b>SENSOR DECTION RANGE</b>	180 Degrees



Ordering Guide > Example: OMSSL-LED-101-2500L-120-30K/40K/50K-180-WH

OMSSL-LED-101					
<b>SERIES</b>	<b>PERFORMANCE</b>	<b>VOLTAGE</b>	<b>CCT</b>	<b>SENSOR</b>	<b>FINISH</b>
OMSSL-LED-101	2500L - 2500 lumens/head	120-120V	30K/40K/50K	180 Sensor Detection Range	WH - White BZ - Bronze BK - Black

\*\* DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org](http://www.designlights.org) to confirm which versions are qualified.



Submittal form is available @ [www.oraclelighting.com](http://www.oraclelighting.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions  
subject to change without notice.

Issued-B1118-Rev. 1