

OMSSL-LED-101

Motion Activated LED Security Light

20W Dual-Head Sensor Floodlight

Catalog Number:

Project Name:

Note:

Type:




APPLICATIONS:

The Oracle LED motion Security lighting is now just a motion away. Providing increased safety, security, and peace of mind, it can be easily installed quickly and safely. It saves additional energy by utilizing the dusk-to-dawn feature, supplying full light protection when motion is detected.


FEATURES:

- Dual adjustable light heads, flexible and cover a wide area
- Precision die-cast aluminum housing
- 360° rotation lens hood
- Low power consumption, equivalent to 120W halogen light
- Motion activated and manual on-off override
- Adjustable detection range and time settings
- Easy and fast installation

DIMENSION:

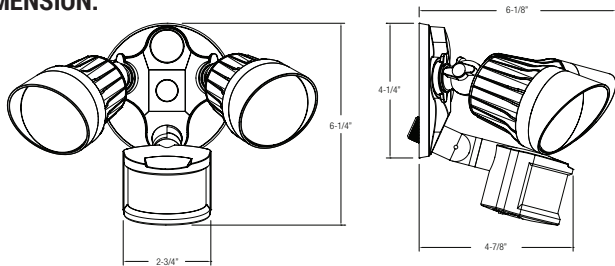

PHOTOMETRICS:

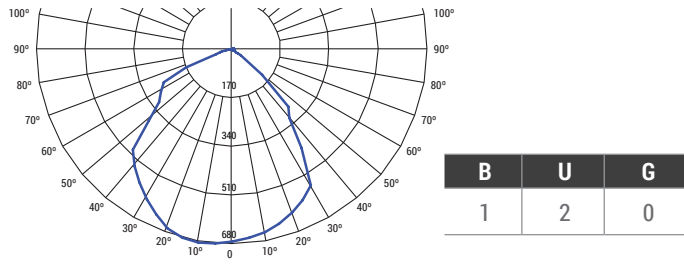

SPECIFICATIONS: LUMENS

1800 lumens

WATTAGE

20W

CCT

30K, 40K, 50K

CRI

80

COLOR CONSISTENCY LIGHT

7-step MacAdam Ellipse binning

EFFICIENCY

90 lumens/watt

BEAM ANGLE

100°

VOLTAGE

120V

POWER FREQUENCY

50/60 Hz

DETECTION DISTANCE TIME

Max. 70 ft (adjustable)

SETTING APPLICABLE

From 10 sec to 5 min

ENVIRONMENT WORKING

Dry/Damp/Wet location

TEMPERATURE

14°F - 104°F



Ordering Guide > Example: OMSSL-LED-101-1800L-120-30K-180-WH

OMSSL-LED-101					
SERIES	PERFORMANCE	VOLTAGE	CCT	SENSOR	FINISH
OMSSL-LED-101	1800L - 900 lumens/head	120 - 120V	30K - 3000K 40K - 4000K 50K - 5000K	180 Sensor Detection Range	WH - White BZ - Bronze

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

Issued-B1118-Rev. 1