

OMSSL-LED-102

Motion Activated LED Security Light

30W 3-Head Sensor Floodlight

Catalog Number:


Project Name:

Note:


Type:



DIMENSION:

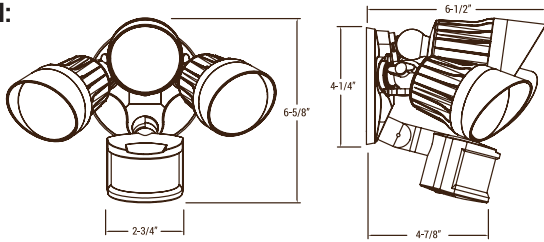

PHOTOMETRICS:

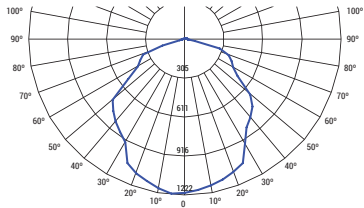

B	U	G
1	2	0

APPLICATIONS:

The Oracle LED motion Security lighting is now just a motion away. Providing increased safety, security, and peace of mind, it can be easily installed quickly and safely. It saves additional energy by utilizing the dusk-to-dawn feature, supplying full light protection when motion is detected.

FEATURES:

- Three adjustable light heads, flexible and cover a wide area
- Precision die-cast aluminum housing
- 360° rotation lens hood
- Low power consumption, equivalent to 120W halogen light
- Motion activated and manual on-off override
- Adjustable detection range and time settings
- Easy and fast installation

SPECIFICATIONS:

LUMENS	2700 lumens
WATTAGE	30W
CCT	30K, 40K, 50K
CRI	80
COLOR CONSISTENCY	7-step MacAdam Ellipse binning
LIGHT EFFICIENCY	90 lumens/watt
BEAM ANGLE	100°
VOLTAGE	120V
POWER FREQUENCY	50/60 Hz
DETECTION DISTANCE	Max. 70 ft (adjustable)
TIME SETTING	From 10 sec to 5 min
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	14°F - 104°F



Ordering Guide > Example: OMSSL-LED-102-2700L-120-30K-180-WH

OMSSL-LED-102					
SERIES	PERFORMANCE	VOLTAGE	CCT	SENSOR	FINISH
OMSSL-LED-102	2700L - 900 lumens/head	120 - 120V	30K - 3000K 40K - 4000K 50K - 5000K	180 Sensor Detection Range	WH - White BZ - Bronze



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

Issued-H2418-Rev. 2