

FEATURES

Elite Lighting's **Architectural Pendant Series**, including the OPR line, delivers a refined balance of performance and design. Engineered with highly efficient LEDs and advanced optics, these pendants feature a slim 2–3" extruded aluminum profile with **bold, sculpted forms** that provide glare-controlled, visually comfortable illumination.

Achieving up to 100 lumens per watt while maintaining a low UGR, the series offers exceptional efficiency without sacrificing visual comfort. Customizable profiles and optical distributions allow pendants to be fabricated in a **wide range of geometric shapes**—circle, square, rectangle, triangle, hexagon, and more—empowering limitless architectural expression.

Designed with a human-centric approach, Elite Lighting Architectural Pendants integrate seamlessly into modern spaces, elevating interiors with clean geometry, premium performance, and inspired illumination.

COLORS



White



Black



Silver



Gold



Custom RAL


| | |
|-----------------|-------------------------------------------------------------------------------------------------|
| LUMENS | (S) 2000L, 4000L, 4500L (M) 5000L, 7000L, 9000L, 10000L (L) 9000L, 12000L, 16000L, 18000L |
| CCT | 2700K/3000K/3500K/4000K/ 5000K/6000K Tunable white RGB/RGBW/RGBWW |
| CRI | 90, 95 |
| POWER | (S) 20W, 40W, 50W (M) 50W, 70W, 90W, 100W (L) 90W, 120W, 160W, 180W |
| SIZE | (S) 24.2" x 21" (M) 36" x 31.2" (L) 47.2" x 40.9" |
| MOUNTING | Suspended, Recessed, Surface Mount |
| COLOR | White, Black, Silver, Gold, Custom RAL |
| DIMMING | Non Dali Triac 0-10V Tunable |

Example: **OPR-HEX-24IN-2000L-DIM10-MVOLT-40K-90-WH-SM**

| SERIES | STYLE | SIZE | DIRECT LUMENS | DIMMING | VOLTAGE | CCT | CRI | EMERGENCY | FINISH | MOUNTING OPTIONS |
|-----------|---------------|----------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| OPR - OPR | HEX - Hexagon | 24IN - 24.2" x 21" | 2000L - 2000 Lumens 4000L - 4000 Lumens 4500L - 4500 Lumens | DIM10 - 0-10V Dimming (Non Dali Triac 0-10V Tunable) | 120 277 MVOLT | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K 60K - 6000K WH - Tunable white RGB - RGB RGBW - RGBW | 90 - 90 95 - 95 | 0-EMG-LED-10W ¹ 0-EMG-LED-25W ¹ | WH - Matte White BK - Black SI - Silver GD - Gold RAL ² - custom color | SM - 10' Suspended Mount (Consult factory for other sizes) RT - Recessed Trimless SR - Surface Mount |
| | | 36IN - 36" x 31.2" | 5000L - 5000 Lumens 7000L - 7000 Lumens 9000L - 9000 Lumens 10000L - 10000 Lumens | | | | | | | |
| | | 47IN - 47.2" x 40.9" | 9000L - 9000 Lumens 12000L - 12000 Lumens 16000L - 16000 Lumens 18000L - 18000 Lumens | | | | | | | |


¹ Remote
² Consult Factory

DIMENSIONS

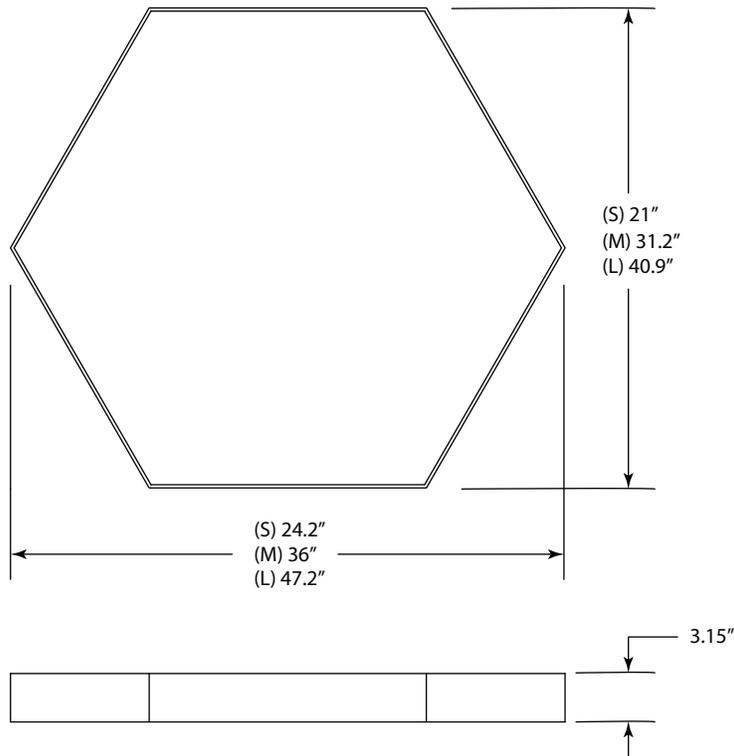


MOUNTING

SIDE CANOPY MOUNTING

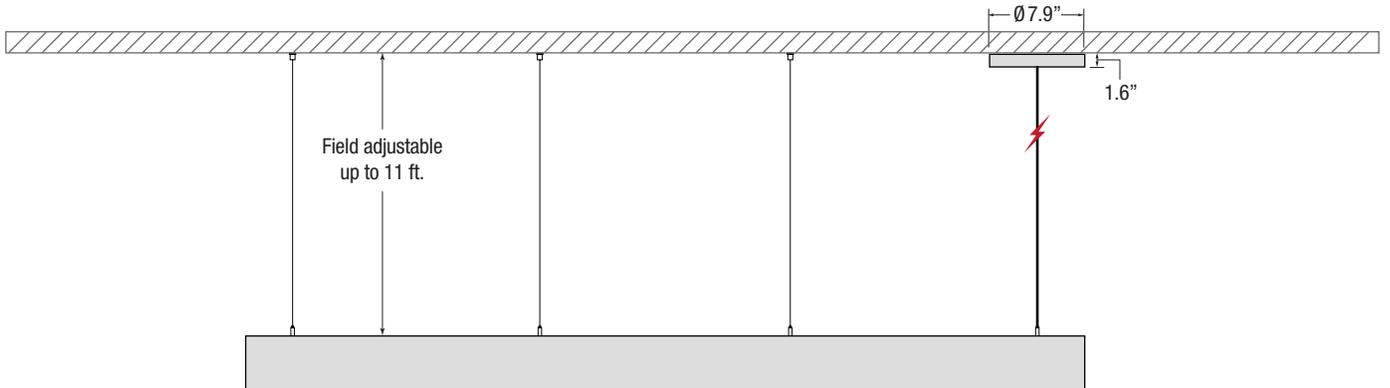

CENTRAL CANOPY MOUNTING

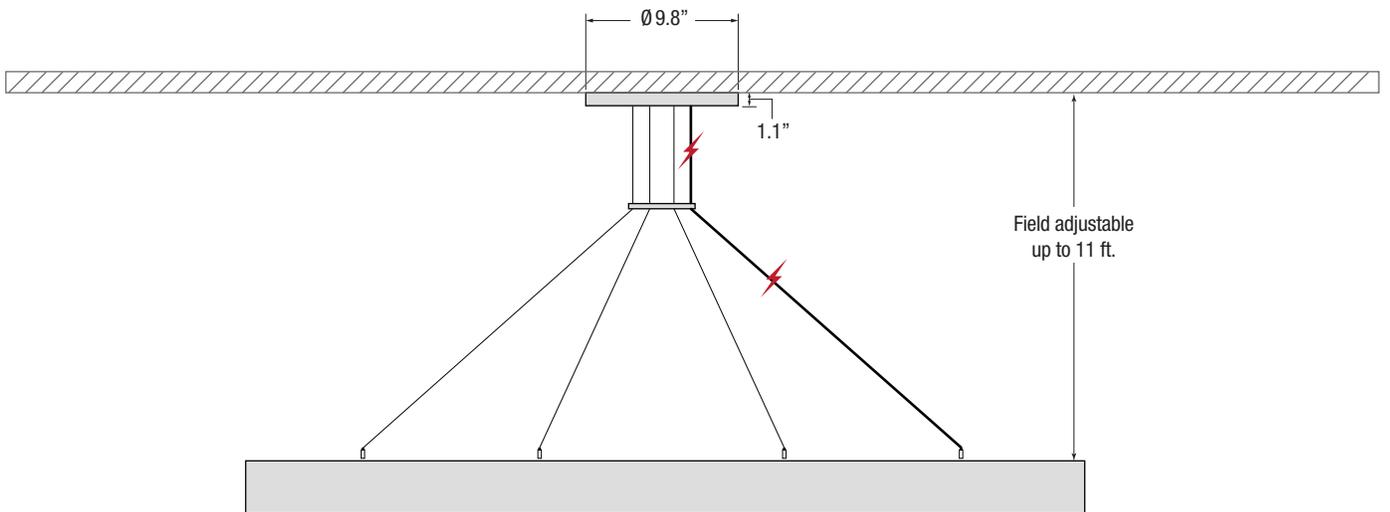

SURFACE MOUNTING



RECESSED MOUNTING

