


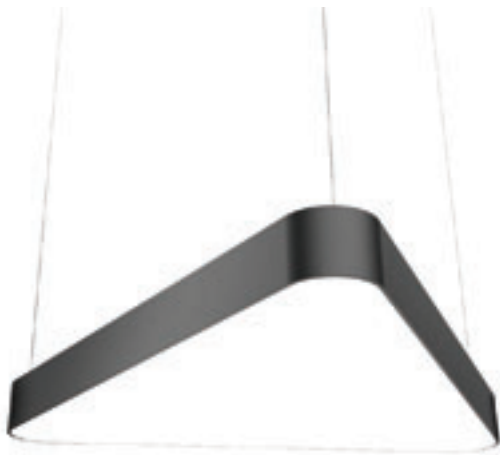

FEATURES

Elite Lighting's Architectural Pendant Series, including the OPR line, delivers a refined balance of performance and design. Engineered with highly efficient LEDs and advanced optics, these pendants feature a slim 2–3" extruded aluminum profile with gently curved, sculpted forms that provide glare-controlled, visually comfortable illumination.

Achieving up to 100 lumens per watt while maintaining a low UGR, the series offers exceptional efficiency without sacrificing visual comfort. Customizable profiles and optical distributions allow pendants to be fabricated in a wide range of geometric shapes—circle, square, rectangle, triangle, hexagon, and more—empowering limitless architectural expression.

Designed with a human-centric approach, Elite Lighting Architectural Pendants integrate seamlessly into modern spaces, elevating interiors with clean geometry, premium performance, and inspired illumination.

COLORS




White



Black



Silver



Gold



Custom RAL


LUMENS	(S) 2000L, 3500L, 4000L (M) 4500L, 8000L, 9000L (L) 7000L, 9000L, 12000L, 14000L
CCT	2700K/3000K/3500K/4000K/ 5000K/6000K Tunable white RGB/RGBW/RGBWW
CRI	90, 95
POWER	(S) 20W, 35W, 40W (M) 45W, 80W, 90W (L) 70W, 90W, 120W, 140W
SIZE	(S) 23.6" x 21.5" (M) 35.4" x 32.3" (L) 47.2" x 42.5"
MOUNTING	Suspended, Recessed, Surface Mount
COLOR	White, Black, Silver, Gold, Custom RAL
DIMMING	Non Dali Triac 0-10V Tunable

Example: **OPR-TRI-R-23IN-2000L-DIM10-MVOLT-40K-90-WH-SM**

SERIES	STYLE	SIZE	DIRECT LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	FINISH	MOUNTING OPTIONS
OPR - OPR	TRI-R - Triangle Rounded	23IN - 23.6" x 21.5"	2000L - 2000 Lumens 3500L - 3500 Lumens 4000L - 4000 Lumens	DIM10 - 0-10V Dimming (Non Dali Triac 0-10V Tunable)	120 277 MVOLT	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K 60K - 6000K WH - Tunable white RGB - RGB RGBW - RGBW	90 - 90 95 - 95	0-EMG-LED-10W ¹ 0-EMG-LED-25W ¹	WH - Matte White BK - Black SI - Silver GD - Gold RAL ² - custom color	SM - 10' Suspended Mount (Consult factory for other sizes) RT - Recessed Trimless SR - Surface Mount
		35IN - 35.4" x 32.2"	4500L - 4500 Lumens 8000L - 8000 Lumens 9000L - 9000 Lumens							
		47IN - 47.2" x 42.4"	7000L - 7000 Lumens 9000L - 9000 Lumens 12000L - 12000 Lumens 14000L - 14000 Lumens							


¹ Remote
² Consult Factory

DIMENSIONS

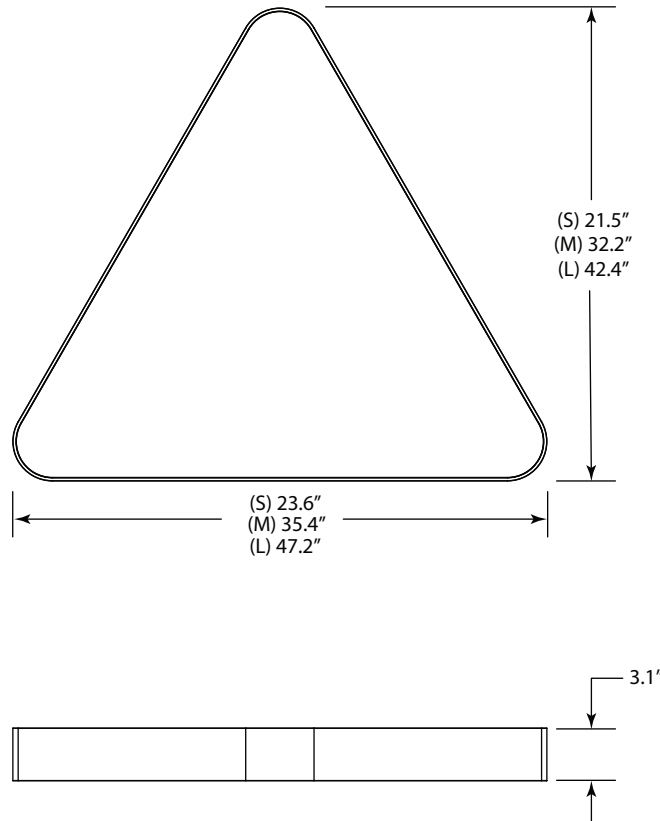


MOUNTING

SIDE CANOPY MOUNTING

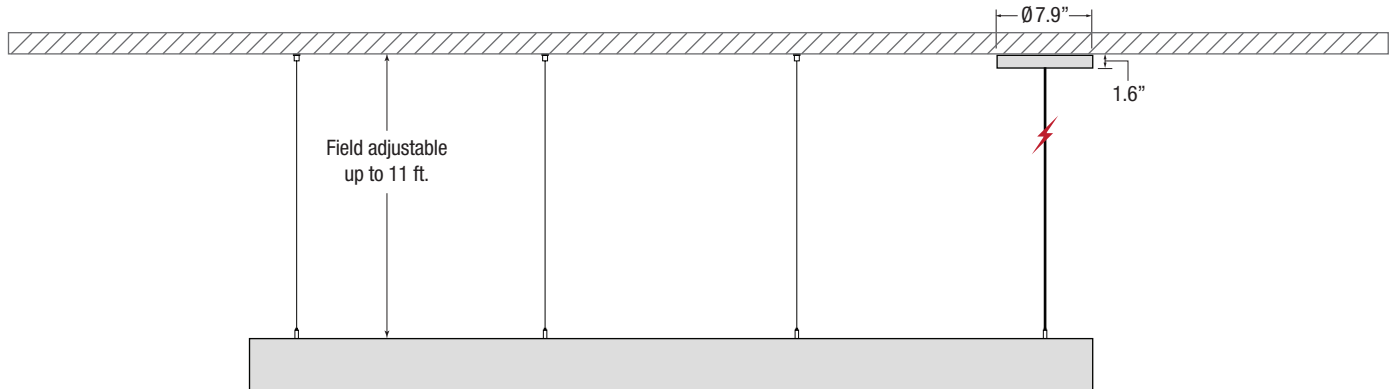

CENTRAL CANOPY MOUNTING

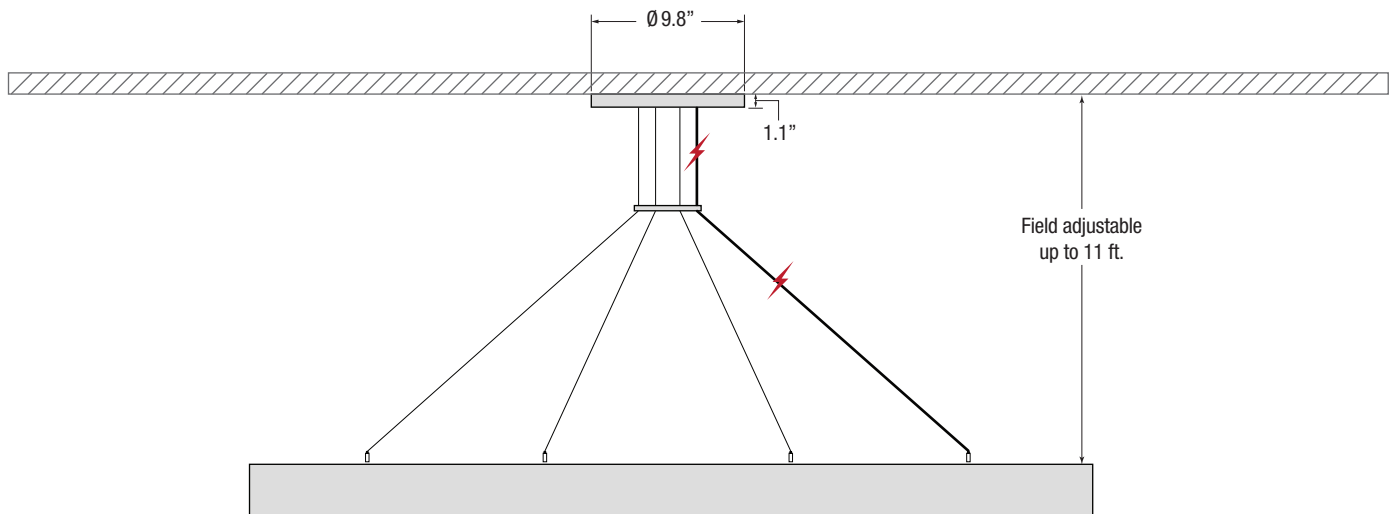

SURFACE MOUNTING



RECESSED MOUNTING

