


OPS2-LED

UP TO
4000
LUMENS



OPR LED PENDANT SERIES

DIMENSIONS:

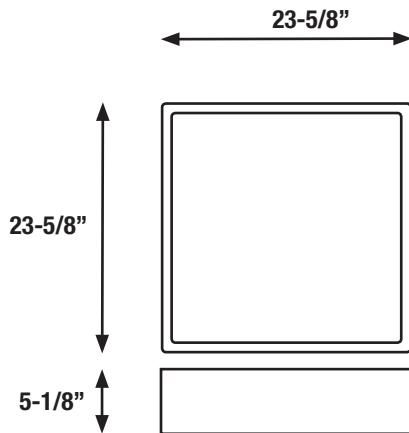

Catalog Number:

Project Name:

Type:

Note:

ORACLE
LIGHTING

APPLICATION - OPS2-LED pendants offer direct ambient illumination. Its clean, classic look provides light over any environment including schools, boardrooms, office areas, hotels, lobbies, restaurants, etc. OPS2-LED is suitable for any design application with its variety in sizes.

CONSTRUCTION - Rigid aluminum design ensures longevity and endurance. A high quality, high transmission, glare free lens offers smooth illumination.

PERFORMANCE - The honeycomb light engines found in the OPS2-LED are rated at 80+ CRI and are available in multiple CCTs: 3000K, 3500K and 4000K. Rated and tested to LM-79 and LM-80 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

ELECTRICAL - Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING - The OPS2-LED comes standard with 0-10V dimming on either 120, in and 277V. 347V please consult factory. Dimmable down to 1% of initial lumens. Also available in Lutron dimming options. Consult factory for dimmer compatibility.

MOUNTING - Comes standard in ceiling mount or adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings. Consult factory for additional mounting options.

QUALITY CONTROL - Every fixture is rigorously tested by our QC Department before shipping.

LISTING - ETL/C-ETL listed to US and Canadian standards

WARRANTY - Limited 5 Year Warranty

EXAMPLE: OPS2-LED-4000L-DIM10-MVOLT-40K-WH-CM							
SERIES	LUMENS	DIMMING/VOLTAGE	CCT	EMERGENCY	COLOR	MOUNTING OPTION	
OPS2-LED	<input type="checkbox"/> 4000L	<input type="checkbox"/> DIM10-MVOLT <input type="checkbox"/> LUTH-MVOLT <input type="checkbox"/> DIMTR-120	<input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> EMG-LED Remote Mounted for Surface Mount	<input type="checkbox"/> WH (Matt White) <input type="checkbox"/> BK (Black) <input type="checkbox"/> SI (Silver) Custom color available, please consult factory. Must provide RAL#	<input type="checkbox"/> CM-Ceiling Mount <input type="checkbox"/> SM-10' Suspended Mount (Consult factory for other sizes)	
	<input type="checkbox"/> 4000L	<input type="checkbox"/> DIM10-MVOLT <input type="checkbox"/> DMX-512-MVOLT <input type="checkbox"/> DMX-RDM-MVOLT <input type="checkbox"/> DLM (WBL3 Only)	<input type="checkbox"/> TWH-50K-27K <input type="checkbox"/> TWH-LTX-80K-16K <input type="checkbox"/> TWH-WBL3-65K-27K				
	<input type="checkbox"/> 4000L	<input type="checkbox"/> DIM10-MVOLT <input type="checkbox"/> DMX-512-MVOLT <input type="checkbox"/> DMX-RDM-MVOLT <input type="checkbox"/> DALI-MVOLT	<input type="checkbox"/> WDM				
	<input type="checkbox"/> 4000L	<input type="checkbox"/> DMX-512-MVOLT	<input type="checkbox"/> RGBW				