






Series
14000/17000/21000



Series
26000/29000/33000



Series
30000/35000/42000

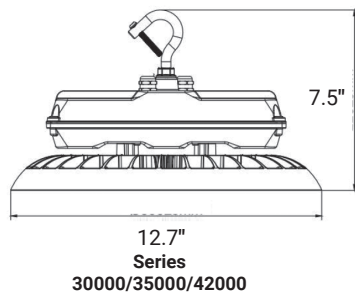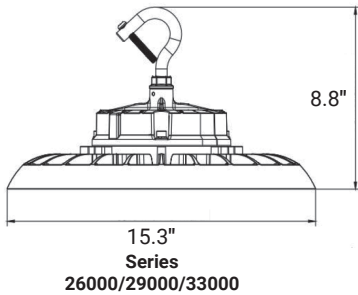

FEATURES

The Oracle ORHB5 High Bay is a round high bay designed to withstand high temperatures, wet environments, airborne contaminants, and electrical shock. Selectable High lumen output and circular form factor leave no dark corners. Built-in hanging hook included for easy pendant installation. Applications include warehouses, commercial facilities, retail, roadways, campuses, garages with high ceilings, and gymnasiums.

LUMENS	14000/17000/21000 26000/29000/33000 30000/35000/42000
CCT	40K, 50K
CRI	80+ Standard
COLOR QUALITY	3 Step MacAdam Ellipse
MOUNTING	Suspended, Surface Mount
DISTRIBUTION	Wide Distribution (WD)
DIMMING & CONTROL	0-10V Flicker Free 10% Dimming Standard (DIM10)
EMERGENCY	20W - Up to 2000L Output 20W - Up to 4000L Output
WORKING TEMPERATURE	-30°C to 50°C
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

Series 14000/17000/21000		
NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
21000	21000	150 W
17000	17000	119W
14000	14000	99W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%


Series 26000/29000/33000		
NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
33000	33000	237 W
29000	29000	199W
26000	16000	177W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

Series 30000/35000/42000		
NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
42000	42000	300W
35000	35000	239W
30000	30000	201W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

WD-90°
Candlepower Distribution Curve



PERFORMANCE

Efficacy up to 160lm/W, designed to replace 400W metal halide (MH) bulbs while consuming 200W. Increase energy savings with optional bi-level motion sensor.

OPTICS

A .16" thick clear tempered glass lens protects LEDs. Reflector and lens options provide maximum versatility and uniformity. Conical, flat, aluminum, prismatic or acrylic clear/frosted drop lenses offer enhanced aesthetics, minimize glare at lower mounting heights when paired with acrylic reflectors.

CONSTRUCTION

One-piece, sealed die-cast aluminum housing requires no additional parts. Heat sink included in casting, preventing high bay from heating up during use. Wet location rating serves both indoor and outdoor applications.

INSTALLATION

Included: Hook mount, safety cable, 6-ft. power cord, and 0-10V dimming cord. Conduit pendant also possible with optional accessory: pendant/stem mount bracket with 3/4" hub and j-box. Surge Protection Level: Built-in 6 kV surge protection; class 2 product (shock-resistant).

FINISH

Black polyester powder coat finish painted after fabrication

LUMEN SELECT OPTION

Easily access field-adjustable 3-lumen Selector for switch without lowering the luminaire from the Ceiling

ELECTRICAL

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Available in 347V., produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277V.

RATINGS

UL wet location rated
IP65-rated; completely sealed to protect against water and dirt
DLC-listed

WARRANTY

Five-year warranty for parts and components. (Labor not included)

Example: **ORHB5-LED-14000/17000/21000-MVOLT-40K-WD-BK**

ORHB5	LED									
SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	OPTICS	FINISH	EMERGENCY	REFLECTOR OPTIONS	
ORHB5 Oracle LED Round High Bay Series	LED	14000/17000/21000 26000/29000/33000 30000/35000/42000	DIM10 - 0-10V	MVOLT	40K 50K	WD	BK - Black	0-EMG-LED-20W 0-EMG-LED-40W	Aluminum Reflector ORHB5-14/17/21-26/29/33-ALR (14000/17000/21000 Lumens) (26000/29000/33000 Lumens) ORHB5-30/35/42-ORHB6-28/30/34-ALR (30000/35000/42000 Lumens) Acrylic Clear Reflector ORHB5-14/17/21-26/29/33-ARC (14000/17000/21000 Lumens) (26000/29000/33000 Lumens) ORHB5-30/35/42-ORHB6-28/30/34-ARC (30000/35000/42000 Lumens)	

LENS OPTIONS	OTHER OPTIONS
Conical Bottom ORHB5-14/17/21-26/29/33-ORHB6-15/18/22-CB (14000/17000/21000 Lumens) (26000/29000/33000 Lumens) ORHB5-30/35/42-ORHB6-28/30/34-CB (30000/35000/42000 Lumens)	FSP311-B-D* - SIDE Mount 0-10V continuous dimming PIR photo/motion sensor with bluetooth control option. ORHB5/ORHB6-MS-PIR - Integrated 0-10V continuous dimming PIR motion sensor with hadheld control option. ORHB5/ORHB6-MS-MW - Microwave Motion Sensor ORHB5/ORHB6-RC - Remote Control Compatible with Highbay Sensors ORHB5-30/35/42-ORHB6-28/30/34-WG - Wire Guard for ORHB5-30000/35000/42000L ORHB5-14/17/21-26/29/33-WG - Wire Guard for ORHB5-14000/17000/21000L & 26000/29000/33000L ORHB5-14/17/21-26/29/33-ORHB6-15/18/22-BRK-BK - (Black) Pendant/Stem mount bracket with 3/4" hub and j-box IP for: ORHB5-14000/17000/21000L & 26000/29000/33000L ORHB5-14/17/21-26/29/33-ORHB6-15/18/22-BRK-WH - (White) Pendant/Stem mount bracket with 3/4" hub and j-box IP for: ORHB5-14000/17000/21000L & 26000/29000/33000L ORHB5-30/35/42-ORHB6-28/30/34-BRK-BK - (Black) Pendant/Stem mount bracket with 3/4" hub and j-box IP for: ORHB5-30000/35000/42000L ORHB5-30/35/42-ORHB6-28/30/34-BRK-WH - (White) Pendant/Stem mount bracket with 3/4" hub and j-box IP for: ORHB5-30000/35000/42000L