ORACLE LIGHTING
By Elite Lighting

ORHB6-ZOOM-LED

LED UFO High Bay with Multi-lumen, Multi-CCT, and Adjustable Distribution

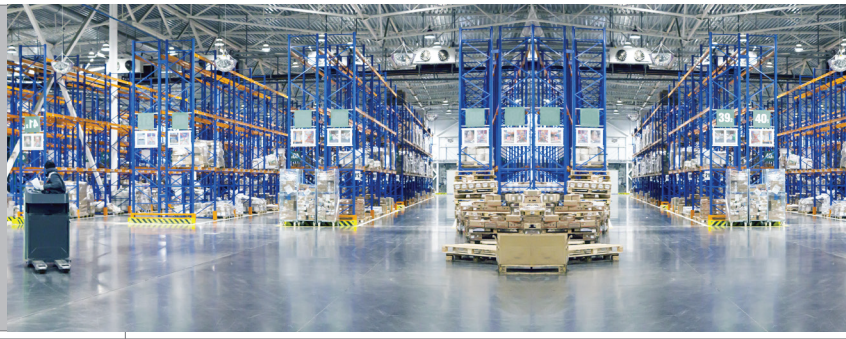

MULTILUMEN SELECTOR

EASY 3 COLORS SELECCTOR
3500K •4000K • 5000K

DIMENSIONS

15000L/18000L/22000L

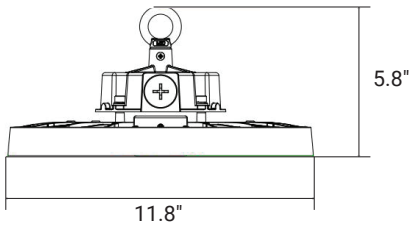

27000L/30000L/36000L

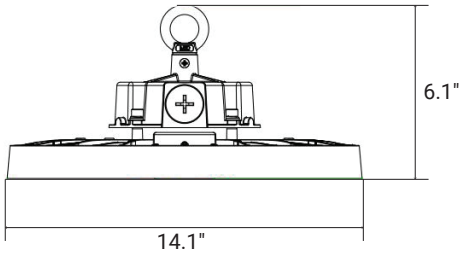

15000L/18000L/22000L

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
2200L	22010	150W
1800L	18001	120W
1500L	15998	100W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

27000L/30000L/36000L

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
36000L	36005	240W
30000L	29998	200W
27000L	27010	185W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

This LED UFO high bay features a modern frame and adjustable distributions for ultra bright, ultra versatile illumination. A selectable beam angle switch allows for the luminaire to adjust between ND (60°), MD (80°), and WD (100°) distributions for adaptable light, and multi-lumen and multi-CCT options allow for in-field adjustments to color temperature and light output.

Ideal as an energy efficient replacement for conventional fluorescent and HID high bays in manufacturing facilities, gymnasiums, warehouses, and more. IP65 and wet location rated.

LUMENS	15000L/18000L/22000L, 27000L/30000L/36000L
CCT	35K/40K/50K
CRI	85+ Standard
COLOR QUALITY	3-Step MacAdam Ellipse
MOUNTING	Suspended, Surface Mount
DISTRIBUTION	Wide (100º), Medium (80º), Narrow (60º) Distribution
DIMMING	DIM10 - 0-10% Flicker Free 10% Dimming
FINISH	Black (BK), White (WH)
EMERGANCY	EMG-LED-ORHB1-40-BK EMG-LED-ORHB1-40-WH EMG-LED-ORHB1-RC REMOTE CONTROL FOR ORHB1-EMGERGENCY, CAN REMOTE TEST FOR EMERGENCY FUNCTION
WORKING TEMPERATURE	-30°C (-22°F) to 50 °C (122°F)
LIFETIME	L70 at 50,000 hours
RATING	IP65 Rated
PHOTOMETRIC TESTS	In accordance with IES LM79-08, LM80 and TM-30, TM-21

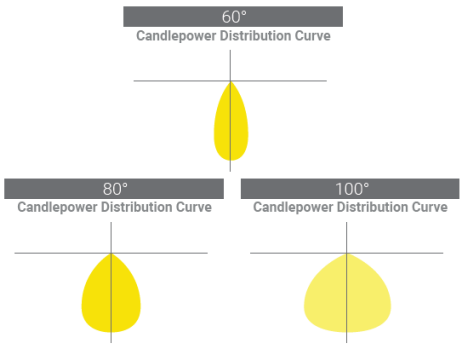

DLC LISTED · cULus LISTED · FOR WET LOCATION · IP65 · 5 YEARS LIMITED WARRANTY

Due to the changes of constant improvement in LED technology, all details are subject to change without notice. Consult factory for up to date information.
MMDDYY

ORACLE LIGHTING
By Elite Lighting

ORHB6-ZOOM-LED

LED UFO High Bay with Multi-lumen, Multi-CCT, and Adjustable Distribution

OPTICS
Features a durable, UV stabilized polycarbonate lens for an even beam diffusion, heat resistance, and protection against discoloration. A selectable beam angle switch allows for the luminaire to adjust between ND (60°), MD (80°), WD (100°) distributions for a versatile, adaptable illumination.

Built with ultra efficient, ultra bright 2835 LEDs for optimal energy and cost efficiency.

Luminaire available in selectable lumens of 15000L/18000L/22000L or 27000L/30000L/36000L, for customizable intensity with a variety of uses. Three selectable color temperatures of 3000K/4000K/5000K enable different warm to cool moods and atmospheres.

CCT factory set to 5000K; lumen factory set to 22000L or 36000L, depending on lumen package chosen.

CONSTRUCTION
Body built from a light weight and robust, die-cast aluminum for durability and ease of installation. A finned design helps evenly distribute heat to prevent overheating and ensure optimal performance.

Adjustable distribution switch, multi-lumen, and multi-CCT switches located across from each other, on top of the luminaire.

Fully sealed and gasketed for IP65 rated exposure to water.

Available in black and white finishes.

MOUNTING
Suitable for Suspended and Surface Mounting.

A stainless steel 304 hook mount, safety cable, and 6 ft power cord and 0-10V dimming cord included for suspended mounting.

Conduit pendant surface mounting possible with available pendant/stem mount bracket. See OPTIONS & ACCESSORIES for more information.

MAINTENANCE
Fixture may be wiped down with a dry or damp cloth or hosed down for optimal performance.

OPTIONS & ACCESSORIES
Luminaire packed standard with:
- Stainless steel 304 hook mount
- Safety cable
- 6 ft power cord
- 0-10V dimming cord

Sold Separately:
- Various PIR motion and photocell sensor options and controls.

- Wire guard options for both for both 15000L/18000L/22000L or 27000L/30000L/36000L.

- Pendant/Stem Mount brackets with 3/4" hub and j-box for both 15000L/18000L/22000L or 27000L/30000L/36000L. Available in black or white.

- 40W Emergency battery back-up option available to order in black and white. Remote option also available.

See order chart for more details.

DIMMING
DIM10 - Flicker Free 10% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277V. 120-347v 60Hz operation.

DRIVER & ELECTRICAL INFORMATION
Powered by high-quality constant-current LED drivers which are rated for 50 to 60Hz at 120/277v, 347V input, produce less than 20% THD, and have a power factor of .90 to 1.00. 6KV surge protection included. Class 2 product (shock-resistant).

WARRANTY
5-year warranty for parts and components (labor not included).

LISTINGS
UL Listed.
cUL listed.
DLC Premium listed.
IP65 rated for wet location use.

Example: **ORHB6-ZOOM-LED-15000L/18000L/22000L-DIM10-120-347V-35K/40K/50K-ND/MD/WD-BK**

ORHB6-ZOOM-LED							
SERIES	**LUMENS**	**DIMMING**	**VOLTAGE**	**CCT**	**OPTICS**	**FINISH**	**EMERGENCY**
ORHB6-ZOOM-LED	**15000 /18000 /22000** **27000 /30000 /36000**	**DIM10** - 0-10V Dimming	**120-347V**	**35K/40K/50K**	**ND/MD/WD**	**BK** - Black **WH** - White	**EMG-LED-ORHB1-40-BK** **EMG-LED-ORHB1-40-WH** **EMG-LED-ORHB1-RC**

REFLECTOR OPTIONS	LENS OPTIONS	OTHER OPTIONS
Aluminum Reflector **ORHB6-15/18/22-ALR** (15000 /18000 /22000) **ORHB5-30/35/42-ORHB6-28/30/34-ALR** (27000 /30000 /36000)	Conical Bottom* **ORHB5-14/17/21-26/29/33-ORHB6-15/18/22-CB** (15000 /18000 /22000) **ORHB5-30/35/42-ORHB6-28/30/34-CB** (27000 /30000 /36000)	**MS-PIR-BI-SR-101 -** PIR sensor **MS-RC-G1 -** Remote control **ORHB6-ZOOM-15/18/22-WG -** Wire guard (15000 /18000 /22000) **ORHB6-ZOOM-27/30/36-WG -** Wire guard (27000 /30000 /36000) **ORHB5-14/17/21-26/29/33-ORHB6-15/18/22-BRK-BK -** U bracket (15000 /18000 /22000) **ORHB5-30/35/42-ORHB6-28/30/34-BRK-BK -** U bracket (27000 /30000 /36000)
Acrylic Clear Reflector **ORHB6-ZOOM-15/18/22-ARC** (15000 /18000 /22000) **ORHB5-30/35/42-ORHB6-28/30/34-ARC** (27000 /30000 /36000)		

Due to the changes of constant improvement in LED technology, all details are subject to change without notice. Consult factory for up to date information.

ORHB6-ZOOM-LED

LED UFO High Bay with Multi-lumen, Multi-CCT, and Adjustable Distribution

REFLECTORS:

ORHB6-15/18/22-ALR
ORHB5-30/35/42-ORHB6-28/30/34-ALR
Aluminum Reflector

ORHB6-ZOOM-15/18/22-ARC
ORHB5-30/35/42-ORHB6-28/30/34-ARC
Acrylic Clear Reflector

LENS ACCESSORIES:

ORHB5-14/17/21-26/29/33-ORHB6-15/18/22-CB
ORHB5-30/35/42-ORHB6-28/30/34-CB
Conical Bottom

WIRE GUARD

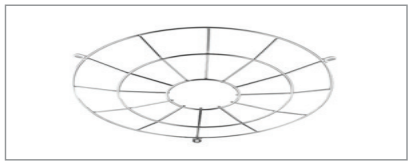

ORHB6-ZOOM-15/18/22-WG
ORHB6-ZOOM-27/30/36-WG

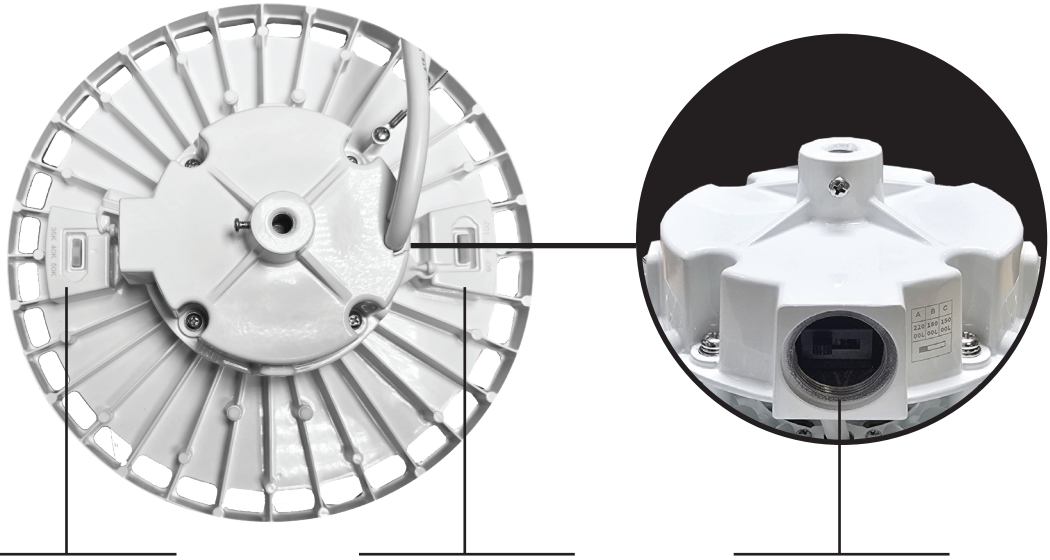

EASY 3 COLORS
SELECCTOR
3500K •4000K • 5000K

ND | MD | WD
60° | 80° | 100°

MULTILUMEN SELECTOR
15000L/18000L/22000L
27000L/30000L/36000L

Due to the changes of constant improvement in LED technology, all details are subject to change without notice. Consult factory for up to date information.