OVR-103-LED

LED Small Square Canopy CCT/Lumen select LED Series

| Catalog Number: | |
|-----------------|-------|
| Project Name: | |
| Note: | Туре: |



APPLICATIONS:

The Oracle LED Canopy Light is designed to provide an aesthetically pleasing low-profile luminaire that produces a high light output while keeping energy and maintenance costs low. Easily access field-adjustable 3-Color SeleCCT from 3000K - 4000K - 5000K, ideal for parking garages, walkways, storage areas, underpasses, and stairwells.


FEATURES:

- · Sealed die-casting profile for outdoor applications.
- Input Voltage MVOLT
- Lumen output from 4000 8000Lm with efficacy up to 141 lm/W.
- Increase energy savings with optional bi-level motion sensor.
- Replacing 100W MH and 175 W MH saving over 75% energy consumption.
- Operating temperature is -40°C to 40°C (-40°F to 104°F).
- · UL/cUL wet location.
- CCT Option Easily access field-adjustable 3-Color SeleCCT from 3000K-4000K-5000K or switch without lowering the luminaire from the ceiling.
- Surface mount with J-BOX; Pendant installation with 3/4 inch conduit.


SPECIFICATIONS:

| LUMENS | NS 4000 / 6000 / 8000 lumens | |
|---|-------------------------------------|--|
| WATTAGE | 28W / 40W / 60W | |
| CCT | 30K-40K-50K | |
| CRI | 80 | |
| LIGHT EFFICIENCY 130 lumens/watt | | |
| VOLTAGE | MVOLT | |
| POWER FREQUENCY | 50/60 Hz | |
| FINISH | Bronze, White, Black | |
| APPLICABLE ENVIRONMENT | Dry/Damp/Wet location | |
| WORKING TEMPERATURE | -40°C to 40°C | |

DIMENSION:



PHOTOMETRICS:



| В | U | G |
|---|---|---|
| 1 | 3 | 2 |












Ordering Guide > Example: **OVR-103-LED-**4000/6000/8000L-DIM10-MVOLT-30K/40K/50K

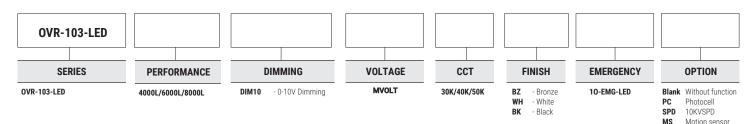

^{**} DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



OVR-103-LED

LED Small Square Canopy CCT/Lumen select LED Series

| Catalog Number: | |
|-----------------|-------|
| Project Name: | |
| Note: | Туре: |

ACCESSORY

| MODEL | SPD | Photocell | Motion Sensor | Motion Sensor | EM Driver |
|-------|-----------------|-----------|---------------|---------------|-----------|
| IMAGE | DOMPS OF STREET | - | P → ■ | | |

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

