# OVR-104-LED

LED Small Square Canopy CCT/Lumen select LED Series

Туре:

The Oracle LED Canopy Light is designed to provide an aesthetically pleasing low-profile luminaire that produces a high light output while keeping energy and maintenance costs low. Easily access field-adjustable 3-Color SeleCCT from 3000K - 4000K - 5000K, ideal

for parking garages, walkways, storage areas, underpasses, and stairwells.

### **APPLICATIONS:**

**FEATURES:** 


Input Voltage MVOLT









#### **DIMENSION:**



### **PHOTOMETRICS:**










Ordering Guide > Example: OVR-104-LED-8000/10000/12000L-DIM10-MVOLT-30K/40K/50K

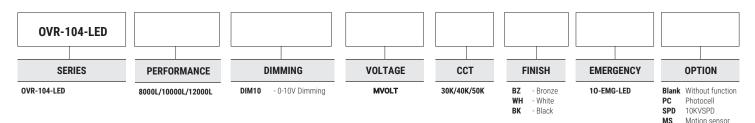

\*\* DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



Submittal form is available @ www.oraclelighting.com Tel: 323-888-1973 • Fax: 323-888-1977 Specifications and Dimensions subject to change without notice

UL/cUL wet location.
CCT Option Easily access field-adjustable 3-Color SeleCCT from 3000K-4000K-5000K or

switch without lowering the luminaire from the ceiling.

• Operating temperature is -40°C to 40°C (-40°F to 104°F).

· Sealed die-casting profile for outdoor applications.

• Surface mount with J-BOX; Pendant installation with 3/4 inch conduit.

• Lumen output from 8000 - 12000Lm with efficacy up to 141 lm/W. • Increase energy savings with optional bi-level motion sensor.

• Replacing 100W MH and 175 W MH saving over 75% energy consumption.

#### SPECIFICATIONS:


LUMENS	8000 / 10000 / 12000 lumens
WATTAGE	70W / 80W / 90W
ССТ	30K-40K-50K
CRI	80
LIGHT EFFICIENCY	130 lumens/watt
VOLTAGE	MVOLT
POWER FREQUENCY	50/60 Hz
FINISH	Bronze, White, Black
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 40°C

# OVR-104-LED

LED Small Square Canopy CCT/Lumen select LED Series

Catalog Number:	
Project Name:	
Note:	Туре:

## ACCESSORY



\*\* DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC qualified Products List at www.designlights.org to confirm which versions are qualified.



Submittal form is available @ www.oraclelighting.com Tel: 323-888-1973 • Fax: 323-888-1977 Specifications and Dimensions subject to change without notice.