




EASY 3 COLORS
SELE**CCT**OR

DIMENSION:

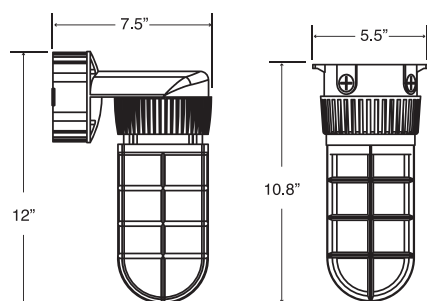

NOMINAL LUMENS	DELIVERED LUMENS	*WATTAGE
1700	1664	17 W
1400	1394	14 W
1000	1005	10 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

The OVT, an IP55-, wet-location-rated compact vapor tight, delivers high output and even distribution. Weather- and corrosion-resistant and ideal for indoor or outdoor use. Available in either ceiling or wall mount with a frosted glass lens. Ideal for corridors, tunnels, service areas, and stairwells.

LUMENS	1000, 1400, 1700
CCT & DYNAMIC PLATFORMS	30K/40K/50K
CRI	80+
OPERATING TEMP.	-25°C to 45°C
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21





CONSTRUCTION

Die-cast aluminum guard/body and frosted globe. Integral heatsink fins provide excellent thermal management. One-piece silicone gasket provides watertight seal. Gray corrosion- and UV-resistant polyester powder coat finish.

IP55 Rating: Dust protection and complete protection against particles. Protection against moderately strong water jets.

OPTICS

Frosted lens provides even, glare-free illumination.

MOUNTING

For ceiling or wall mounting. Convenient, easy mount over standard 4" outlet box, or 1/2" conduit entryways. Also available for pendant/ceiling mounting orientation. Top, side and back conduit entry taps for through wiring or accessory mounting.

DRIVER ELECTRICAL INFORMATION

Powered by constant-current power LED drivers rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING

Non-dimmable.

WARRANTY

5-year limited warranty on parts and components (labor not included).

LISTINGS

ETL
Wet Location
IP55

Example: **OVT-LED-1000L/1400L/1700L-MVOLT-30K/40K/50K-GR-WM**

FIXTURE SIZE	LUMENS	VOLTAGE	CCT	FINISH	MOUNTING
OVT-LED	1000L/1400L/1700L	MVOLT 120-277V	30K/40K/50K	BK - Black GR - Gray	WM - Wall Mount CM - Ceiling Mount