




EASY 5 COLOR SWITCH



DIMENSIONS

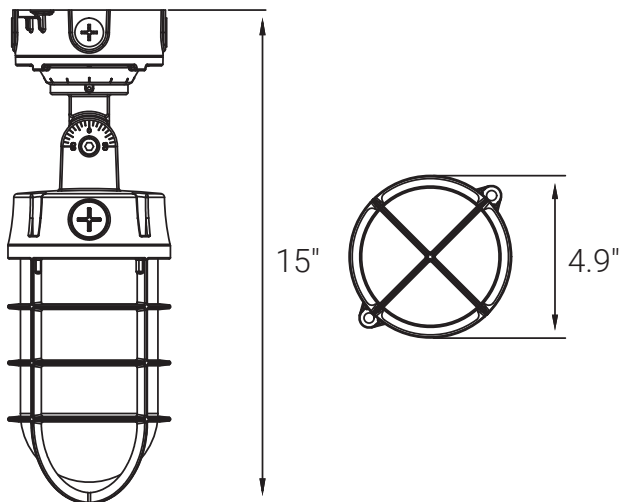

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1200L	1200L	12W
1600L	1600L	16W
2000L	2000L	20W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

OVT vapor tights are compact and versatile alternatives to traditional incandescent and CFL systems in both indoor and outdoor settings. For maximum flexibility, these luminaires are durable and feature adjustable heads, ceiling and wall mounting capabilities that make them ideal across different environments.

The OVT4 specifically features dynamic RGB color and cold and warm CCT options that can even bring vibrant color appeal to demanding or industrial settings.

IP65 and Wet Location rated. Ideal for building perimeters, courtyards, corridors, entry and walkways, stairwells, construction sites and industrial environments.

LUMENS	1200L/1600L/2000L
CCT	Red, Green, Blue and 30K/50K
CRI	85
COLOR QUALITY	2-Step MacAdam Ellipse
MOUNTING	Wall, Ceiling, and Pendant Mount
SIZE	15" x 4.92"
DIMMING	DIM10
FINISH	Gray (GR)
WORKING TEMPERATURE	-40 °F(4°C) to 122 °F(50 °C)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In accordance with IES LM79-08, TM-21

OPTICS

Features a UV stabilized polycarbonate frosted lens which diffuses light for a glare-free, smooth illumination and zero pixelation.

An adjustable head with 0° to 180° lockable mobility and versatile wall or ceiling mounting allows for precise and custom beam direction, according to application needs.

A multi-lumen package of 1000L/1600L/2000L makes for a bright but scalable power, while Red, Green, and Blue color options and a CCT package of 30K/50K offers dynamic color scenarios, as well as warm and cool color temperatures to suit different ambiances.

CONSTRUCTION

Body made with durable die-cast aluminum and features a lens guard for lens durability.

A gasketed, IP65 and wet location rated housing provides protection against water, dust, and pollution, for long lived peak function and weather resistant outdoor or industrial use.

Housing base features 4 gasket sealed knockouts for wiring.

Integrated photocell located on base of head.

On the opposite side, a marked knockout covers a multi-lumen, RGB color, and 30K, 50K CCT switch.

MAINTENANCE

OVT vapor tights may be periodically wiped down with a dry or damp cloth and are capable of withstanding low pressure washing.

MOUNTING AND INSTALLATION

Suitable for Wall, Pendant, and Ceiling Mounting.

The OVT luminaire base features two holes on the housing base platform which can be used to screw the luminaire directly onto the appropriate wall or ceiling for Pendant Mounting or Wall Mounting.

OPTIONS & ACCESSORIES

Includes a standard ON/OFF integrated Photocell which detects changing light levels and saves energy by turning the fixture off during the day.

DRIVER ELECTRICAL INFORMATION

DRIVER & ELECTRICAL INFORMATION

Driver is rated for 50 to 60Hz at 120-277V AC/DC input, produces less than 20% THD, has a power factor between 90% and 100%, and is thermally protected for additional safety.

DIMMING

DIM10 - Flicker Free 10% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277V.

WARRANTY:

5-Year warranty for parts and components (labor not included).

RATINGS

UL listed.

IP65 rated and suitable for outdoor wet location use.

UL Wet Location Rated

RoHs compliant – Contains no mercury or lead.

IK08 rated for impact resistance.

Example: **OVT4-LED-RGBCW-1200L/1600L/2000L-DIM10-MVOLT-85-GR-PM/WM-PHC**

OVT4-LED-RGBCW							
SERIES	LUMENS	DIMMING	VOLTAGE	CRI	FINISH	MOUNTING	OPTION
OVT4-LED-RGBCW	1200L/1600L/2000L	DIM10 - 0-10V Dimming	MVOLT	85	GR - Gray	PM/WM Pendant Mount and Wall Mount	PHC - (Included) Standard Photocell