



APPLICATION

For areas where security and facade lighting is required. Applications include industrial buildings, universities, schools, apartment buildings, institutions, and government buildings. Fixture is ideal for outdoor wall wash applications.

CONSTRUCTION

Die cast aluminum housing and grid front frame, textured powdercoat finish over a chromate conversion coating. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber.

FINISH - Dark bronze corrosion- and UV-resistant polyester powder finish is standard.

LENS - Standard opal polycarbonate lens.



INSTALLATION - Convenient, easy mount over standard 4" outlet box or use 1/2" surface conduit.

LISTINGS - CSA: Listed for wet locations, wall mount only

WARRANTY - Limited 1 Year Warranty.

All specifications are subject to change without notice

Dimensions:

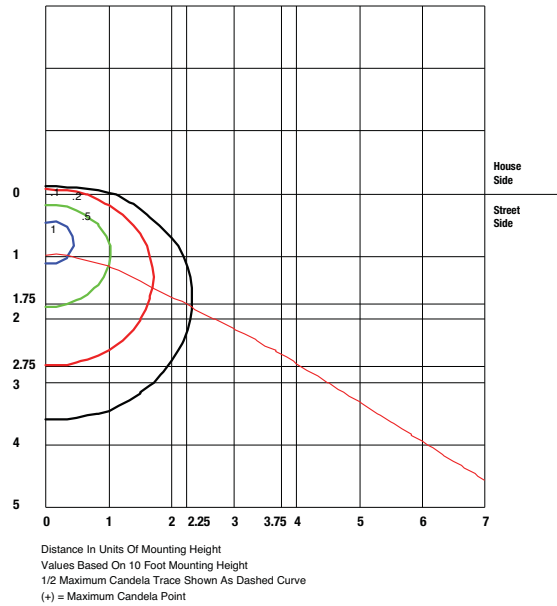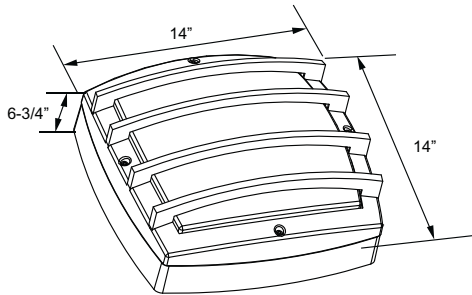

Ordering Information: Example: OWM-S-201-2-26-32-42-MVOLT-50K-BZ

OWM-S-201						
SERIES	LAMP TYPE/LUMEN	VOLTAGE	CCT	CRI	FINISH	OPTION
OWM-S-201-Oracle Square Wall Mount Medallion Grid Frame	CFL 2-26-32-42 - (2x26/32/42W CFL)	MVOLT	50K - (5000K) * For more CCT option, consult factory	85	BZ - Bronze WH - White BK - Black CUS - Custom color, consult factory	PHC - Photo cell