




**MULTI LUMEN  
SELECTOR**

**EASY 3 COLORS  
SELECTOR**  
3000K | 4000K | 5000K

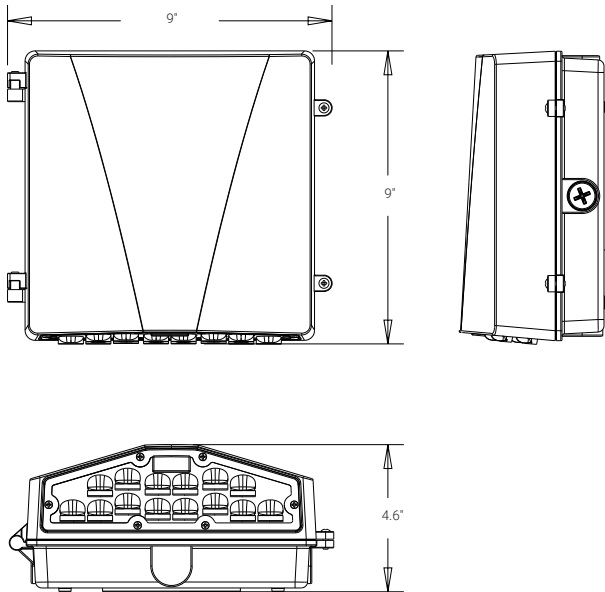

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
3000	2680	20 W
4000	4089	30 W
5000	5129	40 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

**FEATURES**

The Compact Slim LED wall pack provides outdoor emergency lighting for low mounting heights. The fully enclosed-and-gasketed housing is IP65-rated for full protection against water and dirt. Suitable for applications requiring Path of Egress lighting, including outdoor environments exposed to rain and extreme moisture such as parking decks, carports, and pathways. Full cut-off meets Dark Sky requirements. Luminaire includes photocell (not motion detector) and EMG standard. The unit can be controlled by a switch, timer, or photocell.

LUMENS	3000/4000/5000
CCT	30K/40K/50K
CRI	80 Standard
COLOR QUALITY	3 Step MacAdam Ellipse
MOUNTING	Surface Mount
FINISH	Bronze (BZ), Black (BK), White (WH)
DIMMING	0-10V Dimming
EMERGENCY	EMG-LED-OWP-VOLT-CP-4W
WORKING TEMPERATURE	0°C to 50°C Standard Model
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



#### CONSTRUCTION

- Die-cast aluminum housing with efficient heat sink.
- Fully enclosed-and-gasketed housing is IP65-rated per IEC 60529 for full protection against water and dirt.
- UV-resistant polycarbonate lens.

#### MOUNTING

Easy wall mount design with universal KO for quick installation in most standard-sized junction boxes. Includes one 1/2" NPT conduit entry on the top of the housing.

#### PHOTOCELL

Photocell (comes standard with fixture) detects changing light levels and saves energy by turning off during the day.

#### BACK-UP BATTERY

- Includes self-diagnostic/self-test feature to monitor proper operation
- Optional long-life 7.2V Nickel Cadmium battery for UL-recognized 90 minute operation
- Full re-charge within 24 hours after 90 mins discharge
- Provided with waterproof test switch and AC-On indicator

#### TWO OPTIONS AVAILABLE

1. Standard (photocell only)
  - a. On/off control by photocell.
  - b. Switching to wall control is available.
2. Photosensor + PIR
  - a. Control by photocell and PIR motion sensor.

#### ELECTRICAL

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Produces less than 20% THD and has a power factor of .90 to 1.00. Class 2 driver.

#### RATINGS

- cULus wet location rated.
- IP65-rated; completely sealed to protect against water and dirt.
- RoHS compliant.
- DLC-listed

Example: **OWP-FC-204-LED-3000/4000/5000-DIM10-MVOLT-30K/40K/50K-BZ-PHC**

OWP-FC-204-LED								
SERIES	LUMENS	DIMMING	VOLTAGE	CCT	FINISH	PHOTOCELL	EMERGENCY	OPTIONS
OWP-FC-204-LED WALLPACK	3000L/4000L/5000L	DIM10	MVOLT	30K/40K/50K	BZ - Bronze BK - Black WH - White SI - Silver	PHC (Standard)	EMG-LED-OWP-MVOLT-CP-4W	MS-OWP-NC-204/304 - Motion Sensor