

# OWP-FC-211-LED

LED Medium Full Cut-Off Wall Pack Series

**up to 75 Wattage / up to 9400 Lumens**

Catalog Number:

Project Name:

Note:

Type:




## APPLICATIONS:

This rugged medium size full cut-off LED wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications.


## FEATURES:

- Full cut-off and compliance to Dark Sky requirement
- Lumen output from 3400 - 9400lm with efficacy up to 158lm/W
- 20W-70W power consumption, to replace 100W MH and 175W MH
- Optional Motion sensor and Photocell
- Optional battery back-up option for emergency egress lighting
- Type III polycarbonate optical lens with integrated lens
- Operating temperature is -40°C to 50°C (-40°F to 122°F)
- Dimmable
- UL/cUL wet location

## DIMENSION:

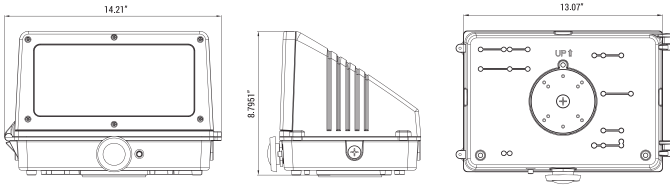

## PHOTOMETRICS:

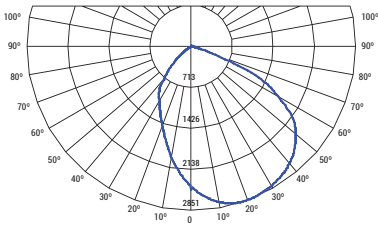

B	U	G
2	1	1

## SPECIFICATIONS:

<b>LUMENS</b>	3400/4500/6000/7500/9400 lumens
<b>WATTAGE</b>	20W/30W/40W/56W/70W
<b>CCT</b>	40K-50K
<b>CRI</b>	80
<b>LIGHT EFFICIENCY</b>	158 lumens/watt
<b>VOLTAGE</b>	120-277 VAC
<b>POWER FREQUENCY</b>	50/60 Hz
<b>FINISH</b>	Bronze
<b>APPLICABLE ENVIRONMENT</b>	Dry/Damp/Wet location
<b>WORKING TEMPERATURE</b>	-40°C to 50°C



## Ordering Guide > Example: OWP-FC-211-LED-3400L-DIM10-MVOLT-40K-BZ

SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-FC-211-LED	<b>3400L</b> - 3400 lumens <b>4500L</b> - 4500 lumens <b>6000L</b> - 6000 lumens <b>7500L</b> - 7500 lumens <b>9400L</b> - 9400 lumens	DIM10 - 0-10V Dimming	MVOLT - 120-277V	<b>40K</b> - 4000K <b>50K</b> - 5000K	BZ - Bronze	O-EMG-LED	<b>WPPHC</b> - Photocell <b>WPMS</b> - Motion Sensor <b>FSP211</b> - High/Low PIR Fixture Mount Sensor Line Voltage

\* For more options, consult factory

