

**SUGGESTED USE**

For areas where Type III distribution is required and/or Dark Sky security and facade lighting is required such as industrial buildings, universities, schools, apartment buildings, institutions, and government establishments.

**CONSTRUCTION**

Die-cast aluminum housing with hinged full cut-off front frame. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. The reflector is made of die-formed 95% specular anodized aluminum for high efficiency and Type II distribution. HID & HPS fixtures have porcelain 4KV pulse-rated medium-base socket with nickel-plated screw shell sockets. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

**FINISH** - Dark bronze corrosion-resistant polyester powder finish is standard

**LENS** - Frosted tempered flat glass lens.

**DISTRIBUTION** - Type III standard. For other distribution please consult factory.

**INSTALLATION** - Convenient cast-in template for easy mounting over standard 4" outlet box; or there are top, back, side 1/2" threaded hubs available for conduit entry.


**LISTINGS** - UL/C-UL for wet location.

**LAMP** - Included except for CFL option.

All specifications are subject to change without notice




**OWP-FC-301-MH-250-MVOLT**

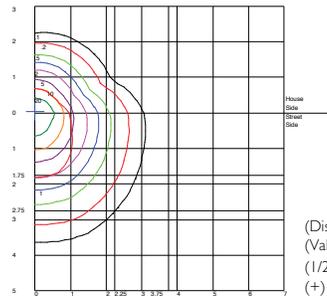

(Distance In Units Of Mounting Height)  
(Values Based On 10 Foot Mounting Height)  
(1/2 Maximum Candela Trace Shown As Dashed Curve)  
(+) = Maximum Candela Point

**Dimensions:**

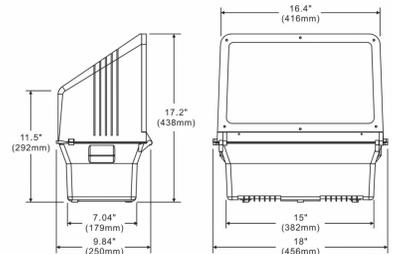

**Ordering Guide > Example: OWP-FC-301-MH-250-120-PC120-BZ**

<b>OWP-FC-301</b>					
<b>SERIES</b> OWP-FC-301	<b>WATTAGE</b> <b>HPS, MH</b> HPS-250 - (250W High Pressure Sodium) MH-250 - (250W Metal Halide)	<b>VOLTAGE</b> <b>HPS, MH<sup>1,4</sup></b> - 120 - MVOLT (120/208/240/277) - 347 <sup>5</sup> - 480 <sup>5</sup>	<b>OPTIONS</b> PC120 - Photo control (120V only) PC277 - Photo control (277V only) SF - Single fuse DF - Double fuse O-EMG-750 - 750 lum. Emg. (CFL only) XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	<b>COLOR</b> BZ - Bronze WH - White	<b>ACCESSORIES</b> OWP-FC-301-RL - Replacement lens kit
	<b>CFL</b> CFL-2X26 - (2X26W Compact Fluorescent) CFL-2X32 - (2X32W Compact Fluorescent) CFL-2X42 - (2X42W Compact Fluorescent)	<b>CFL<sup>2,3,4</sup></b> - 120 - MVOLT(120/277) - 208 - 240 - 347			

**NOTES:**

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
- 4 (Consult factory) for other wattages and options.
5. 347 & 480 Volt not available on 50 & 70W fixture.