

OWP-FC-311-LED

LED Large Full Cut-Off Wall Pack Series

up to 135 Wattage / up to 18000 Lumens

Catalog Number:

Project Name:


Note:

Type:



EASY 3 COLORS
SELECTOR
3000K • 4000K • 5000K

DIMENSION:

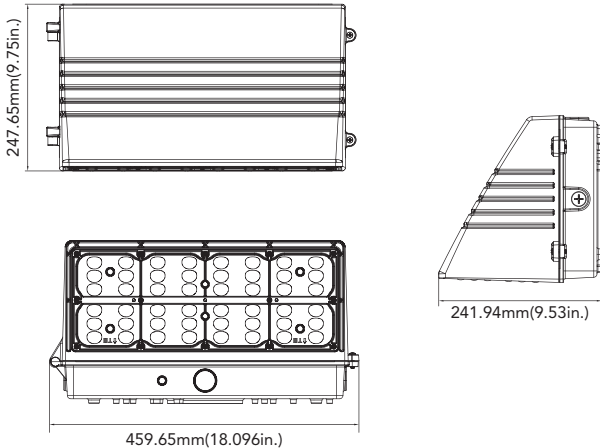

APPLICATIONS:

This rugged large size full cut-off LED wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications.

FEATURES:

- Full cut-off and compliance to Dark Sky requirement
- Lumen output from 9000 - 18000lm with efficacy up to 160lm/W
- 77W-135W power consumption, to replace 250W MH and 400W MH
- Motion sensor and Photocell
- Optional battery back-up option for emergency egress lighting
- Type III polycarbonate optical lens with integrated lens
- Operating temperature is -40°C to 50°C (-40°F to 122°F)
- Dimmable
- UL/cUL wet location

SPECIFICATIONS:

LUMENS	9000/ 12000 / 15000 / 18000 lumens
WATTAGE	54W / 81W / 108W / 135W
CCT	30K/40K/50K
CRI	80
LIGHT EFFICIENCY	up to 160 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 50°C



Ordering Guide > Example: OWP-FC-311-LED-9000/12000/15000/18000L-DIM10-MVOLT-30K/40K/50K-BZ

OWP-FC-311-LED							
SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-FC-311-LED	9000/12000/15000/18000L	DIM10 - 0-10V Dimming	MVOLT - 120-277V	30K/40K/50K	BZ - Bronze	0-EMG-LED	WPPHC - Photocell WPMS - Motion Sensor FSP311-B - 0-10V continuous dimming PIR photo/motion sensor with bluetooth control option. FSP211 - High/Low PIR Fixture Mount Sensor Line Voltage ZLDOZ-10W - IP66 PIR Integrated Sensors with Bluetooth™ Connectivity and UV Stable Plastic

* For more options, consult factory



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

Issued-B1118-Rev. 1