




**MULTILUMEN
SELECTOR**

EASY 3 COLORS
SELECTOR
3500K • 4000K • 5000K

DIMENSIONS

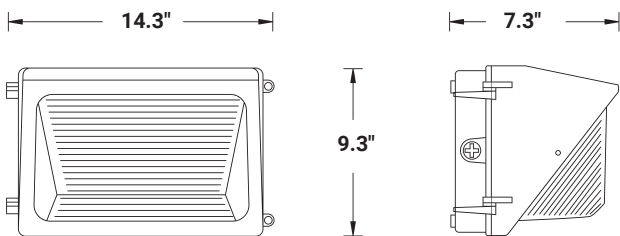

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
11000	20771	158 W
10000	20096	150 W
9000	13271	91 W
7000	11208	83W
6000	10588	71 W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES

LED wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Keeping with the look of a traditional MH wall pack, while reducing energy consumption up to 80% and lasting over 50,000 hours. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications.

MULTI LUMEN/MULTI CCT

Easily field-selectable multi-lumen and multi-CCT selector switches allow you to easily change the intensity and CCT in the field.

LUMENS	6000/7000/9000/10000/11000
CCT	30K/40K/50K
CRI	80+ Standard
COLOR QUALITY	3 Step MacAdam Ellipse
MOUNTING	Surface
DIMMING	DIM10 (0-10 dimming)
FINISH	Bronze, White
BEAM ANGLE	110°
WORKING TEMPERATURE	-40°C to 40°C (-22°F to 122°F)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

OPTICS

No UV or IR in the beam. Light is soft and uniform, safe to eyes. Stripe glass Diffuser.

CONSTRUCTION

Constructed from one-piece, die-cast aluminum housing, featuring an open front frame with a textured powder-coat finish over a chromate conversion coating. Chromate conversion coating provides excellent corrosion resistance and a higher electrical surface resistance. The housing is sealed with a one-piece silicone gasket that protects the optical assembly from outside contaminants.

MOUNTING

Wall mounted for area light delivering uniform, widespread high output.

OPTIONS & ACCESSORIES

Options and Accessories

Optional emergency battery back-up (EMG) option for emergency egress lighting

Optional photocell (PHC) detects changing light levels and saves energy by turning off during the day

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277.

WARRANTY

Five-year warranty for parts and components (labor not included).

LISTING

cULus Listed
Wet Location Listed
Dark Sky Compliant

Example: **OWP-NC-201-LED-6000L/7000L/9000L/10000L/11000L-DIM10-MVOLT-30K/40K/50K-BZ**

OWP-NC-201-LED						
SERIES	LUMENS	DIMMING	VOLTAGE	CCT	FINISH	OPTION
Wall Mount Wall Pack	6000L/7000L/9000L/10000L/11000L	DIM10 - 0-10V Dimming	MVOLT	30K/40K/50K	WH - White BZ - Bronze	PHC - Photocell EMG - Emergency MS - Motion Sensor PIR - PIR Sensor