

SUGGESTED USE

For most commercial general-purpose medium to large areas outdoor lighting applications requiring high efficiency. Fixture is designed with no cut-off feature, allowing the fixture to cast illumination into 180 degree direction. Prismatic clear glass refractor is designed to symmetrically spread a uniform lighting distribution. Not appropriate for direct high-pressure water applications.

CONSTRUCTION

Die-cast aluminum housing with hinged door frame. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. The reflector is made of die-formed specular anodized aluminum for high efficiency. HID & HPS fixtures have 4KV pulse-rated mogul-base socket with nickel-plated screw shell sockets. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Dark bronze corrosion-resistant polyester powder finish is standard.

LAMP - Included except for CFL option.

LENS - Prismatic glass refractor made of borosilicate material. Heat and tamper-proof.


INSTALLATION - Convenient, easy mount over standard 4" outlet box or use 1/2" surface conduit. Top, side and back conduit entry taps.

LISTINGS - UL/C-UL for wet location.


All specifications are subject to change without notice



OWP-NC-301-MH-250-MVOLT



Dimensions:

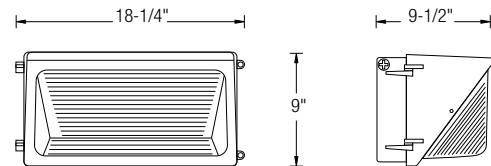

Ordering Guide > Example: OWP-NC-301-MH-250-120-PC120-BZ

OWP-NC-301					
SERIES OWP-NC-301	WATTAGE HPS, MH HPS-250 - (250W High Pressure Sodium) MH-250 - (250W Metal Halide)	VOLTAGE HPS, MH^{1,4} - 120 - MVOLT (120/208/240/277) - 347 ⁵ - 480 ⁵	OPTIONS SWG - Steel Wire Guard PC120 - Photo control (120V only) PC277 - Photo control (277V only) SF - Single fuse DF - Double fuse GS - Glare Shield O-EMG-750 - 750 lum. Emg. (CFL only) XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	COLOR BZ - Bronze WH - White	ACCESSORIES OWP-NC-301-RL - Replacement lens kit
	CFL CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) CFL-1X42 - (1X42W Compact Fluorescent) CFL-2X26 - (2X26W Compact Fluorescent) CFL-2X32 - (2X32W Compact Fluorescent) CFL-2X42 - (2X42W Compact Fluorescent)	CFL^{2,3,4} - 120 - MVOLT(120/277) - 208 - 240 - 347			

NOTES:

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
- 4 (Consult factory) for other wattages and options.
5. 347 & 480 Volt not available on 50 & 70W fixture.