

OWP-SL-101-LED-ML-CCT

LED Die-Cast Slimline Multi Lumen/CCT Wall Pack Series

Catalog Number:


Project Name:

Note:

Type:



EASY 3 COLORS
SELECCTOR
3000K • 4000K • 5000K

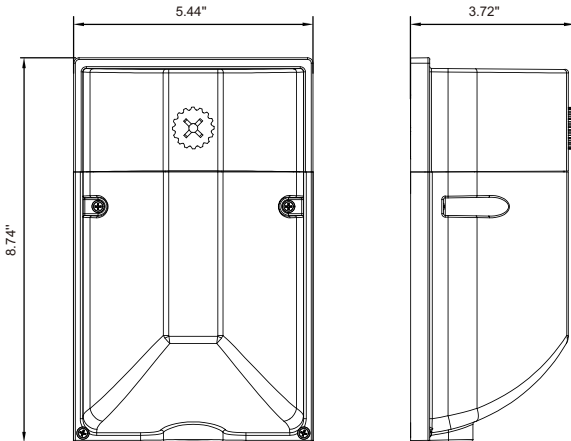

B	U	G
1	2	1



* For list of qualified
DLC fixture, please
consult factory

APPLICATIONS:

The Slimline Wall Pack maintains a traditional appearance while reducing energy consumption by over 75%. Dusk to dawn technology ensures that the fixture will automatically turn on when light is needed. Easily access field-adjustable 3-Color SeleCCT from 3000K/4000K/5000K and 3 lumen 2000L/2500L/3000L. An ideal solution for multi-family, residential, apartments, mobile home parks, and university housing.

FEATURES:

- Sealed die-casting profile for outdoor applications
- Consumes 30W to replace 75W HID
- MVOLT (120-277V)
- Lumen output of 3000 lumens
- Long lasting with lifespan 50,000 hrs
- Built-in UL Class 2 LED driver, 120-277V photocell included
- UL Wet location listed
- Lumen output from 2000-3000Lm with efficacy up to 110lm/W
- Operating temperature is -40°F to 104°F
- UL/cUL wet location
- CCT Option Easily access field-adjustable 3-Color SeleCCT from 3000K/4000K/5000K or switch without lowering the luminaire from the ceiling.
- Surface mount with J-BOX ; Pendant installation with 3/4 inch conduit

SPECIFICATIONS:

LUMENS	2000/2500/3000L lumens
WATTAGE	18W/24W/30W
CCT	30K/40K/50K
CRI	80
VOLTAGE	120-277 V
POWER FREQUENCY	50/60 Hz
FINISH	Bronze, White, Black
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location

Ordering Guide > Example: **OWP-SL-101-LED-2000L/2500/3000L-MVOLT-30K/40K/50K-BK**

OWP-SL-101-LED				
SERIES	PERFORMANCE	VOLTAGE	CCT	FINISH
OWP-SL-101-LED-ML-CCT	2000/2500/3000L	MVOLT - 120/277V	30K/40K/50K	BZ - Bronze WH - White BK - Black

INSTALLATION:

Convenient cast-in template for easy mounting over a standard 4" outlet box. Bottom and back 1/2" threaded hubs available for conduit entry.

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.