



SUGGESTED USE

For general and security lighting for parking garages, ramps, walkways, loading docks, apartment buildings, recreation facilities, warehouses and any other type of entrances.

CONSTRUCTION

Die-cast aluminum housing and front frame with hood. Includes weatherproof hardware. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. The reflector is made of die-formed specular anodized aluminum for high efficiency. HID & HPS fixtures have porcelain 4KV pulse-rated medium-base socket with nickel-plated screw shell sockets. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Dark bronze corrosion-resistant polyester powder finish is standard.

LENS - Prismatic glass refractor designed to maximize light output by directing the light source both out and down.

INSTALLATION - Convenient, easy mount over standard 4" outlet box; or use 1/2" surface conduit.


LISTINGS - UL/C-UL for wet location.

LAMP - Included except for CFL option.


All specifications are subject to change without notice



Dimensions:

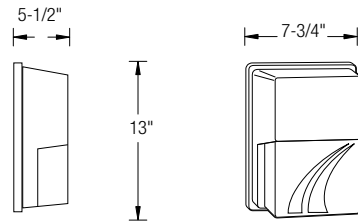

OWP-SL-101-MH-70-120

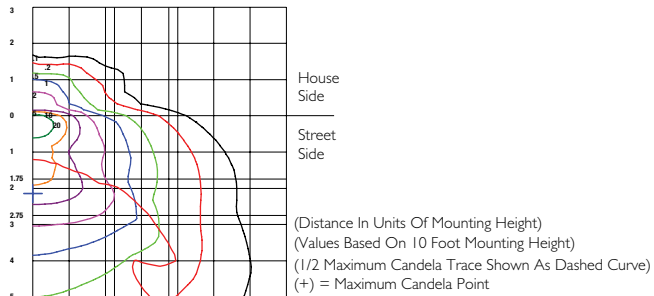

Ordering Guide > Example: OWP-SL-101-MH-75-120-PC120-BZ

| | | | | | |
|-----------------------------|--|---|--|---|--|
| OWP-SL-101 | | | | | |
| SERIES OWP-SL-101 | WATTAGE HPS, MH HPS-35 - (35W High Pressure Sodium) HPS-50 - (50W High Pressure Sodium) HPS-70 - (70W High Pressure Sodium) HPS-100 - (100W High Pressure Sodium) MH-50 - (50W Metal Halide) MH-70 - (70W Metal Halide) MH-100 - (100W Metal Halide) CFL CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) CFL-1X42 - (1X42W Compact Fluorescent) | VOLTAGE HPS, MH^{1,4} - 120 - MVOLT (120/208/240/277) - 347 ⁵ - 480 ⁵ CFL^{2,3,4} - 120 - MVOLT(120/277) - 208 - 240 - 347 | OPTIONS PC120 - Photo control (120V only) PC277 - Photo control (277V only) SF - Single fuse DF - Double fuse XT - 20°F/-30°C Min. Temp. Bal. (CFL only) | COLOR BZ - Bronze WH - White | ACCESSORIES OWP-SL-101-RL - Replacement lens kit |

NOTES:

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
4. (Consult factory) for other wattages and options.
5. 347 & 480 Volt not available on 50 & 70W fixture.