

SUGGESTED USE

For general and security lighting for parking garages, ramps, walkways, loading docks, apartment buildings, recreation facilities, warehouses and any other type of entrances.

CONSTRUCTION

High-impact polycarbonate housing and front frame with hood. Includes weatherproof hardware. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. The reflector is made of die-formed specular anodized aluminum for high efficiency. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Dark bronze corrosion-resistant polyester powder finish is standard.

LENS - Prismatic polycarbonate refractor designed for excellent glare control.

INSTALLATION - Convenient, easy mount over standard 4" outlet box; or use 1/2" surface conduit.


LISTINGS - UL/C-UL for wet location.

LAMP - Not Included.


All specifications are subject to change without notice



OWP-SL-102-CFL-1X26-MVOLT

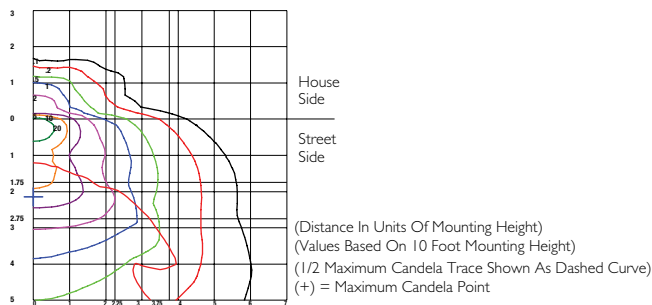

Dimensions:

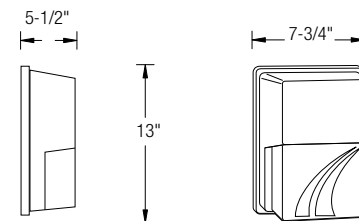

Ordering Guide > Example: OWP-SL-102-CFL-1X26-120-PC120-BZ

OWP-SL-102					
SERIES OWP-SL-102	WATTAGE CFL CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) CFL-1X42 - (1X42W Compact Fluorescent)	VOLTAGE CFL ^{2,3,4} - 120 - MVOLT(120/277) - 208 - 240 - 347	OPTIONS PC120 - Photo control (120V only) PC277 - Photo control (277V only) SF - Single fuse DF - Double fuse XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	COLOR BZ - Bronze	ACCESSORIES OWP-SL-102-RL - Replacement lens kit

NOTES:

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
4. (Consult factory) for other wattages and options.