



DIMENSIONS

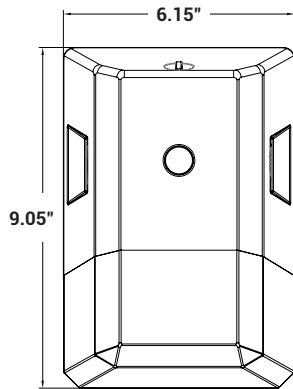

FRONT VIEW



SIDE VIEW

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1000L	1120L	8W
2000L	2100L	15W
3000L	3500L	25W

Based on 4000K, 80+ CRI. Actual wattage may vary +/- 5%

FEATURES

SLIM, ADJUSTABLE, ADAPTABLE

This durable wall pack features a slim, modern design, and a unique adjustable cut-off distribution for reduced light pollution. Selectable lumen and CCT options and an integrated photocell make it a versatile and energy efficient solution. Ideal for general illumination of building perimeters, walkways, and entryways in parking garages, loading docks, apartment buildings, recreation facilities, and warehouses. Lightweight and easy to install. Dark Sky friendly and wet location rated for safe outdoor use.

LUMENS	1000L/2000L/3000L
CCT	30K/40K/50K
CRI	80+ Standard
COLOR QUALITY	5-Step MacAdam Ellipse
MOUNTING	Wall Mount
DIMMING	DIM10 - 1% Flicker-free 0-10V Dimming
DISTRIBUTION	Type IV (115° Beam Angle)
FINISH	Bronze (BZ), Black (BK), White (WH), Custom (RAL)
WORKING TEMP.	-40°C to 50°C (-40°F to 122°F)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC	In accordance with IES LM79-08, LM80 and TM-30, TM-21

BUG RATING	B:1	U:3	G:1
------------	-----	-----	-----

Type IV



Type IV Distribution – long, forward throwing, wide semi-circle lighting ideal for illuminating building and wall perimeters.



OPTICS

Features a prismatic polycarbonate lens for optimal beam diffusion and gentle illumination. A standard 115° beam angle makes for a wide, Type IV distribution.

A dial at the top of the fixture lowers an internal reflector behind the lens to allow for optional cut-off distributions for more focused light and reduced glare and light pollution.

Powered by energy efficient, long lasting 2835 LEDs for an extended luminaire lifetime and environmental friendliness.

Three selectable color temperatures of 30K/40K/50K enable different warm to cool moods and atmospheres. A selectable lumen package of 1000L/2000L/3000L allows for customizable intensity, for a variety of uses.

CCT factory set to 50K; lumen factory set to 3000L.

CONSTRUCTION

Features a durable, heat resistant die-cast aluminum body. Fully enclosed-and-gasketed construction for protection against water and dirt.

Dial for cut-off distribution located at top of the fixture and turns 180° to lower or raise internal reflector for cut-off or non-cut-off distributions.

Integrated photocell located on left side; convenient multi-lumen and CCT switches located alongside photocell, behind same knockout cap.

Available in a standard bronze finish; consult factory for custom RAL colors.

MOUNTING

Suitable for wall-mounting at a height of at least four feet from the ground. Single screw design connects through the luminaire to the patented wall bracket for easy and effortless installation. Bracket can be directly set over a standard junction box—supplied by others—and can be surface wired using the entry on the back.

MAINTENANCE

Fixture may be wiped down with a dry or damp cloth for optimal performance.

OPTIONS & ACCESSORIES

Includes a standard ON/OFF integrated Photocell which detects changing light levels and saves energy by turning the fixture off during the day.

DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. 2KV surge protection.

DIMMING

DIM10 - 1% flicker-free 0-10V dimming at 120-277V.


WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

cULus listed for Wet location.
DLC listed.

INCLUDED FEATURES

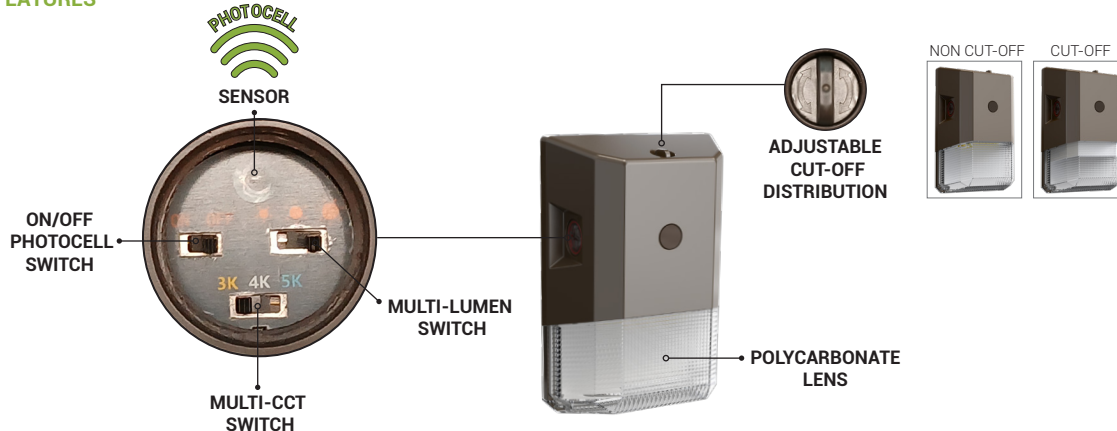

Example: **OWP-SL-104-LED-1000L/2000L/3000L-DIM10-MVOLT-30K/40K/50K-BZ**

OWP-SL-104-LED					
SERIES	LUMENS	DIMMING	VOLTAGE	CCT	FINISH
OWP-SL-104-LED	1000L/2000L/3000L	DIM10 0-10V	MVOLT 120-277V	30K/40K/50K	BK - Black BZ - Bronze WH - White RAL - Custom