



SUGGESTED USE

For areas where Type II distribution is required and/or Dark Sky security and facade lighting are required. Applications include industrial buildings, universities, schools, apartment buildings, institutions, and government establishments. Fixture is ideal for outdoor wall wash applications. Meets Dark Sky compliance requirements.

CONSTRUCTION

Die-cast aluminum housing. The reflector is made of die-formed 95% specular anodized aluminum for high efficiency and Type II distribution. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. HID & HPS fixtures have porcelain 4KV pulse-rated medium-base socket with nickel-plated screw shell sockets. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Dark bronze corrosion-resistant polyester powder finish is standard.

LENS - Flat, tempered glass lens.

DISTRIBUTION - Type II standard. For other distribution please consult factory.


INSTALLATION - Fixture easily mounts directly over a 4" recessed outlet box. Includes "Easy Hang" wall mounting bracket.

LISTINGS - UL/C-UL for wet location.


LAMP - Included except for CFL option.

All specifications are subject to change without notice

OWS-FC-202-MH-100-120

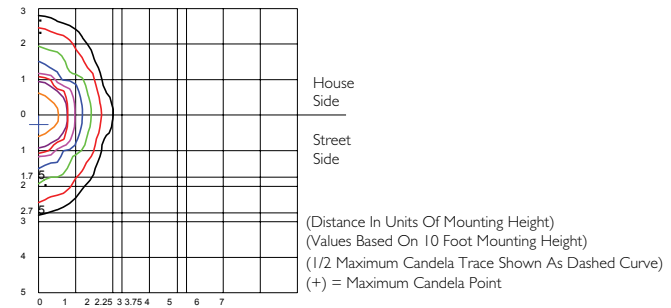

Dimensions:

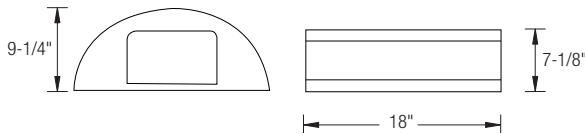

Ordering Guide > Example: OWS-FC-202-MH-100-120-PC120-BZ

OWS-FC-202					
SERIES OWS-FC-202	WATTAGE HPS, MH HPS-50 - (50W High Pressure Sodium) HPS-70 - (70W High Pressure Sodium) HPS-100 - (100W High Pressure Sodium) MH-50 - (50W Metal Halide) MH-70 - (70W Metal Halide) MH-100 - (100W Metal Halide) CFL CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) CFL-1X42 - (1X42W Compact Fluorescent) CFL-2X26 - (2X26W Compact Fluorescent)	VOLTAGE HPS, MH^{1,4} - 120 - MVOLT (120/208/240/277) - 347 ⁵ - 480 ⁵ CFL^{2,3,4} - 120 - MVOLT(120/277) - 208 - 240 - 347	OPTIONS PC120 - Photo control (120V only) PC277 - Photo control (277V only) SF - Single fuse DF - Double fuse O-EMG-750 - 750 lum. Emg. (CFL only) XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	COLOR BZ - Bronze WH - White SI - Silver	ACCESSORIES OWS-FC-202-RL - Replacement lens kit

NOTES:

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
4. (Consult factory) for other wattages and options.
5. 347 & 480 Volt not available on 50 & 70W fixture.