




EASY 5 COLORS
SELECTOR
2700K • 3000K • 3500K • 4000K • 5000K

Dimensions


SQ
Up/Down Lens - Top/Bottom View




RD
Up/Down Lens - Top/Bottom View



Frontal View

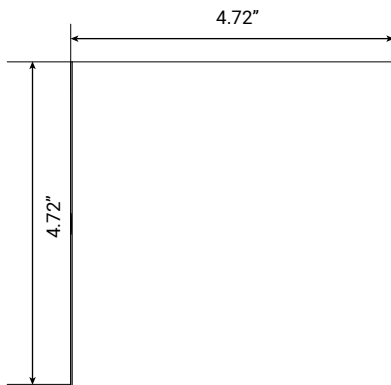

Side View

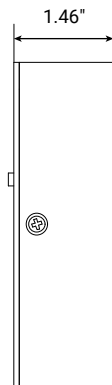


NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1000L	1045L	13W

Based on 4000K, 90+ CRI. Actual wattage may vary +/-5%

FEATURES

This elegant square wall sconce features a modern design with an aluminum body and glass diffuser, delivering a high-end architectural look. Engineered for versatility, it supports Up & Down, Up only, or Down only lighting configurations to suit a wide range of design applications. Field-selectable CCTs and TRIAC dimming (at 120V) allow for customizable ambiance and energy-efficient operation. Compatible with AC120-277V input, the fixture is IP65 rated for wet locations and built to last with a rated lifespan of over 50,000 hours. Ideal solution for building facades, entryways, corridors, and walkways.

LUMENS	500L Up/Down
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
MOUNTING	Wall Mount
VOLTAGE	120-277VAC
DIMMING	Triac Dimming at 120V, Non-Dimming at 277V
RATING	IP65
BEAM ANGLE	90° Up and Down
FINISH	BZ (Bronze), BK (Black), WH (White), SI (Silver)
OPERATING TEMP	-40°C (-40°F) to 50°C (122°F)
LIFETIME	L70 AT 50,000 Hours



90° Up and Down



OPTICS

Features a glass lens diffuser for uniform light diffusion and glare control. Powered by ultra efficient LEDs for extended lifetime and optimal performance.

Luminaire available in 1000L with five selectable color temperatures of 2700K/3000K/3500K/4000K/5000K enable different warm to cool moods and atmospheres.

CCT factory set to 50K.

CONSTRUCTION

Features a durable aluminum housing for lightweight handling and installation and optimal thermal conduction.

Fully enclosed-and-gasketed construction for IP65-rated protection against water and dirt.

Available in white, bronze, black, and silver finishes.

MOUNTING

Wall Mount

Designed specifically for direct wall mounting applications. Ideal for building facades entryways, doorways, walkways, pathways, patios, porches, garage exteriors, perimeter walls, outdoor stairwells, commercial storefronts, hospitality exteriors (hotels, restaurants), parking structure walls.

INSTALLATION

Up/Down: Mount fixture vertically to provide simultaneous upward and downward illumination.

Up Only: Install with the bottom opening sealed; light will emit upward only.

Down Only: Install with the top opening sealed; light will emit downward only.

DIMMING & DRIVER INFORMATION

DIMTR - TRIAC. Available in 120V.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS


ETL listed.

IP65 rated.

Wet Location certified.

ADA compliant.

Example: **OWS-FC-212-LED-SQ-1000L-DIMTR-120/MVOLT-2700K/3000K/3500K/4000K/5000K-BK**

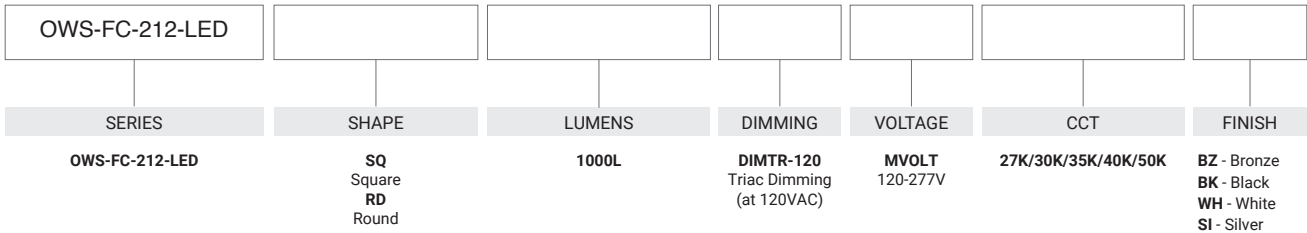

OWS-FC-212-LED-SQ-1000L-DIMTR-120/MVOLT-2700K/3000K/3500K/4000K/5000K-BK


TEST NO.: **EL06122509**

INPUT WATTS: **13.4**

LUMENS: **1045**

EFFICACY: **78**


CANDELA DISTRIBUTION



CANDELA TABLE

	0°	90°
0°	487	487
10°	472	474
20°	425	438
30°	344	383
40°	250	311
50°	167	232
60°	100	155
70°	52	87
80°	17	30
90°	0	1

ROADWAY ISO-ILLUMINANCE

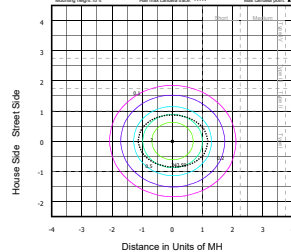

ZONAL LUMEN SUMMARY

ZONE	UMENS	% LUMINAIRE
0° - 20°	174	17%
0° - 30°	359	34%
0° - 40°	562	54%
0° - 60°	892	85%
0° - 80°	1034	99%
0° - 90°	1045	100%